

Bridge™

Bridge 1000_SDA

4X1 SELECTOR DA



4X1 SELECTOR DA Mini Type Converter



Bridge 1000_SDA



Descriptions

Bridge 1000_SDA is SDI 4 x1 Selector distributor.
The selected SDI signal is output as four SDI signals.
It supports up to 1080p60 format, remote control is possible with RS-232 or RS-422.

Feature

- SDI 4 x1 Selector DA
- 4 SDI Select input (SD/HD/3G)
- 1 Selected source to 4 SDI out (SD/HD/3G)
- RS422 or RS232 remote control enable
- DC 7V ~ 17V wide operating range


Physical

Dimension (W x H x D)	106 x 96 x 30 (mm)
Weight	225g
Power Level	7 ~ 17 VDC
Power Consumption	3.5Watts (Max : 4Watts)
Operating Temperature	-20 °C ~ 70 °C
Humidity	0 to 95% RH, non-condensing

Image View



Drawing Dimension [mm]

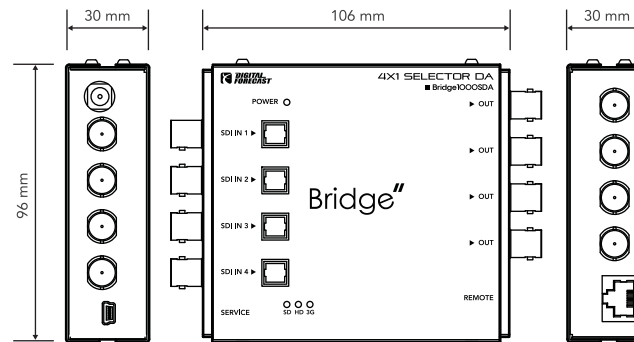

Digital Video Specs.

- Supports multi-rate SDI formats
- SMPTE 125M: NTSC (480i 59.94), PAL (576i 50)
- SMPTE 296M: 720p (60/59.94/50)
- SMPTE-274M, SMPTE-292M: 1080i (60/59.94/50)
- SMPTE-424M: 1080p (30/29.97/25/24/23.98)
- SMPTE-424M: 1080p (60/59.94) 3G

Format Support

Input Format	Output Format	480i (NTSC)	576i (PAL)	480P	576P	720P24	720P25	720P30	720P50	720P59.94	720P60	1080i50	1080i59.94	1080i60	1080p24	1080p25	1080p30	1080p50	1080p59.94	1080p60
480i (NTSC)		●																		
576i (PAL)			●																	
480P				●																
576P					●															
720P24						●														
720P25							●													
720P30								●												
720P50									●											
720P59.94										●										
720P60											●									
1080i50												●								
1080i59.94													●							
1080i60														●						
1080p24															●					
1080p25																●				
1080p30																	●			
1080p50																		●		
1080p59.94																			●	
1080p60																				●