

635A & 635A/B  
Dynamic Omnidirectional  
Microphones



**Key Features:**

- Practically indestructible in normal use
- Steel housing provides magnetic shielding and strength
- Withstands humidity, salt air, and severe mechanical shocks
- Self generating, no powering required
- Uniform 80-13,000 Hz response



**General Description:**

The Electro-Voice 635A and 635A/B are designed for exacting professional applications such as film production, recording, broadcasting, and the more demanding PA applications. The high output level, and low sensitivity to mechanical shock, make the 635A and 635A/B excellent for interviews and for pass-around use in audiences. The 635A and 635A/B feature a diaphragm which permits very smooth response over a wide frequency range. The diaphragm withstands humidity and temperature extremes, corrosive effects of salt air, and severe mechanical shocks. It is practically indestructible with normal use. A four-stage pop and dust filter ensures a completely pop-free performance and virtually eliminates the need for an external windscreen during outdoor use. An internal shock absorber effectively reduces the pickup of cable and other noise generated by external contact.

**Technical Specifications:**


Generation Element:	Dynamic
Frequency Response:	80 Hz to 13,000 Hz (see chart)
Polar Pattern:	Omnidirectional
Impedance (Low):	150 $\Omega$
Sensitivity, Open Circuit Voltage, 1 kHz:	1.4 mV/Pascal
Polarity:	Pin 2 positive, referenced to pin 3 with positive pressure on diaphragm
Case Material:	Steel
Finish:	635A Fawn Beige 635A/B Semi-Gloss Black
Accessories Included:	311 Stand Adapter
Optional Accessories:	314E Windscreen 422A Desk Stand
Dimensions:	Length = 151 mm (5.94 in) Diameter = 36 mm (1.41 in)
Net Weight:	170 grams (6 oz)
Shipping Weight:	Single Mic = 454 grams (16 oz)




## Architects' and Engineers' Specifications:

The microphone shall be an Electro-Voice 635A or 635A/B. The microphone shall be an omnidirectional dynamic type with wide range response uniform from 80-13,000 Hz. It shall have a four-stage pop filter, and magnetic shield to prevent dust and magnetic particles from reaching the diaphragm. The impedance shall be such that the microphone will match 50-, 150- and 250-ohm inputs. The line shall be balanced to ground and phased. The output level shall be -55 dB with 0 dB equaling 1.4 mV/Pascal. The magnetic circuit shall be a nonwelded circuit and employ Alnico V and magnetic iron. The case shall be made of steel. The microphone shall have a maximum diameter of 36 mm (1.41 in), a length of 151 mm (5.94 in) and a weight of 170 grams (6 oz) The Electro-Voice 635A and 635A/B are specified.


## Dimension Drawing:

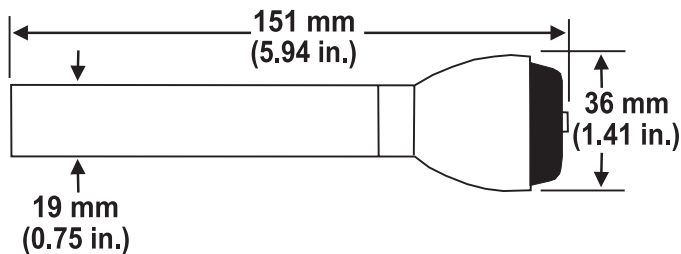

## Frequency Response:

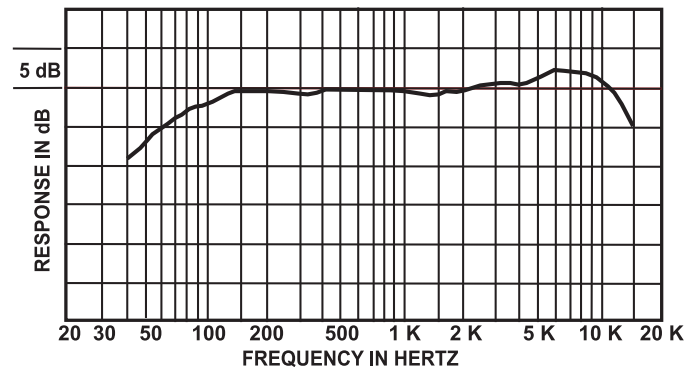

## Wiring Diagram:

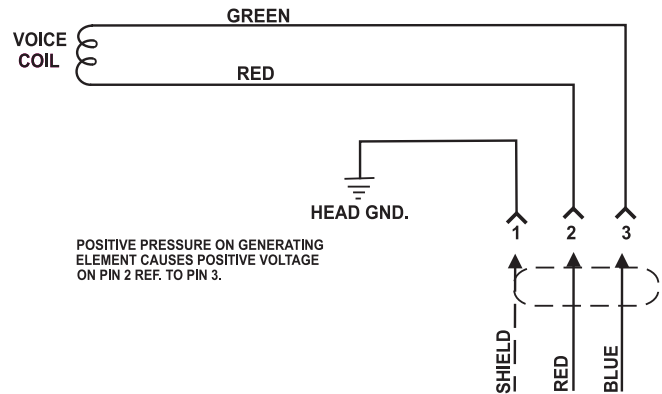

## Warranty:

Please refer to the Limited Warranty information found at: [www.electrovoice.com](http://www.electrovoice.com)

## Electro-Voice

12000 Portland Avenue South, Burnsville, MN 55337  
Phone: 952/884-4051, Fax: 952/884-0043

[www.electrovoice.com](http://www.electrovoice.com)

© Bosch Communications Systems 10/2012  
Part Number F01U179687 Rev 07



U.S.A. and Canada only. For customer orders, contact Customer Service at:  
800/392-3497 Fax: 800/955-6831  
Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:  
+ 49 9421-706 0 Fax: + 49 9421-706 265  
Other International locations. For customer orders, Contact Customer Service at:  
+ 1 952 884-4051 Fax: + 1 952 887-9212  
For warranty repair or service information, contact the Service Repair department at:  
800/685-2606  
For technical assistance, contact Technical Support at: 866/78AUDIO

Specifications subject to change without notice.