

# G-Speaker

## Full Range Personal Monitor & PA System

**GPS-8**

New for 2016 is the Galaxy Audio GPS-8 full range personal monitor PA system that packs huge sound while remaining compact and versatile. The GPS-8 is a powered, 200 watt, two-way, compact PA speaker with a unique asymmetrical shape which allows for wedge placement or pole mounting. The GPS-8 features an 8" low frequency driver and a 1" compression driver. The GPS-8 features a Bass Boost which will enhance the low end response to deliver that extra thump.

The GPS-8 has a mic/line switch, as well as a variable gain control, giving it the capability of accepting most any input level. The handy XLR/1/4" combo input jack accepts balanced and unbalanced signals. There is an LED to indicate when switched into mic level position. You can tell at a glance your input status via the green LED for signal input, and the red LED indicating the on board limiter is functioning and that the level should be reduced.

To make linking of units a breeze, an XLRM pass-through jack is included. This is unaffected by the input level control, to make it simple to adjust levels of units independently. Other features of GPS-8 include: Lighted power switch, switchable 110V/220V mains power, integrated carry handle and a lightweight, durable, compact, attractive, housing.

- 2-Way System
- 200 Watts
- Built-in Compressor/Limiter
- Switchable Mic/Line Input (XLR/1/4" Combo)
- Integrated Handle
- Wedge Shape Design
- Speaker Pole Mount
- Fly Points
- Pass Thru Allows for Connection of Multiple Units



MAKERS OF THE ORIGINAL  
HOT SPOT PERSONAL MONITOR

# G-Speaker

## Full Range Personal Monitor & PA System

## GPS-8

### Specifications

**Frequency Response:** ( $\pm 3$  dB) 75 Hz - 17.5 kHz

**Output/Peak:** 200 Watts

**Sensitivity:** 100 dB, 1 W @ 1 m

**Speaker Compliment:** 8" Diameter Woofer, 1" Compression Driver

**Nominal Coverage Pattern:** 90° H x 60° V

**Input Connections:** One - XLR/1/4" Balanced/Unbalanced

**Output Connections:** One - XLR Balanced

**Controls:** Level, Mic/Line, Bass Boost +3 dB @ 90 Hz, Power

**Indicators:** Power, Signal, Limit, Mic

**Protection:** Limit, Thermal, Over-Excursion

**Power Supply:** 115/230 VAC, 2A

**Enclosure Material:** ABS Plastic, Steel Grill

**Mounting/Rigging:** 1-3/8" (35 mm) Pole Socket,  
Four M8 T-nut Mounting Points

**Handle:** Integrated

**Color:** Black


**Accessories:** N/A

**Dimensions:** 16.34" x 11.6" x 8.66" (HxWxD)  
(415 x 295 x 220 mm)

**Weight:** 17 lbs (7.7 kg)



Bottom image

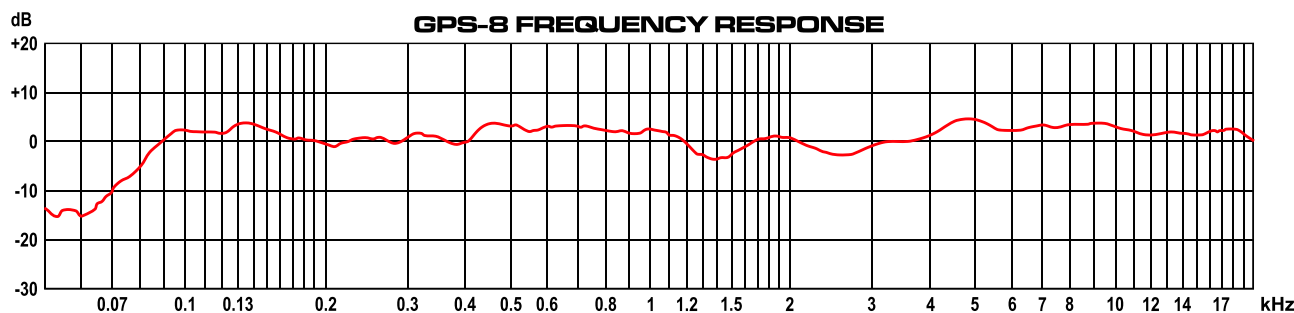

MAKERS OF THE ORIGINAL  
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 [www.galaxyaudio.com](http://www.galaxyaudio.com)

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada  
450.449.8177 FAX 450.449.8180

V20160419