


DTF-800 SERIES


Balanced Snake, XLR3F to DB25, 8 ch

Available in the following lengths:
3m(9.9 ft.), 4m(13.2 ft.), 5m(16.5 ft.), 7m(23.1 ft.).

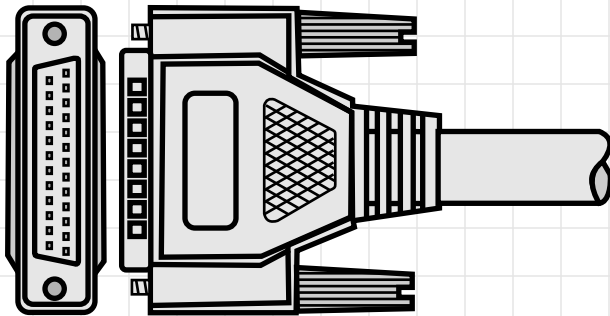


Pinout Diagram

NOTE: this view is from the "INSIDE" of the Multi-pin (D-Sub) connector. It depicts the view as seen from the solder terminals. The MALE pins are on the other side. This is essentially a "Mirror" view.

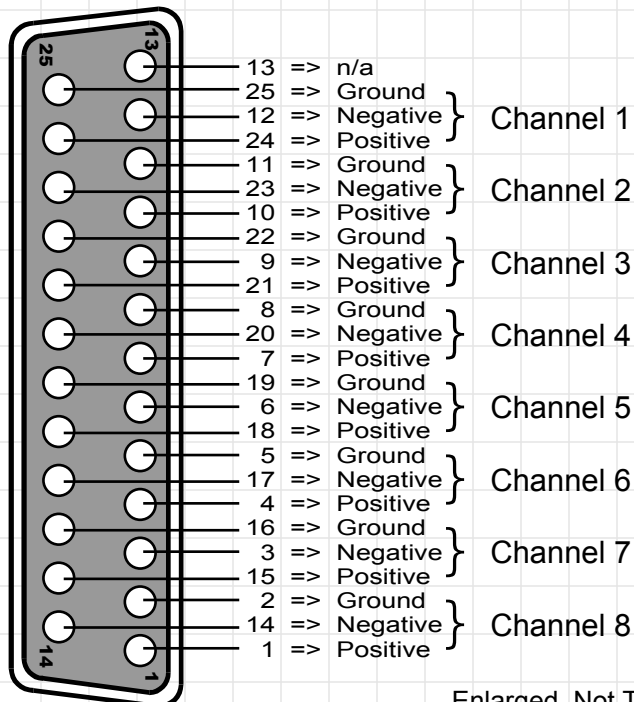

Enlarged, Not To Scale.

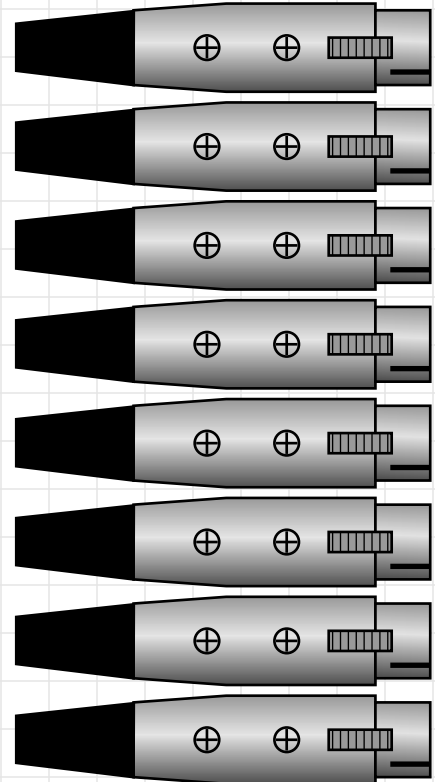

XLR PIN 1 = Ground
 XLR PIN 2 = Positive
 XLR PIN 3 = Negative

25-pin male plug (also called a "D-Sub") wired-out to 8 XLR Female connectors, for input connections from eight balanced sources to the D-88's multi-pin balanced inputs. inputs on audio mixers.

DTF-800 SERIES



HOSA TECHNOLOGY, 6650 CABALLERO BLVD., BUENA PARK, CA 90620
 PHONE: 714.522.8878 FAX: 714.522.4540