


PowerRAMP® Crossover Cable Protector

LEX
We Deliver the Power™

PowerRAMP®
Cable Protectors

ISO 9001:2008 Certified

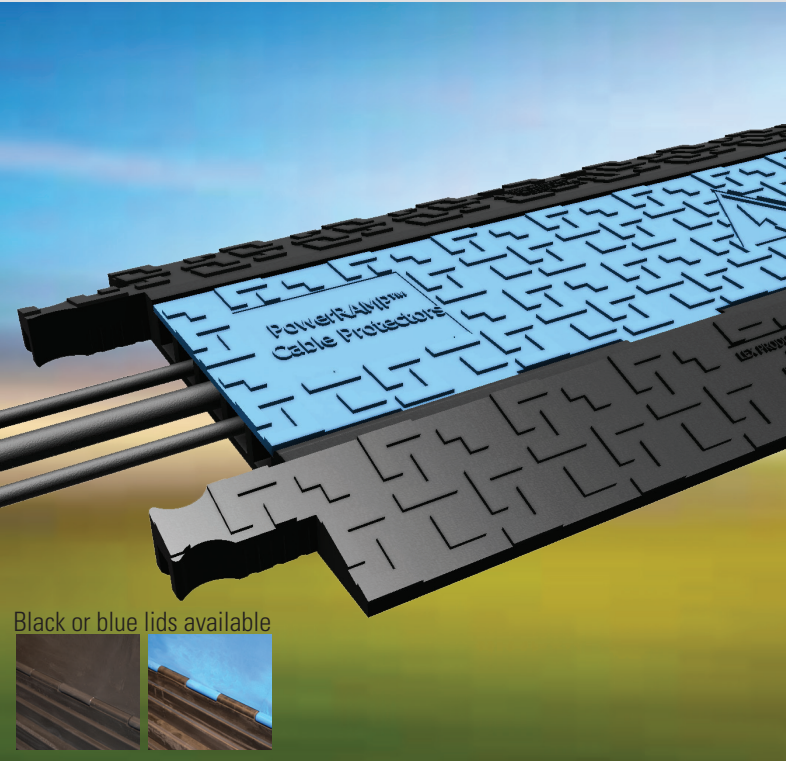

Black or blue lids available

Catalog Number:

PRC-5*

Description:

Heavy duty, 5-channel, modular cable protector with hinged lid and rugged industry standard connectors can be easily interconnected to protect cables of any length or mate with 45° left and right turn units and end boots to provide alternate configurations for design flexibility.

Typical Application:

Protects cables and hoses from damage when run across roads, parking lots, sidewalks and pathways, providing safe crossing for pedestrian and vehicle traffic.

Markets Served:

Commercial, Industrial, Military and Entertainment. Ideal for indoor and outdoor applications including entertainment venues, sporting events, convention centers, festivals, amusement parks, public events, construction sites, temporary power and disaster relief.

Features & Benefits:

- Heavy duty, non-conductive polyurethane construction provides safe crossing for pedestrians and vehicles while protecting electrical cables and hose lines
- Rugged industry standard connectors with exclusive “slip notch” friction release design provides easy mating and un-mating
- Mates with major cable protector brands and products
- 5-channel design can accommodate up to 1.25 inch diameter cables and hoses
- 1.625 inch wide center channel allows for up to #2 AWG 5-wire banded sets
- Exclusive tread design provides excellent traction
- Hinged lid provides easy access for insertion and removal of cables and hoses
- Made from UV stabilized material for prolonged use in direct sunlight
- High-visibility blue lid and black base
- Company name or logo can be molded into lid for easy identification

Specifications

Length	35.5 in./901.7 mm
Width	19.75 in./501.65 mm
Height	2 in./51 mm
Weight	27 lbs./12.2 kg
Slot Height	(5) 1.25 in./32 mm Channels
Slot Width	(4) 1.25 in./32 mm Channels (1) 1.625 in./41.3 mm Center Channel
Material	Base/Lid: Polyurethane Hinge Pin: Reinforced Fiberglass
Load Capacity Per Tire/Axle	16,300 lbs. Per Tire/32,600 lbs. Per Axle at 70° F
Safety Warning Symbols	Per ANSI Z535.3-2011-Molded in Lid
Operating Temperature	-40° F to 120° F -40° C to 48° C

* - Add “-BK” after catalog number for black lid and black base
Custom colors available. Consult your factory representative for details.

LEX
We Deliver the Power™

Lex Products Corporation
15 Progress Drive
Shelton CT 06484
203.363.3738
203.363.3742 Fax

Lex West
11847 Sheldon Street
Sun Valley, CA 91352
818.768.4474
818.768.4040 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

© Copyright Lex Products 2013

Produced in the United States of America
All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks
or registered trademarks of Lex Products in the United
States, other countries, or both.