

# Select Series

## Compact PDU with RackLink™

value oriented, intelligent outlet offering that is as versatile as your system and universally controlled

### features:

- Individual IP outlet control of 2 outlets
- Multiple IP autoping and recovery ensuring optimal system functionality
- Control start-up or shut-down with remote sequencing
- Easy set-up and control through RackLink user interface
- MOV surge and spike protection
- Automatic notification of connection status
- Seamlessly interfaces with 3rd party AV control systems and cloud platforms for scheduling, control, reporting and customization



RLNK-215



### specifications:

Select Series Compact Mount PDU with RackLink™ Series power management products shall be Middle Atlantic Products model # RLNK-\_15V (refer to chart). Select Series Compact Mount PDU with RackLink power products shall be 1.745"H x 4.77"W x 7.1"D (refer to drawing). Select Series Compact Mount PDU with RackLink shall have a 15 amp power capacity. Select Series Compact Mount PDU with RackLink shall provide MOV surge and spike protection. Select Series Compact Mount PDU with RackLink shall provide 2 total outlets which shall be individually controllable. Select Series Compact Mount PDU with RackLink shall provide sequencing. Select Series Compact Mount PDU with RackLink shall include a 2' power cord. Select Series Compact Mount PDU with RackLink shall monitor specific remote IP devices and services and shall automatically reboot an unresponsive network device and provide alerts via e-mail. Select Series Compact Mount PDU with RackLink shall allow local export of log files in CSV format, and shall allow log files to be extracted to 3rd party databases via IP. Select Series Compact Mount PDU with RackLink shall include an integrated web server for browser-based access and control. Select Series Compact Mount PDU with RackLink shall utilize an open-architecture serial communications protocol that is cloud compliant without being cloud dependent, and provide an API for seamless integration into any IP based architecture. Select Series Compact Mount PDU with RackLink shall be fully compliant with any control system or aggregator. Select Series Compact Mount PDU with RackLink shall be constructed of aluminum and steel with a black powdercoat finish. Select Series Compact Mount PDU with RackLink shall meet the EU RoHS Directive 2011/65/EU. Select Series Compact Mount PDU with RackLink shall be manufactured by an ISO 9001 and ISO 14001 registered company. Select Series Compact Mount PDU with RackLink shall be warrantied to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years. Select Series Compact Mount PDU with RackLink shall be listed to UL standard 60950-1 in US and to CAN/CSA C22.2 #60950-1 in Canada and FCC Part 15, Class B.

Customizable specification clips available at [middleatlantic.com](http://middleatlantic.com)



what **great systems** are built on.™

A brand of **legrand**



**Middle Atlantic Products**

[middleatlantic.com](http://middleatlantic.com) | [middleatlantic.ca](http://middleatlantic.ca)



96-01239 / rev b / 4-26-17

# Select Series


## Compact PDU with RackLink™

all dimensions in inches unless otherwise noted [all dimensions in brackets are in millimeters]

top view

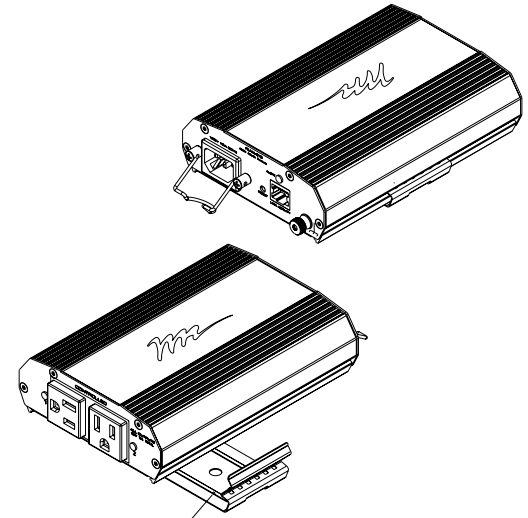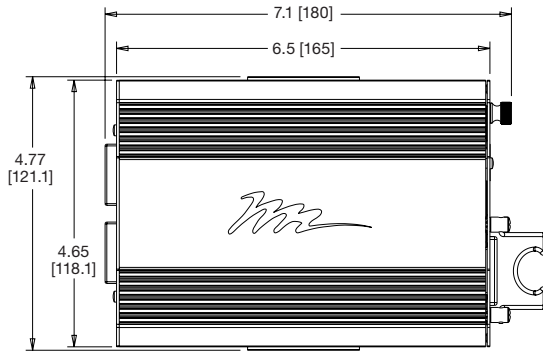


mounting bracket

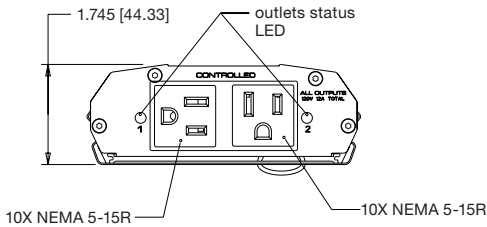


10X NEMA 5-15R

10X NEMA 5-15R

side view

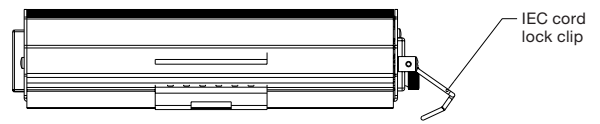

IEC cord lock clip

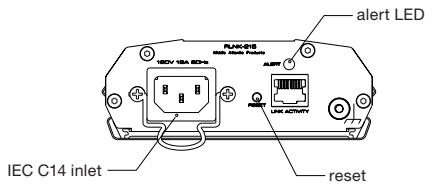

Notes:

1. All outputs 120V 12A total
2. RLNK-215 use cord, IEC, 5-15P, 125V, 2 Ft.

what **great systems** are built on.™

A brand of **legrand**



**Middle Atlantic Products**

middleatlantic.com | middleatlantic.ca

# Select Series

## Compact PDU with RackLink™

all dimensions in inches unless otherwise noted [all dimensions in brackets are in millimeters]

		RLNK-215
<b>SUMMARY</b>	Form Factor	In-Line Module
	Max Load	15A
	Rated Load	12A
	Surge Protection	basic
	Sequencing	yes
	# of Outlets	2 total / 2 controlled
	Integrated Web Server	yes
<b>AC POWER</b>	Connection Type	2 ft. IEC (15A)
	Line Voltage	Nominal: 120VAC / Minimum: 80VAC / Maximum: 140VAC
	Maximum Peak Load	15 Amps
	Maximum Cont.Load	12 Amps
	No Load Power Dissipation	Less Than 1W Note: Ethernet disconnected, all relays off
<b>BASIC SURGE SPECIFICATION</b>	Peak Impulse Current (8/20uS Waveform)	12,000 Amps, one time, 9,000 Amps, two times within 5 minutes - Maximum peak impulse current pulse as defined between line and neutral - Maximum multiple impulse current derated per spec
	Protection Mode	Line to Neutral only; no ground contamination
	Response Time	Less than 1 nanosecond
	Surge Energy Dissipation	120 Joules (10 / 100 micro seconds)
	EMI/RF Supression	>20dB Calculated Line to Neutral - 100kHz to 1Mhz - based on nominal impedance
<b>REGULATORY APPROVALS</b>	Safety	UL 60950-1 and CSA C22.2 No. 60950-1
	EMI/RF	FCC Part 15, Class B
<b>EVENT DRIVEN/ RESPONSES</b>	AutoPing No Response/Recovery	Email and/or Control Outlet
<b>GENERAL</b>	Operating Temperature Range	32 - 104°F (0-40°C)
	Humidity Range	0-95% RH, non-condensing
	Communication	SSL/TLS, SMTP, NTP, DDNS, Cloud, TCP/IP, HTTP (integrated web server)
	Warranty	3 years limited warranty

what **great systems** are built on.™

A brand of **legrand**



**Middle Atlantic Products**

middleatlantic.com | middleatlantic.ca