



Mounting Pattern Max Load 100 x 100, 200 x 100, 80lb LB/K or 200 x 200mm (36kg)

SMARTMOUNT. Pivoting Wall Mount FOR 22" TO 40" DISPLAYS

The SmartMount® Pivoting Wall Mount series offers the most versatile installation features and mounting options. Vertical adjustment ability allows for post installation leveling, making it easier than ever to find the perfect display position. With SP740P, extend the display up to 12.41" (315mm) or fully-retract it to just 3.03" (77mm) from the wall for an improved viewing angle. The display can now simply be installed by a single person with the Hookand-Hang[™] system. One-Touch[™] tilt technology offers +15°/-5° vertical tilt movement for the ideal viewing angle. Integrated cable management protects, contains and conceals cables for a clean installation.

- POST INSTALLATION HEIGHT ADJUSTMENT ±0.5" (13mm) of vertical adjustment fine tunes positioning of display after installation ONE-TOUCH™ TILT +15°/-5° vertical tilt movement for the ideal viewing angle EXTENDS UP TO 12.41" (315mm) Offers an improved viewing angle **FLEXIBLE MOUNTING** LOCATIONS Mounts to wood stud, concrete, cinder or breeze block INTEGRATED CABLE MANAGEMENT Protects, contains and conceals cables for a clean, professional installation
- Accommodates 100 x 100, 200 x 100, or 200 x 200mm VESA® mounting patterns
- Retracts to hold display just 3.03" (77mm) from the wall
- ±90° of pivot allows for perfect display positioning
- Easy leveling $\pm 5^{\circ}$ after display _ installation
- Quick and easy, Hook-and-Hang™ one-person installation
- Landscape or portrait mounting options increases display versatility
- Includes all necessary wall and display attachment hardware
- Design is UL listed and tested to four times stated load capacity





Integrated cable retract the display for an management keeps cords and cables out of the way.






Please visit peerless-av.com/en-us/patents for patent information.

Extend, turn, tilt, or improved viewing angle.

Comes in color packaging with included installation hardware and easy to follow instructions.



peerless-av.com



Model Numbers

WARRANTY: Limited 5-year

SP740P SmartMount® Pivoting Wall Mount for 22" to 40" Displays


Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SP740P	15.35" x 10.15" x 3.03"-12.41" (390 x 258 x 77-315mm)	5.40lb (2.45kg)	80lb (36kg)	Scratch Resistant Fused Epoxy	Semi-gloss black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE		
SP740P	20.50" x 4.19" x 12.00" (521 x 106 x 305mm)	6.2lb (2.8kg)	735029237341	Wall Mount, Wall and Display Installation Hardware, Installation Instructions	1		
Accessories Accessed Low Voltage Cable Plate Universal AV Component Mount AV Wall Shelves VSP700/WSP701: BA4-W: Easy Mount Recessed Low Voltage Cable Plate Recessed Low Voltage Media Plate with Duplex Surge Suppressor Metal Stud Wall Plates for 16"/24" Center Metal Studs							

All dimensions = inch (mm)

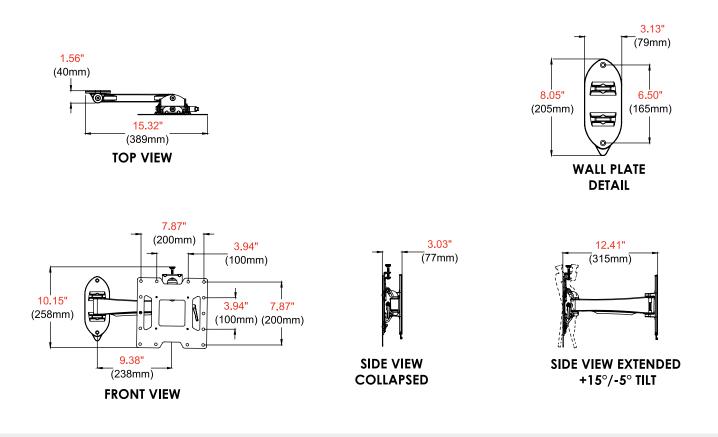

Architect Specifications

The SmartMount® Pivoting Wall Mount shall be a Peerless-AV model SP740P and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV 2300 White Oak Circle

Aurora, IL 60502 USA (800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV EMEA Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101

Peerless-AV Latin America Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66062 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

