


VBC-HRL

DC-Voltage Blocking Coupler

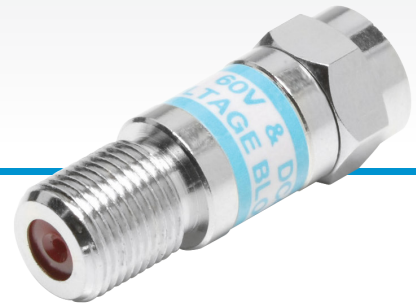

Features

- Used to stop voltage from entering a device
- Protects sensitive test equipment from damage test
- Two bandwidths available for use in CATV and Satellite applications
- Low insertion loss for transparent operation
- High return loss for unsurpassed performance in digital signal environments

Specification

	Bandwidth	Flatness	Insertion Loss	Return Loss
VBC-HRL	5 MHz to 3000 MHz	@ 1 GHz > 0.3 dB	@ 1 GHz < 0.1 dB	> 25 dB
		@ 2 GHz > 1.0 dB	@ 2 GHz < 0.3 dB	

Ordering Information

VBC-HRL 3 GHz DC-Voltage Blocking Coupler