

plura® PHB-3G Series

High Brightness 7" & 9" Outdoor Monitor Solutions

PHB-207-3G



PHB-207-3G

Features:

- Audio Level Meters
- Front & Back Tally LED
- Internal Stereo Speakers



PHB-207-3G (back)

AVAILABLE OPTIONS
ON NEXT PAGE:

3Gb/s

V-Mount
Battery
Adapter

Anton Bauer
Mount also an
option




PHB-209-3G

PHB-207DRK-3G

3Gb/s


Quadruple - 4" Inputs Display - 3Gb/s-ready

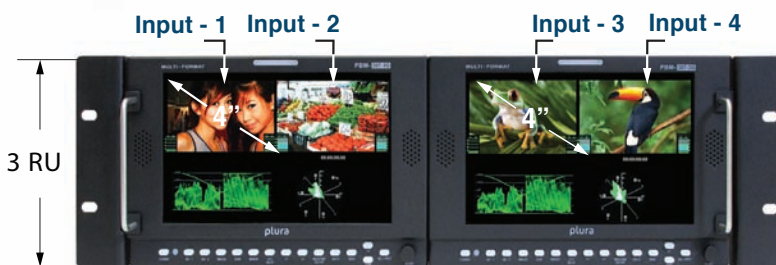

DISPLAY INPUT MODES: [4x4"] [2x4" + 1x7"] [2x7"]
4 x 3G Inputs & 4 x 3G loop through outputs

PHB-209DRK-3G

Quadruple - 5" Inputs Display - 3Gb/s-ready

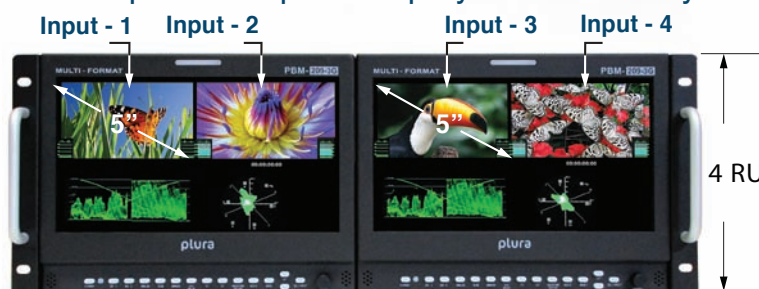

DISPLAY INPUT MODES: [4x5"] [2x5" + 1x9"] [2x9"]
4 x 3G Inputs & 4 x 3G loop through outputs

- ▶ 4 images with 2 waveform/vector display & 16CH audio metering for each input.
- ▶ 4 x 3G Inputs & 4 x 3G loop through outputs
- ▶ Closed caption capable (708/608) & OP47

www.PluraBroadcast.com

Phoenix • New York • Germany • Dubai • Seoul • Mexico City

PHB-3G Series Options



Hard Carry Case



with V-Mount



with Anton Bauer Mount

Rack Mount Options



(Dual Rack Mount or Single with Blank Plate)



Custom Hood Handle

Advanced Display Modes:



Waveform + Vector Scope Transparency
SDI-1, Waveform / Vectorscope, 16 CH Audio Level Meter & Time Code



Waveform + Vector Scope + VPID
SDI-1, Waveform / Vectorscope, 16 CH Audio Level Meter, VPID & Time Code



Advanced Waveform + VPID + Marker
SDI-1, Waveform, (Y,Cr,Cb), 16 CH Audio Level Meter, VPID & Marker



Dual 3 Gb/s Input Display Mode
SDI-1, SDI-2, Waveform / Vectorscope, 16 CH Audio Level Meter, VPID & Time Code

Key Features for: PHB-207-3G & PHB-209-3G

- ▶ Portable - 3G Ready!
- ▶ Dual Display Input Mode
- ▶ High Brightness over 1000 nit
- ▶ 178 degree viewing angle display
- ▶ Pixel to Pixel mode, Tally & DC operation
- ▶ Closed caption capable (708/608) & OP47
- ▶ 16 CH Audio Decoding, De-embedding & Level Metering and stereo speakers
- ▶ Display Advanced Waveform & Vector simultaneously with Line select

Key Features for: PHB-207DRK-3G & PHB-209DRK-3G

- ▶ 4 images with 2 waveform/vector display and 16CH audio metering for each input.
- ▶ 4 x 3G Inputs & 4 x 3G loop through outputs
- ▶ Other Inputs include: 6 x CCVS, 2 x S-Video, 2 x Component, 2 x HDMI, 2 x DVI
- ▶ Closed Caption (608-708)
- ▶ 16CH Audio Metering display per input
- ▶ Audio De-embedding
- ▶ 4 x speakers
- ▶ Waveform & Vector display & Line Select
- ▶ VPID Display (Video Payload Identification)
- ▶ 2 separate power inputs i.e. redundancy if one unit is down, you still have two other videos running.
- ▶ 2 separate power switches.
- ▶ You can display 2 or 4 images

Applications:

- ▶ Multiple Video Server Inputs monitoring
- ▶ Program & Preview monitoring
- ▶ Camera output & return feed side by side monitoring
- ▶ Multiple camera preview wall monitoring

Please note that the technical details shown here are provisional specifications (as of July 2016). The Information is subject to change without notice.

www.PluraBroadcast.com

Phoenix • New York • Germany • Dubai • Seoul • Mexico City

PHB-3G Specifications:

PHB-DRK-3G Specifications:

FUNCTION		PHB-207-3G	PHB-209-3G	PHB-207DRK-3G	PHB-209DRK-3G
INPUT	SDI Input	2EA, HD/SD Serial Digital , 3Gb/s, 1.485Gb/s, 270Mb/s, BNC Jack		4 EA, HD/SD Serial Digital , 3Gb/s, 1.485Gb/s, 270Mb/s, BNC Jack	
	Analog Input	3EA, Composite, Component(YPbPr/RGB), BNC Jack		6 EA, Composite, Component (YPbPr/RGB), BNC Jack	
	S-VIDEO Input	1EA,YC(S-Video), S-Jack		2 EA,YC (S-Video), S-Jack	
	DVI / VGA Input	1EA, DVI-I, 24pin, Female		2 EA, DVI-I, 24 pin, Female	
	HDMI	1EA, HDMI, 19pin Female		2 EA, HDMI, 19 pin Female	
OUTPUT	SDI Output	2EA, BNC, Active Through Output		4 EA, BNC, Active Through Output	
	Analog Loop Output	N.A.			
ANALOG INPUT FORMAT	Composite	1.0Vpp (with sync)			
	YC (S-Video)	1.0Vpp (Y with Sync) 0.286Vpp (C)			
	Component	1.0Vpp (Y with Sync) 0.7Vpp (Pb/Pr)			
	RGB	1.0Vpp (G with Sync), 0.7Vpp (R/B)			
	DVI - (Analog PC)	H Frequency Range : 22~82KHz, V Frequency Range : 55~90Hz,			
		Maximum Resolution : UXGA at 60Hz,			
	Maximum Pixel Rate : 162MHz - Separate Sync Support				
DIGITAL INPUT FORMAT	SMPTE 428.1M	2048 x 1080p (24/25)			
	SMPTE-425M(3G)	1920 x 1080p (50/60)			
	SMPTE-260M	1920 x 1035i (60/59.94)			
	SMPTE-292M	1920 x 1080i (50/59.94/60)			
		1920 x1080p (30Psf/25Psf/24Psf/30/25/24)			
	SMPTE 372M	Dual Link HD-SDI YPbPr (4:2:2) : 1080p (50/59.94/60)			
		Dual Link HD-SDI YpbPr/RGB (4:4:4)			
		1080p (30/29.97/25/24/23.98)			
		1080i (29.97/25/24/23.98)			
		720p (60/59.94/50)			
	SMPTE 296M	1280 x 720p (50/59.94/60)			
	SMPTE 259M/C	480i (59.94)			
		576i (50)			
	Component	640 X 480 up to 1920 X 1080p			
	HDMI	H Frequency Range : 22~82KHz, V Frequency Range : 55~90Hz,			
	DVI Digital	Maximum Resolution : UXGA at 60Hz ,			
		Maximum Pixel Rate : 162MHz			
	AUDIO INPUT	Input Line	Analog Stereo (RCA Jack)		
	SDI Audio Input	Embedded HD/SD-SDI Audio			
AUDIO OUTPUT	Speaker Output	Internal Speaker (Stereo) 2W+2W			
	Output Line	1EA, L/R Stereo pin jack			
	Ear-phone Output	1EA, L/R Stereo, 3.5mm pin jack			
	Output Signal	Input Line & De-embedded Audio, 1~16CH			
I/O PORT	GPI	RJ-45 8 pin (Programmable General Purpose Input)			
	RS422/485	RJ-45 8 pin for upgrade			
	Upgrade Port	D-sub 9 pin female for software upgrade			
	GPI	D-sub 9 pin female I/P for wall control			
LCD	Size	LCD 7"	LCD 9"	2 x LCD 7"	2 x LCD 9"
	Aspect Ratio	16:10	15:9	16:10	15:9
	Resolution	1280 x 800	1280 x 768	1280 x 800	1280 x 768
	Display Area H x V	151.95 x 95.40 mm	195.8 x 117.5 mm	2 x (151.95 x 95.40) mm	2 x (195.8 x 117.5) mm
	Display Color	16.7 M colors	16.7 M colors	16.7M colors	16.7M colors
	Brightness	1000-1300 cd/m2	1000 cd/m2	1000-1300 cd/m2	1000 cd/m2
	Contrast RATIO	800 : 1 (Typical)	1000 : 1 (Typical)	800 : 1 (Typical)	1000 : 1 (Typical)
	Response Time	Tr= 6 ms / Tf = Tr= 6 ms	Tr= 6 ms / Tf = Tr= 6 ms	Tr= 6 ms / Tf = Tr= 6 ms	Tr= 6 ms / Tf = Tr= 6 ms
	Viewing Angle (deg)	Horiz: 178 (Typ), Vert. 178 (Typ)	Horiz: 178 (Typ), Vert. 178 (Typ)	Horizontal: 178 (Typ.), Vertical 178 (Typ.)	Horizontal: 178 (Typ.), Vertical 178 (Typ.)
POWER REQUIREMENT		DC 12V/ 3.33A	DC 12V/ 3.33A	2 X DC 12V/ 3.33A	2 X DC 12V/ 3.33A
POWER CONSUMPTION		0.5A - 2.0A (24W)	0.5A - 2.0A (24W)	0.5A - 2.0A (24W)	0.5A - 2.0A (24W)
WORKING TEMPERATURE		-30° C ~ 40° C (-22° ~ 104° F)			
WORKING HUMIDITY		10% RH ~ 85% RH (Non Condensed)			
STORAGE TEMPERATURE		-30° C ~ 60° C (-22° ~ 140° F)			
STORAGE HUMIDITY		10% RH ~ 85% RH (Non Condensed)			
WEIGHT (w/o Stand & Packaging)		907 Kg- 2.0 lbs	1.587 Kg- 3.5 lbs	3.175 Kg- 7.0 lbs	3.175 Kg - 7.0 lbs
DIMENSION (WxHxD) (w/o Stand & Box)		210 x 132 x 54 mm	229 x 175 x 55.6 mm	482.6 x 146.05 x 52.07 mm	482.6 x 177.8 x 52.07 mm
		8.26 x 5.19 x 2.125 in	9.01 x 6.88 x 2.18 in	19 x 5.75 x 2.05 Inch	19 x 7.0 x 2.05 Inch
PACKAGING DIMENSION (WxHxD)		330 x 381 x 254 mm	330 x 381 x 254 mm	551.18 x 436.88 x 220.98 mm	551.18 x 436.88 x 220.98 mm
		13 x 15 x 10 Inch	13 x 15 x 10 Inch	21.7 x 17.2 x 8.7x Inch	21.7 x 17.2 x 8.7x Inch
ACCESSORY		Power Cord - Desk Stand	Power Cord - Desk Stand	2X Power Adapters & Power Cords	2X Power Adapters & Power Cords
		Hard Carry Case, V-Mount, Anton Bauer, Rackmount, Hood Handle		V-Mount, Anton Bauer	

Please note that the technical details shown here are provisional specifications (as of July 2016). The Information is subject to change without notice.