


SC-HS2 HDMI 1.3 to 3G-SDI Converter

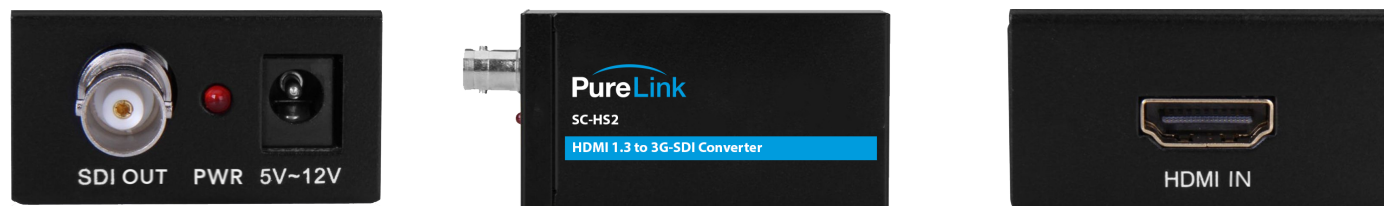

The **SC-HS2** provides HDMI to 3G-SDI conversion while boosting the signal quality and offering reliable transmission and features a 3 Gb/s serial link interface. The **SC-HS2** can support native resolutions up to 1080p@60Hz and provides lossless video and audio transmission.

Key Features

- Full HD 1080P input
- Supports SDI, HD-SDI, and 3G-SDI
- HDMI 1.3
- Small footprint, low power consumption
- High quality, lossless signal transport

Technical Specifications

INPUT SIGNAL TYPE(S)	(1) HDMI (Type A Female)
OUTPUT SIGNAL TYPE(S)	(1) 3G-SDI (BNC)
SUPPORTED RESOLUTIONS	480i, 576i 720P @ 50,59.94,60 1080i @ 50,59.94,60 1080P @ 23.98, 24, 25, 29.97, 30, 50, 59.94, 60
ESD PROTECTION	+/-8kV air-gap, and +/-4kV contact discharge
POWER ADAPTER	100-240VAC 50/60Hz, output 5vDC/1A CE/FCC/UL
POWER CONSUMPTION	2.5W
OPERATING TEMPERATURE	32°F – 104°F (0°C – 40°C)
STORAGE TEMPERATURE	-4°F – 140°F (-20°C – 60°C)
RELATIVE HUMIDITY	20 – 90% non condensing
PRODUCT DIMENSIONS	95mm x 60mm x 25mm
PRODUCT WEIGHT	260g

Warranty

WARRANTY Limited Warranty (3-Years)