

M 20X

DESKTOP DIGITAL MIXER

DESCRIPTION

M 20X is a fully recallable mixer, with 16 remote controlled preamps and 11 motorized faders. Despite its dimensions, the M 20X packs a whole suite of capabilities, such as high-profile preamplifiers, top of class DSP with studio-quality processing, WiFi remote control and a comprehensive set of multitrack recording and playback functions. The mixer offers a total of 20 analog inputs and 14 output channels, between the balanced analog outputs and the AES/EBU digital output.



FEATURES

- 20 analog inputs, 16 mic preamps and 4 line inputs
- 12 balanced outputs + phones
- 20-tracks sd card play/rec
- 24 x 24 CH USB Audio Interface (24-bit/48 kHz)
- 11 motorized Faders
- Smooth User Interface with 5" Touchscreen
- AES Digital Output
- LAN / WiFi Remote Control

TECHNICAL SPECIFICATIONS

Electronic specifications	Frequency Response:	20 Hz ÷ 20 kHz
	THD+N, 0dB gain, 0dBu out:	< 0.02% A-Weighted
	Dynamic Range, Analog to Analog:	109 dB A-Weighted
	Residual Noise Level, Main Out, Muted:	-85 dBu A-Weighted

Inputs	Channels:	20
	Mic (Balanced XLR):	8
	Remote Controlled Storable Gain:	Yes
	Gain Range:	0 dB ÷ 60 dB
	Mic Input Impedance:	3.3 kohm
	Maximum Input Level:	18 dBu
	Phantom Power +48V:	Yes
	Mic/Line (XLR/TRS combo):	8
	Remote Controlled Storable Gain:	Yes
	Gain Range:	0 dB ÷ 60 dB
	Mic Inputs Impedance (XLR):	3.3 kohm
	Line Inputs Impedance (TRS):	12.8 kohm
	Maximum Input Level (XLR):	18 dBu
	Maximum Input Level (TRS):	29 dBu
	Phantom Power +48V:	Yes
	Balanced Line (1/4" TRS):	2
	Gain Range:	-10 dB ÷ 10 dB
	Line Inputs Impedance (TRS):	18 kohm
	Maximum Input Level (TRS):	18 dBu
	Stereo Line (3,5mm jack):	1
Gain Range:	-10 dB ÷ 10 dB	
Line Inputs Impedance (TRS):	15 kohm	
Maximum Input Level (TRS):	18 dBu	
Input Connectors:	XLR, Jack	

Outputs	MIX Buses:	8
	MAIN OUT (Balanced XLR):	2
	Output Impedance:	50 ohm
	Maximum Output Level:	24 dBu
	MIX OUT (Balanced XLR):	8
	MIX OUT (1/4" TRS):	2
	Output Impedance:	150 ohm
	Maximum Output Level:	24 dBu
	PHONES (6,8mm jack Stereo Line):	1
	Output Impedance:	50 ohm
	Maximum Output Level:	18 dBu
	AES3 (XLR):	1
	Output Connectors:	XLR, Jack

Processing	Signal Processing:	32 Bit Floating Point
	A/D-D/A conversion:	24 Bit @ 48.0 kHz
	Headroom:	20 dB
	Buss:	16
Input processing	Source Selector:	Yes
	Polarity:	Yes
	High Pass Filter:	Yes
	Delay:	100 ms
	Gate:	with Gain Reduction meter
	PEQ:	4 Band
	Compressor / De-Esser on Inputs:	1 ÷ 16 (with Gain Reduction meter)
Output processing	Delay:	250 ms
	GEQ:	30 Band
	PEQ:	8 Band
	Compressor / Limiter:	with Gain Reduction meter
	MIX OUT:	[1 ÷ 8]
	Delay:	250 ms
	PEQ:	8 Band
	Compressor / Limiter:	with Gain Reduction meter
	Real Time Analyzer:	Yes
Delay:	250 ms	
Effects	Internal FX:	4
	FX1:	Reverb (Hall, Room, Plate, Ambience)
	FX2:	Reverb (Hall, Room, Plate, Ambience)
	FX3:	Delay (Stereo, Modern, Vintage, Dual, ER)
	FX4:	Modulation (Chorus, Flanger, Tremolo)
Multitrack	USB Audio Interface:	Yes
	Number of Tracks:	20
	A/D-D/A conversion:	24 Bit @ 48.0 kHz
	SD Multitrack Format:	WAV, 24Bit, 48.0kHz
	Recording:	20 Channels
	Playback:	20 Channels
	USB Audio:	Yes
	A/D-D/A conversion:	24 Bit @ 48.0 kHz
	USB Audio Interface Format:	WAV, 24Bit, 48.0kHz
	Upstream:	24 Channels
Downstream:	24 Channels	
USB drive play/rec	A/D-D/A conversion:	24 Bit @ 48.0 kHz
	USB Drive Recording:	2 Channels @ WAV, 24Bit, 48.0kHz
	A/D-D/A conversion:	16 Bit @ 44.1, 48.0, 88.2, 96.0 kHz
	USB Drive Playback:	2 Channels @ WAV/MP3/AIFF, 16Bit, 44.1, 48.0, 88.2, 96.0kHz



Control interfaces	LAN Port:	1000-BaseTX for remote control
	USB Ports:	2 Type A
	Description:	MIDI interface, WiFi dongle (must be en
Electrical specifications	Power supply:	Internal
	Voltage requirements:	100 V - 240 V
	Power consumption (MAX):	70 W
Physical specifications	Cabinet/Case Material:	Metal
Size	Height:	131 mm / 5.16 inches
	Width:	388 mm / 15.28 inches
	Depth:	428 mm / 16.85 inches
	Weight:	7.9 kg / 17.42 lbs
Shipping informations	Package Height:	215 mm / 8.46 inches
	Package Width:	580 mm / 22.83 inches
	Package Depth:	506 mm / 19.92 inches
	Package Weight:	9 kg / 19.84 lbs

PART NUMBER

- **17140122**

M 20X
 UK
 EAN 8024530017873

- **17140121**


M 20X
 JP
 EAN 8024530017866

- **17140120**

M 20X
 US
 EAN 8024530017859

- **17140093**

M 20X
 EU
 EAN 8024530016968

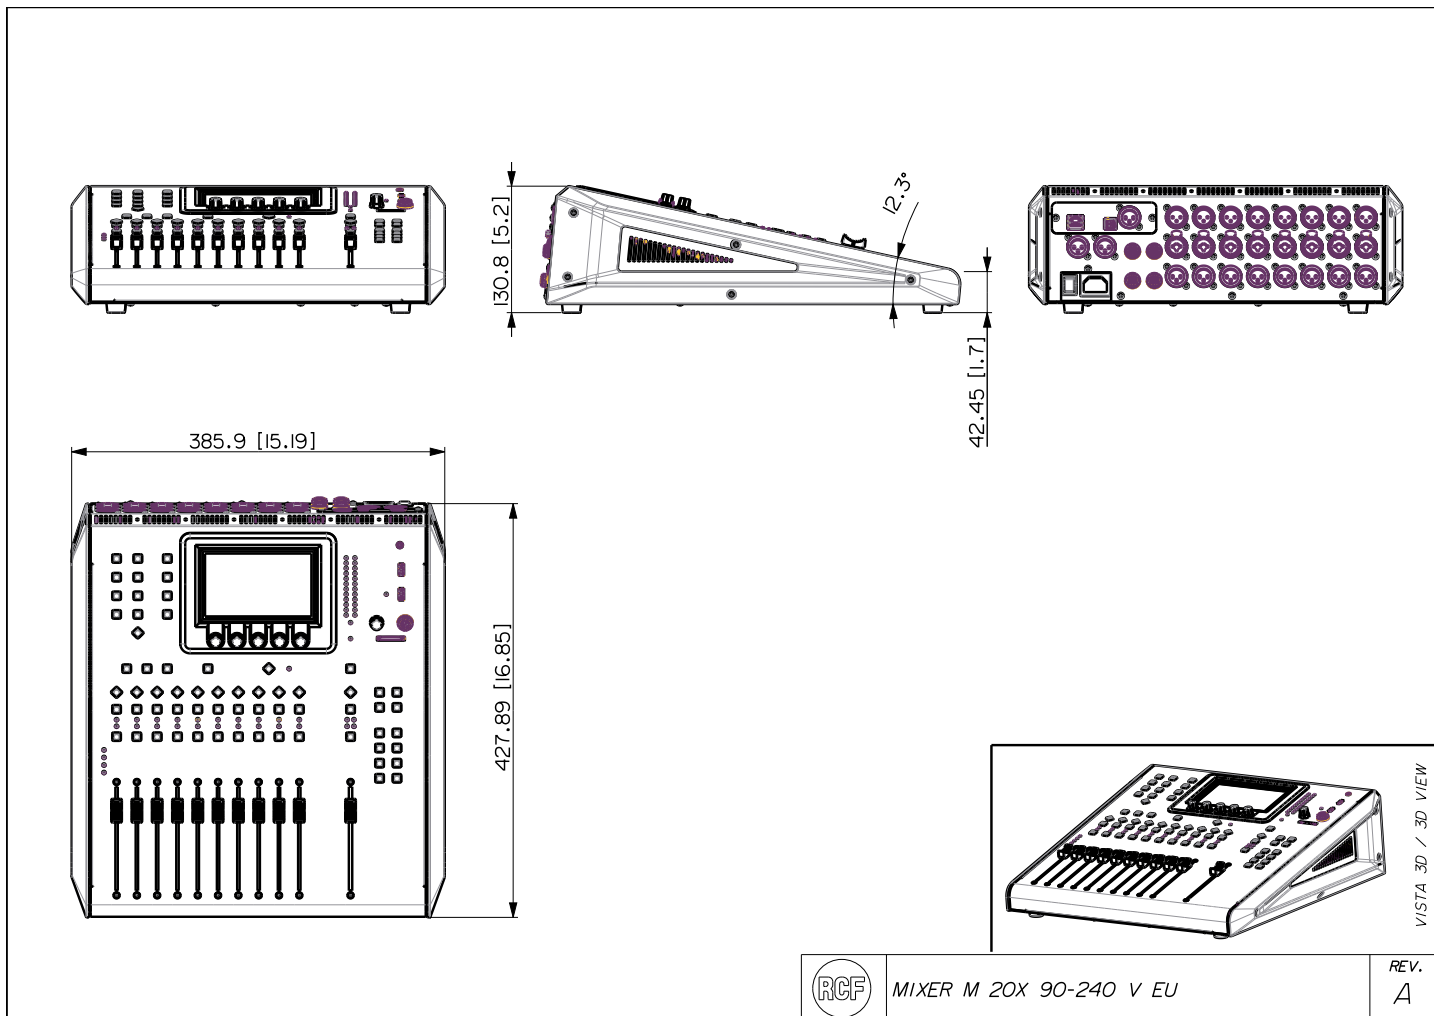

ACCESSORIES

ACCESSORY MWD1 WIRELESS USB ADAPTER

PART NUMBER **12399066**
EAN: 8024530019143

RACK MOUNT KIT RM-KIT M 20X / E12

PART NUMBER **13360450**
EAN: 8024530017743

TRANSPORTATION BAG BG M 20X - E 12

PART NUMBER **13360441**
EAN: 8024530016937