
Millenium Hybrid Broadcast Consoles



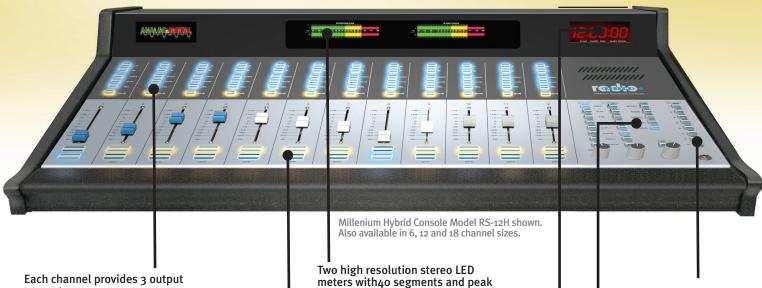

indicator.

Each channel provides 3 output buses (stereo Program, stereo Audition and a mono Telephone send), which can be selected simultaneously for simulcast and mix-minus applications. Inputs on each channel accommodate any combination of mic, line or consumer level inputs with extensive programmable logic states, also selectable by input. Patch points are also provided.

Channel on/off keypad switches are LED illuminated and they control channel audio as well as all logic and control states. Switching is via conductive rubber keypads rated for 1+ million operations.

Millenium Consoles include an accurate time-of-day clock and event timer which also slave to the Radio Systems' CT-2002 Master Clock System.

Every console model features a complete monitor section allowing studio monitors and headphones to select any program or cue source, as well as up to 4 remote monitor inputs.


This 8-position switcher is a standard console feature which can be be utilized to remote control any external device using the 8 closures and LED indicators provided, or as the control for the optional four source audio switcher or squawk box (intercom) selector card.

Our "Hybrid Analog&Digital" Consoles offer the best of both worlds with dependable analog circuitry plus dual digital outputs for Program and Audition buses and high-resolution LED metering.

Famous StudioHub+ connectivity on all inputs and outputs ensure fast plug-and-play installation.

Radio Systems' Millenium Hybrid Broadcast Consoles are a superb value. Thousands of RS Series Consoles have been sold since they were introduced 15 years ago, and today the Millenium Series carries on this tradition with enhanced capabilities and dramatic new styling. Take a hard look at Millenium broadcast consoles. They offer a dazzling combination of superb specifications, sleek modern styling and a wide range of features—all at unexpectedly low prices!



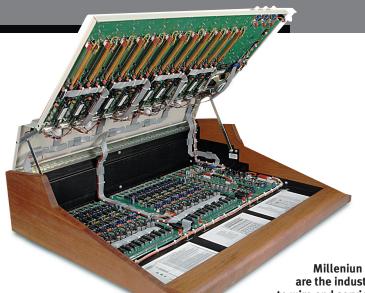



Rugged, stand-alone switching power supply provides fusing and LED indication for all power rails. 95 to 220VAC operation

Milleniun Consoles are the industry's easiest to wire and service. The unique open parts and wiring layout is due to total DC and VCA control.

StudioHub+ RJ-45 connectors for plugand-play wiring via standard CAT-5 cabling.



Specifications

Models available

RS-6H: 6 channel RS-12H: 12 channel RS-18H: 18 channel

Audio Inputs

Type: differentially balanced instrumentation amplifiers with gain set jumpers and selectable input attenuators Level: jumper selectable gain settings to accommodate nominal input levels from -60 dBm to +10 dBm. Maximum input level: +22 dBm Impedance: 20K ohms or jumper selected

Headroom: 22 dBm at any level RJ-45 "StudioHub+" Connectors

Analog Line Outputs

Type: actively balanced

Level: adjustable o dBm to +10 dBm, maximum

output +22 dBm Impedance: 100 ohms

Distortion: .008% at nominal operating level, 20 Hz to 20 kHz, Pgm, Aud and Mono outputs signal to noise: 88 dB (or better) below +4 dBm with o dBv input level, 20 kHz bandwidth, 600 ohm source impedance (line to line) 74 dB (or better) below +4 dBm output with -50 dBv input level, 20 kHz bandwidth, 150 ohm source impedance (mic to line) Frequency response:

+/- .2 dB 20 Hz to 20 kHz RJ-45 "StudioHub+" Connectors

Digital Line Outputs

Signal Format: AES-3 Signal Compliance: 24 bit

Output Sample Rate: 48 kHz /44.1 kHz / 32 kHz -

Crystal Selected

Digital Reference: Crystal (internal) Conversions: A/D 24-bit, Delta-Sigma,

256x oversampling

RJ-45 "StudioHub+" Connectors

Monitor Sends

Level: 1 volt rms nominal, 10 volts rms maximum, balanced

RJ-45 "StudioHub+" Connectors

Headphone Output

Level: 1 volt rms nominal, 10 volts rms maximum into 600 ohm headphone

Distortion: .05% typical, .1% maximum

Impedance: 50 ohms to front panel jack, 330 ohms to prefader (external amp) output

Cue Output

2 watts rms into 8 ohm speaker

Dimensions

All consoles are 27 inches deep and 9 inches tall

6 channel: 20.75 inches long 12 channel: 32.75 inches long 18 channel: 44.75 inches long

Available Options

Selector logic card Enhanced remote interface card Intercom Card

Four source switcher card DA Mixer Four output mix-minus boards IFB switcher Colored fader knobs

Available Accessories

Copy stand StudioHub+ Harness Source cables - specify type Spare power supply Auxiliary relay

Warranty

2 years parts and service Specifications subject to change without notice

