



evolution wireless G4 SK 300 G4-RC | Bodypack Transmitter



FEATURES

- Robust bodypack transmitter for use with any Sennheiser headmic or lavalier microphone (HEADMIC 1, ME 2 recommended)
- Easy to use, fast setup time
- Integrated network port allows control, monitoring and setup via Sennheiser Control Cockpit and WSM Software
- Broad range of products and existing accessories (such as microphones) allows usage in any kind of environment
- Up to 88 MHz bandwidth, up to 32 channels
- Increased RF output power (10/30/50 mW)
- Transmission Range: up to 100 meters / 330 feet
- Compatible with wireless speaker system LSP 500 PRO
- RC (remote control) switch available for the bodypack transmitter

Robust bodypack transmitter with increased bandwidth and transmission power for evolution wireless G4 300 Series systems, delivering exceptional speech intelligibility in Business and Education.

DELIVERY INCLUDES

- SK 300 G4-RC bodypack transmitter
- 2 AA batteries
- pouch
- quick guide
- safety guide
- manufacturer declaration sheet

ACCESSORIES

RMS 1	Remote mute switch	Art. no. 503164
BA 2015	rechargeable battery	Art. no. 009950
L 2015	charger	Art. no. 009828
CL 2	microphone cable	Art. no. 004840

PRODUCT VARIANTS

Made in Germany

SK 300 G4-RC-K+	925 - 937.5 MHz	Art. no. 507719
SK 300 G4-RC-GBw	606 - 678 MHz	Art. no. 507720
SK 300 G4-RC-Gw	558 - 626 MHz	Art. no. 507721
SK 300 G4-RC-Bw	626 - 698 MHz	Art. no. 507722
SK 300 G4-RC-Cw	718 - 790 MHz	Art. no. 507723
SK 300 G4-RC-Dw	790 - 865 MHz	Art. no. 507724
SK 300 G4-RC-Aw+	470 - 558 MHz	Art. no. 508406

Assembled in USA

SK 300 G4-RC-AS	520 - 558 MHz	Art. no. 508059
SK 300 G4-RC-JB	806 - 810 MHz	Art. no. 508060
SK 300 G4-RC-Gw	558 - 626 MHz	Art. no. 508061
SK 300 G4-RC-Bw	626 - 698 MHz	Art. no. 508062
SK 300 G4-RC-Cw	718 - 790 MHz	Art. no. 508063
SK 300 G4-RC-Dw	790 - 865 MHz	Art. no. 508064
SK 300 G4-RC-Aw+	470 - 558 MHz	Art. no. 508427
SK 300 G4-RC-Gw1	558 - 608 MHz	Art. no. 508448



evolution wireless G4

SK 300 G4-RC | Bodypack Transmitter

SPECIFICATIONS


RF characteristics		AF characteristics	
Modulation	Wideband FM	Compander system	Sennheiser HDX
Frequency ranges	Aw+: 470 - 558 MHz AS: 520 - 558 MHz Gw1: 558 - 608 MHz Gw: 558 - 626 MHz GBw: 606 - 678 MHz Bw: 526 - 698 MHz Cw: 718 - 790 MHz Dw: 790 - 865 MHz JB: 806 - 810 MHz K+: 925 - 937.5 MHz	AF frequency response	Mic: 80 - 18,000 Hz Line: 25 - 18,000 Hz
Transmission frequencies	Max. 3520 frequencies, adjustable in 25 kHz steps 20 frequency banks, each with up to 32 factory-pre-set channels, no intermodulation 6 frequency banks with up to 32 programmable channels	Signal-to-noise ratio (1 mV, peak deviation)	≥ 115 dBA
Switching bandwidth	up to 88 MHz	Total harmonic distortion (THD)	≤ 0.9 %
Nominal/peak deviation	± 24 kHz / ± 48 kHz	Max. microphone/line input voltage	3 V _{eff}
Frequency stability	$\leq \pm 15$ ppm	Microphone/line input impedance	40 k Ω , unbalanced / 1 M Ω
RF output power at 50 Ω	switchable: Low: typ. 10 mW Standard: typ. 30 mW High: typ. 50 mW	Input capacitance	Switchable
Pilot tone squelch	Can be switched off	Setting range for input sensitivity	60 dB, adjustable in 3 dB steps
Overall device			
Temperature range		-10 °C to +55 °C	
Power supply		2 AA batteries, 1.5 V or BA 2015 accupack	
Nominal voltage		3 V battery / 2.4 V rechargeable battery	
Current consumption		at nominal voltage: typ. 180 mA with transmitter switched off: ≤ 25 μ A	
Operating time		Typically 8 h	
Dimensions		Approx. 82 x 64 x 24 mm	
Weight (incl. batteries)		approx. 160 g	



evolution wireless G4

SK 300 G4-RC | Bodypack Transmitter

DIMENSIONS

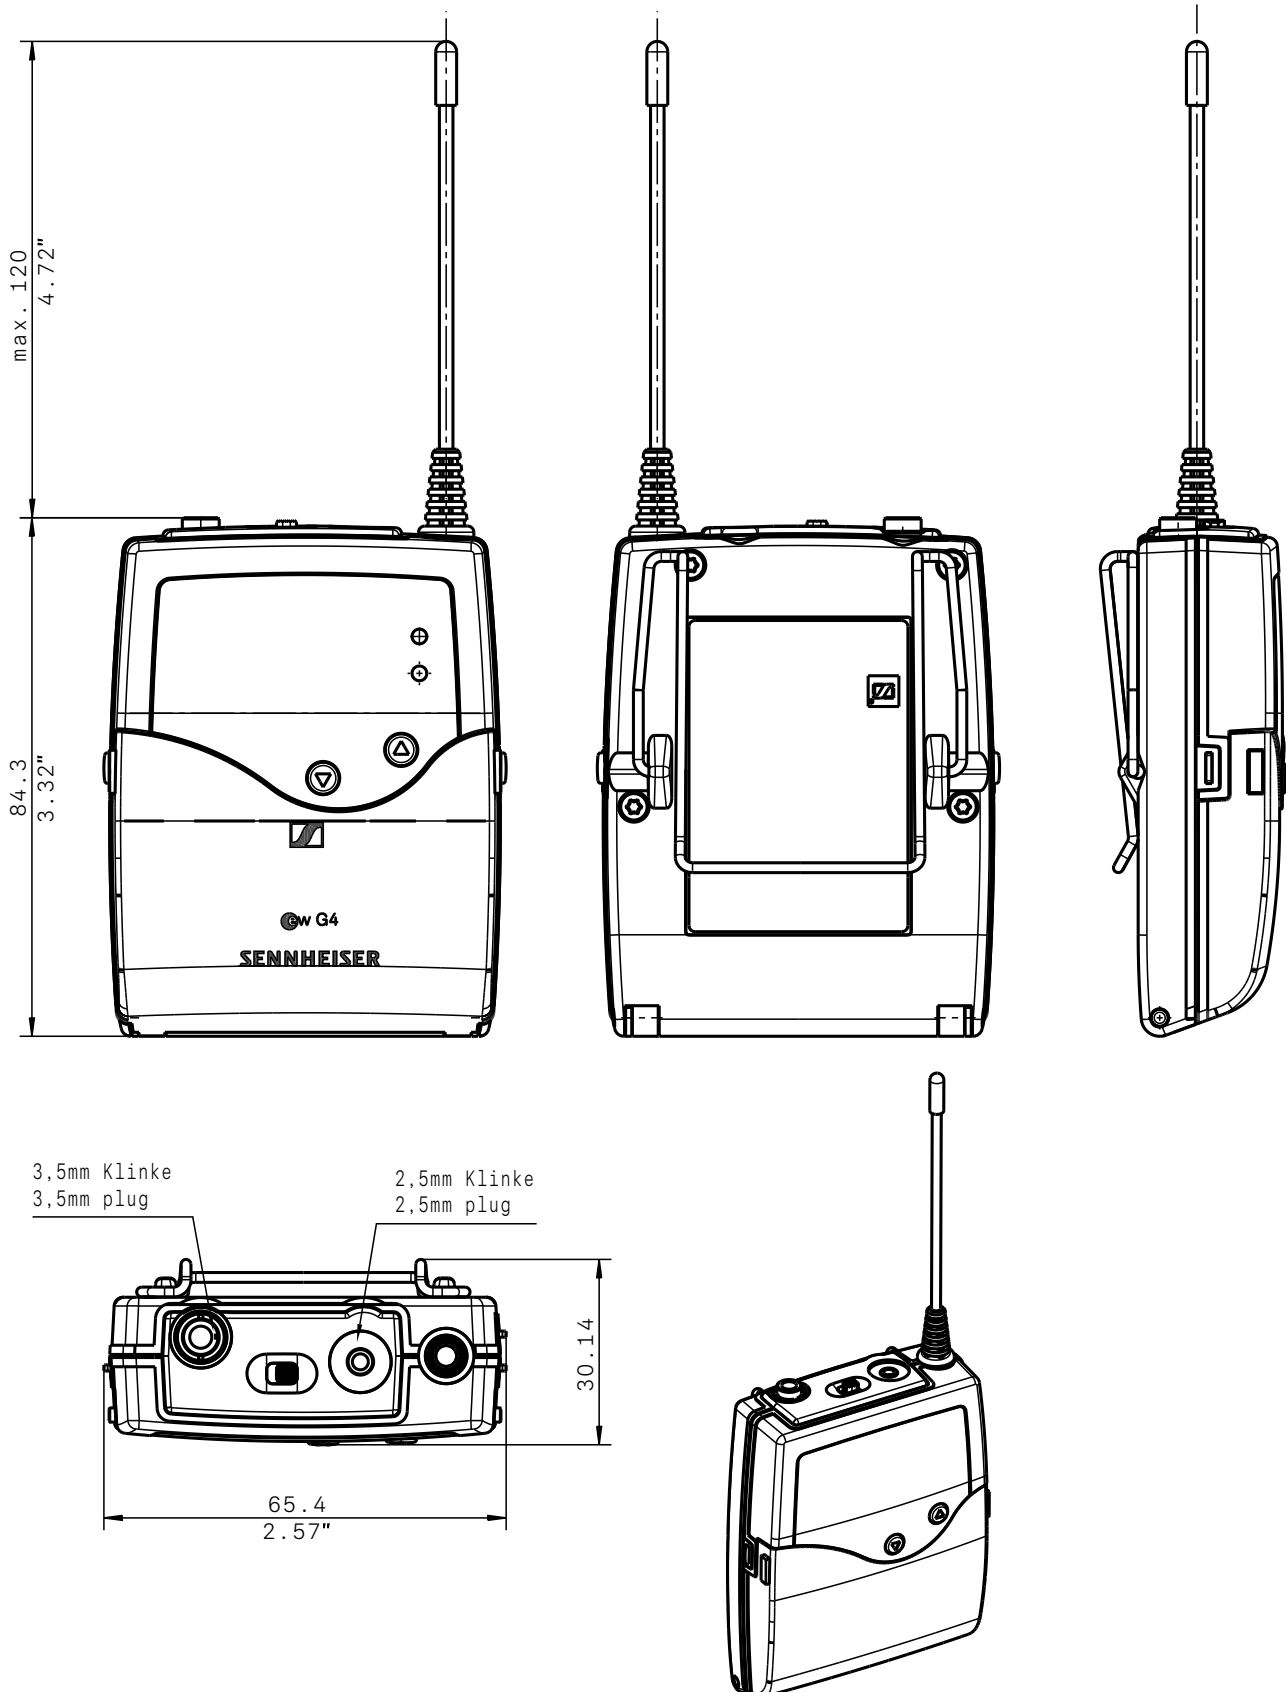



evolution wireless G4

SK 300 G4-RC | Bodypack Transmitter

ARCHITECT'S SPECIFICATION

The compact bodypack transmitter shall be for use with a companion receiver as part of a wireless RF transmission system.

The bodypack transmitter shall operate within ten UHF frequency ranges, with a switching bandwidth of up to 88 MHz: 470 – 558 MHz, 520 – 558 MHz, 558 – 608 MHz, 558 – 626 MHz, 606 – 678 MHz, 626 – 698 MHz, 718 – 790 MHz, 790 – 865 MHz, 806 – 810 MHz, 925 – 937.5 MHz; transmission frequencies shall be 3520 per range and shall be tunable in 25 kHz steps. The bodypack transmitter shall feature 20 fixed frequency banks with up to 32 compatible frequency presets and 6 user banks with up to 32 user programmable frequencies.

The bodypack transmitter shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of AF level, transmission status, lock status, pilot tone transmission, muting function, and battery status. An auto-lock feature shall be provided to prevent settings from being accidentally altered.

The bodypack transmitter parameters shall either be configurable in the associated receiver's menu and synchronized with the bodypack transmitter via an integrated infrared interface or shall be programmable in the bodypack transmitter menu.

The bodypack transmitter shall be equipped with a mute switch, which shall be switchable between "AF on/off", "RF on/off" and "Disabled" via the receiver's user interface. A 2.5 mm jack socket shall be provided for connecting a Sennheiser RMS 1 external mute switch. The settings for the external mute switch shall be switchable between "AF on/off", "RF on/off", "Push to mute" and "Push to talk" via the user interface.

Nominal/peak deviation shall be ± 24 kHz/ ± 48 kHz. Frequency stability shall be $\leq \pm 15$ ppm. RF output power at 50 Ω shall be switchable between 10 mW (typical, low) and 30 mW (typical, standard) and 50 mW (typical, high).

The bodypack transmitter shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Audio frequency response shall range from 80 – 18,000 Hz (microphone) or 25 – 18,000 Hz (line). Signal-to-noise ratio at 1 mV and peak deviation shall be ≥ 115 dBA. Total harmonic distortion (THD) shall be ≤ 0.9 %. Input sensitivity shall be adjustable within a 60 dB range in steps of 3 dB.

Power shall be supplied to the bodypack transmitter by two 1.5V AA size batteries or by one Sennheiser BA 2015 rechargeable accupack. Nominal voltage shall be 2.4 V, current consumption shall be typical 180 mA at nominal voltage; ≤ 25 μ A when bodypack transmitter is switched off. Operating time shall be typical 8 hours. The bodypack transmitter shall have a rugged metal housing; dimensions shall be approximately 82 x 64 x 24 mm (3.23" x 2.52" x 0.94"). Weight including the batteries shall be approximately 160 grams (5.64 oz). Operating temperature shall range from -10 °C to $+55$ °C ($+14$ °F to $+131$ °F).

The bodypack transmitter shall be the Sennheiser SK 300 G4-RC.