

# FDX-3000

Multimode  
Fiber Extender



## For the Extension of any USB Keyboard and Mouse, Stereo Audio, DVI-D and RS-232 Signal up to 1,400 Feet

The FDX-3000 consists of a transmitter and receiver that extend KVM, DVI-D, audio and RS-232 signals. It is a professional quality KVM capable of extending signals up to 1,400 feet over a single multimode fiber optic cable.

### Features

- Top Signal Quality at Maximum Extension Over Multimode Fiber (1,400 ft.)
- Superior Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 at 60Hz (or 1280 x 1024 at 75Hz)
- Customizable/Programmable DDC Table
- Supports USB Keyboard/Mouse
- Supports Stereo Audio
- Supports DVI-D
- Supports RS-232 extension up to 115,200 bps
- Supports all USB Keyboards Fully Transparent
- Fiber Plug Type LC
- Compatible With all Operating Systems
- Compatible With all Major KVM Switches
- Compact Metal Casing

### Why Fiber Optic?

SmartAVI has created a full line of fiber optic extender products, understanding that this technology is superior to traditional cabling.

Fiber optic cables are:

- capable of transmitting over very long distances with no signal loss.
- immune to electromagnetic interference. In situations where there is considerable interference, fiber optic cabling is the only solution.
- much more secure because they cannot be easily tapped. For this reason, military and law enforcement agencies use fiber optic cables for the transmission of sensitive data.
- relatively inexpensive and small enough to be routed through small spaces.




Made in the USA

**SmartAVI**  
SMART AUDIO VIDEO INNOVATION

[www.smartavi.com](http://www.smartavi.com)

# FDX-3000

## Multimode Fiber Extender

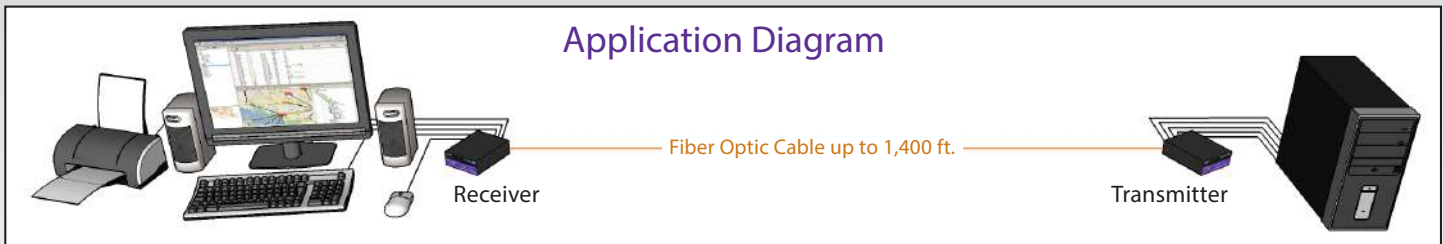

### Specifications

Video	
Input Interface	DVI-D Female (Single-Link)
Resolution	1920x1200 at 60Hz
DDC	Internal Table can be Re-programmed
Audio	
Signal Type	Stereo Audio
Bandwidth	15MHz, 0dB
Impedance	10K Ohm
Connector	3.5mm Stereo Mini Female
Other	
RS-232	Data up to 115,200bps
USB	USB Keyboard and Mouse Compliant
Fiber Extender	Fiber <ul style="list-style-type: none"><li>• 225m @ Multimode 62,5μ</li><li>• 450m @ Multimode 50μ</li></ul> Fiber-Plug type LC
Dimensions	4.5"W X 6"D X 2"H
Weight	1lbs (TX +RX)

### Applications

- Corporate or Educational Presentations
- Financial (Remote Servers/User Control)
- Call Centers
- Industrial (Long-Range Workstation Isolation)
- Information Terminals/Kiosks
- Airport Installations (Air Traffic Control/Passenger Information)
- KVM Extension where Exceptional Quality of Signal is Crucial
- Medical (Remote Operation Away from Sensitive/Magnetic Equipment)
- Recording (for Large Studios where Editing/Mixing Stations are Compact and/or Require Complete Silence)

FDX-3000 Receiver Front



FDX-3000 Receiver Rear



### Ordering Information

Part No.	Qty.	Description
FDX-TX3000	1	FDX-3000 Multimode Transmitter
FDX-RX3000	1	FDX-3000 Multimode Receiver
PS5V4A	2	Power Supply (5V, 4A)



SmartAVI, Inc. / Twitter: smartavi

11651 Vanowen Street., North Hollywood, CA 91605

Toll Free: (800) 284-2131 Local: (818) 503-6200

www.SmartAVI.com

**SmartAVI**  
SMART AUDIO VIDEO INNOVATION



Made in the USA

www.smartavi.com