


# SDHN-2D-P

**Secure 2-port, Dual-head DP-to-HDMI KVM switch  
with dedicated CAC port & 4K Ultra-HD support.**

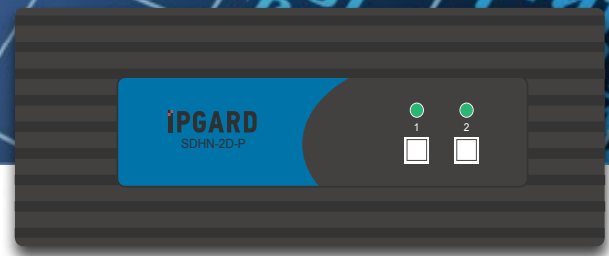

## KEY FEATURES

- Supports Windows, Mac and Linux OS
- Dual-head DP-to-HDMI video interface
- 4K Ultra-HD resolution - supports up to 3840 x 2160 @ 30Hz
- Supports balanced speakers output and switching
- Advanced configurable CAC port
- Front panel tactile buttons with LED indicator
- External power supply - Level VI efficiency

## SECURITY FEATURES

- Non-reprogrammable ROM
- Active Anti-tamper switches
- Long-life internal Anti-tampering battery
- External tamper-evident seals
- Keyboard, Mouse and Video emulation
- Absolute isolation - No data leakage between ports
- Certified by NIAP, the latest Common Criteria (Protection Profile for Peripheral Sharing Switch Version 3.0)

## APPLICATIONS

- Government Operations
- Defense Applications
- Secure Control Rooms
- Corporate Communications
- Server Operations
- Educational Administrations
- Medical Facilities
- Banking Network
- Insurance Data Centers
- Transit Management
- Industrial Operation
- Intelligence Communications



## WHY SECURE KVM?

Traditional non-secure KVM switches offer centralized control of multiple computers, but offer no absolute isolation between them. This exposes systems to the possibility of malicious damage and disruption, and acquisition of sensitive data from one computer to another.

IPGard's Secure KVM Switch is designed for use in secure defense and intelligence applications where sensitive data must be protected. The Switch is NIAP PP 3.0 certified and equipped with the highest security features that meet today's Information Assurance safe control standards. The switch prevents data leakage between computers that can run at different security levels, and eliminate any potential cyber threat.



## KEYBOARD AND MOUSE EMULATION

The Secure KVM emulates (simulates) the presence of a keyboard and mouse for every attached computer through a USB cable. Both selected and non-selected computers maintain a constant connection with the unit's keyboard-mouse emulation controllers, allowing for ultra-fast switching and restricting discovery of newly connected peripherals during switching operations. Emulation of keyboard and mouse also prevents direct connection between the peripherals and the connected computers, shielding systems from potential vulnerabilities.



## ULTRA-SECURE KVM SWITCHING

The SDHN-2D-P allows users to control KVM (Keyboard, Video and Mouse) operation of up to two computers with HDMI monitors. It features mechanical, electrical and optical signal isolation to prevent hacking and data leakage in environments where security is paramount.


With the SDHN-2D-P, all data relays are controlled by inverted signals, shielding connections from outside intrusion by forcing them each to work one at a time. Each port uses its own isolated data channel and each unit features non-reprogrammable ROM to better protect the switch's functions. Better yet, the SDHN-2D-P offers the highest security when accessing classified and public networks over the internet through these isolated connections. By isolating connections between networks, the SDHN-2D-P ensures no data is leaked between secure ports and the outside world.

The SDHN-2D-P has clearly marked front-panel buttons for controlling the device, so securely switching between sources is always simple. For high-grade secure switching made easy, look no further than the SDHN-2D-P.



## CAC SUPPORT

Many secure KVM switches support CAC devices, such as smart-card and biometric readers, bolstering security when using the device. However, IPGard takes CAC security even further, allowing users to assign specific peripheral devices to the SDHN-2D-P's CAC port. Once a peripheral device has been registered by an authenticated admin, users can then switch the connection between that device and the PC's along with KVM switching.



## SECURE EDID LEARN AND VIDEO EMULATION

The SDHN-2D-P simulates a generic EDID as default, allowing it to operate most of the connected monitors. Both selected and non-selected computers maintain a constant connection with the unit's video emulation controllers, allowing for ultra-fast switching and restricting discovery of newly connected monitors during switching operations. Upon activating the KVM, the unit will quickly and automatically learn new EDID for specific monitors. The unit then prevents unwanted and unsecure data from getting transmitted through DDC lines by means of secure EDID learning and emulation.

SDHN-2D-P Front




SDHN-2D-P Back



## INSTALLATION DIAGRAM

**iPGARD**  
SDHN-2D-P

- |             |           |           |
|-------------|-----------|-----------|
| — DP IN     | — USB IN  | — CAC IN  |
| — AUDIO OUT | — USB OUT | — CAC OUT |
| — HDMI OUT  |           |           |

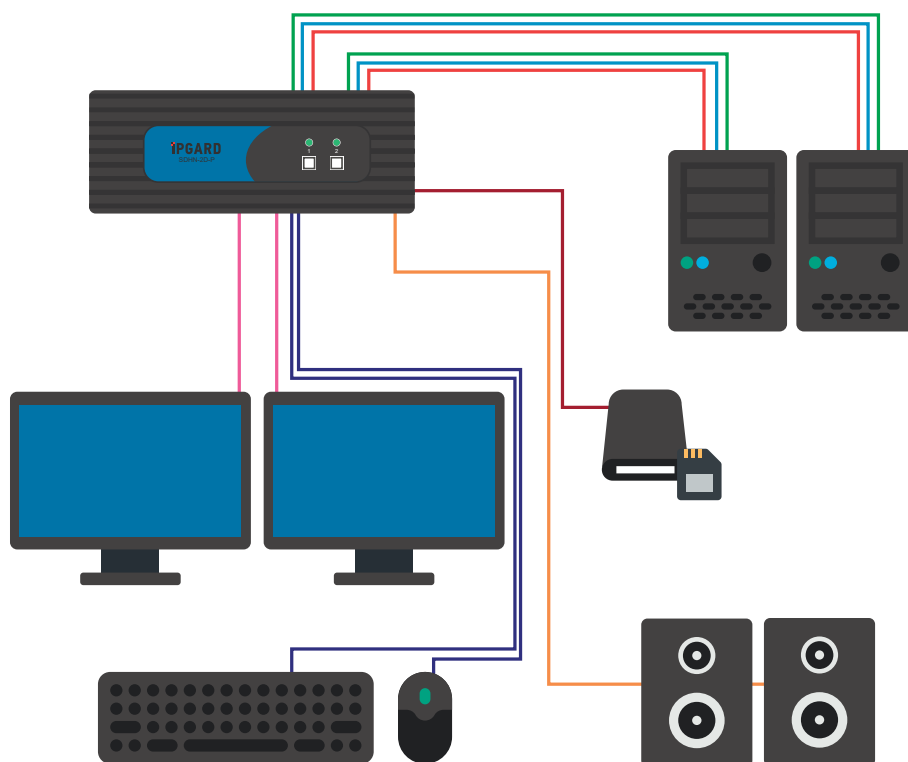

## SPECIFICATIONS

| VIDEO               |                                   |
|---------------------|-----------------------------------|
| Format              | DP, HDMI                          |
| Input Interface     | (4) DP 20-pin female              |
| Output Interface    | (2) HDMI 19-pin female            |
| Resolution          | Up to 4K (3840x2160 @30Hz)        |
| DDC                 | 5 volts p-p (TTL)                 |
| Input Equalization  | Automatic                         |
| Input Cable Length  | Up to 20 ft.                      |
| Output Cable Length | Up to 20 ft.                      |
| USB                 |                                   |
| Input Interface     | (4) USB Type B                    |
| Output Interface    | (2) USB 1.1 Type A for KM Devices |
| Emulation           | Keyboard and Mouse                |
| CAC                 | Configurable CAC port             |

| AUDIO           |                                     |
|-----------------|-------------------------------------|
| Audio Input     | (2) 3.5mm stereo audio              |
| Audio Output    | (1) 3.5mm stereo audio              |
| CONTROL         |                                     |
| Front Panel     | Front panel SELECT buttons          |
| OTHER           |                                     |
| Power           | External 100-240 VAC/ 12VDC2A @ 24W |
| Dimensions      | 8.8" W x 2.63" H x 6.69" D          |
| Weight          | 3.85 lbs                            |
| Approvals       | NIAP PP 3.0, UL, CE, ROHS Compliant |
| Operating Temp. | +32 to +104°F (0 to +40°C)          |
| Storage Temp.   | -4 to 140°F (-20 to +60°C)          |
| Humidity        | Up to 80% (no condensation)         |

| ORDERING INFORMATION |              |                                                                                                    |
|----------------------|--------------|----------------------------------------------------------------------------------------------------|
| Part No.             | UPC          | Description                                                                                        |
| SDHN-2D-P            | 686911122286 | 2-Port DH Secure Pro DP to HDMI KVM w/ audio and CAC, PP 3.0<br>Includes: [1872-IPG-1010; PS12V2A] |

## CONTACT US

 **iPGARD™**

CALL US TOLL FREE:

(702) 485-4775

(888) 99-iPGARD

(702) 990-0523

[info@iPGARD.com](mailto:info@iPGARD.com)