


Product Spec Sheet
Linear PCM Recorder for DSLR
DR-701D

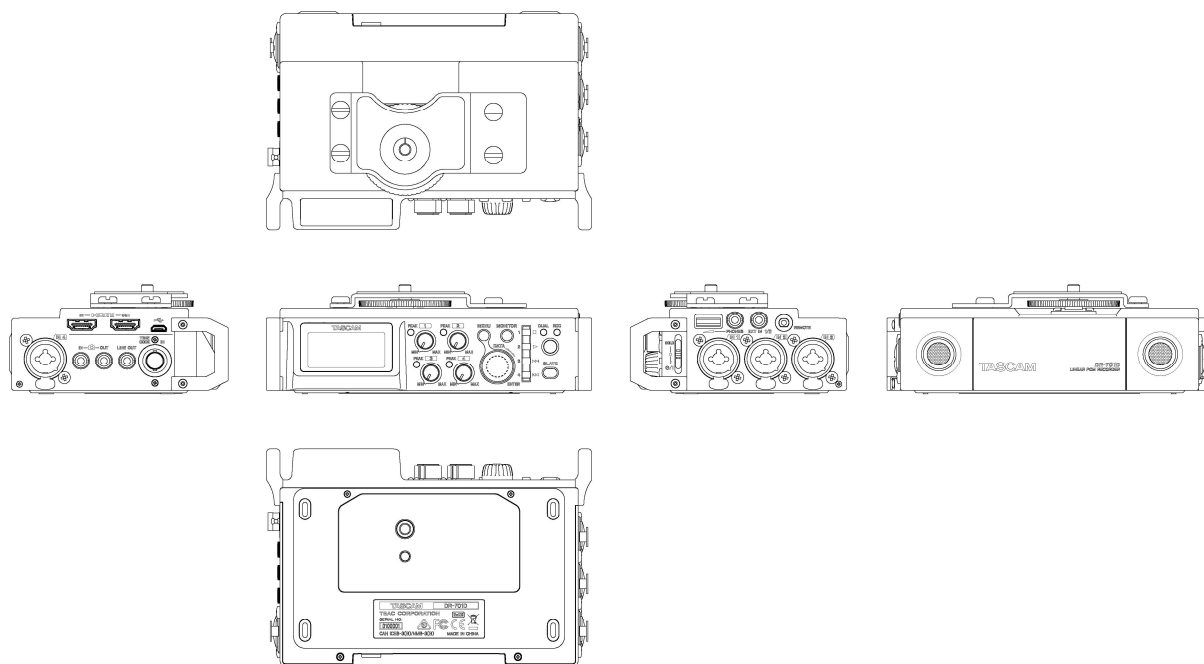

■ **Specifications**

Ratings

• **Recording media**

- SD card (64 MB–2 GB)
- SDHC card (4 GB–32 GB)
- SDXC card (48 GB–128 GB)

• **Recording/playback formats**

- WAV: 44.1/48/96/192kHz, 16/24-bit
- BWF: 44.1/48/96/192kHz, 16/24-bit

• **The number of input channels**

- 4 maximum (44.1/48/96kHz)
- 2 maximum (192kHz)

• **The number of recording tracks**

- 6 maximum (44.1/48/96kHz)
- 2 maximum (192kHz)

Inputs and outputs

- **IN 1/2/3/4 jacks (Phantom power supplied only to XLR)**
Connector: XLR-3-31, 6.3mm (1/4") standard TRS jacks
- **EXT IN 1/2 jack (can provide plug-in power)**
Connector: 3.5mm (1/8") stereo mini jack
- **MIC IN connector**
Connector: 3.5mm (1/8") stereo mini jack
- **PHONES jack**
Connector: 3.5mm (1/8") stereo mini jack
- **MIC OUT connector**
Connector: 3.5mm (1/8") stereo mini jack
- **LINE OUT jack**
Connector: 3.5mm (1/8") stereo mini jack
- **HDMI IN/OUT connectors**
Connector: Type A receptacle
- **USB port**
Connector type: Micro-B
Format: USB 2.0 HIGH SPEED mass storage class
- **TIMECODE IN connector**
Connector: BNC
- **REMOTE jack**
Connector: 2.5mm (3/32") TRS jack

Audio performance

- **Frequency response**
20 Hz – 20 kHz +0.5/–1 dB (LINE IN to LINE OUT, 48kHz sampling frequency, JEITA)
20 Hz – 40 kHz +0.5/–1 dB (LINE IN to LINE OUT, 96kHz sampling frequency, JEITA)
20 Hz – 80 kHz +0.5/–5 dB (LINE IN to LINE OUT, 192 kHz sampling frequency, JEITA)
- **Distortion**
0.007% or less (MIC IN to LINE OUT, 44.1/48/96/192kHz sampling frequency, JEITA)
- **S/N ratio**
100 dB or more (MIC IN to LINE OUT, –10 dBu input, 1 kHz, 44.1/48/96/192kHz sampling frequency, JEITA)
- **Equivalent input noise (EIN)**
–124 dBu or lower

Note: based on JEITA CP-2150

Recording times (in hours: minutes)

File format (recording setting)		SDHC card capacity
		4 GB
WAV/BWF 16-bit (2 channels)	44.1kHz	6:17
WAV/BWF 24-bit (2 channels)	96kHz	1:55
WAV/BWF 24-bit (2 channels)	192kHz	0:57

- The recording times shown above are estimates. They might differ depending on the SD/SDHC/SDXC card in use.
- The recording times shown above are not continuous recording times, but rather they are the total possible recording times for the SD/SDHC/SDXC card.
- If recorded in mono WAV format, the maximum recording time will be double the figures above.

- When using dual/4-channel recording in WAV/BWF format, the maximum recording time will be about half the figures above.

General

•Power

- 4 AA batteries (alkaline, NiMH or lithium)
- AC adapter (TASCAM PS-P515U, sold separately)
- External battery pack (TASCAM BP-6AA, sold separately)

•Power consumption

- 6.5 W (maximum)

•Consumption current

- 1.3 A (maximum)

•Battery operation time (continuous operation) (in hours: minutes)

●Using alkaline batteries (EVOLTA)

Use conditions	Operation time
Channels 1/2 unused Channels 3/4 use built-in mic Phantom power off HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 3:45
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 2:00
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI input connected (1080/60i) Recording 2ch 48kHz/16-bit WAV files	About 1:30

●Using NiMH batteries (eneloop)

Use conditions	Operation time
Channels 1/2 unused Channels 3/4 use built-in mic Phantom power off HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 4:00
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 2:30
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI input connected (1080/60i) Recording 2ch 48kHz/16-bit WAV files	About 2:00

● Using lithium batteries (Energizer ULTIMATE LITHIUM)

Use conditions	Operation time
Channels 1/2 unused Channels 3/4 use built-in mic Phantom power off HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 7:30
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI not connected Recording 2ch 48kHz/16-bit WAV files	About 6:30
Channels 1/2 used Channels 3/4 unused 3mA phantom power used for 2 channels HDMI input connected (1080/60i) Recording 2ch 48kHz/16-bit WAV files	About 3:30

NOTE

When using phantom power, the operation time might be reduced depending on the mic being used.

• Dimensions

169 × 57.3 × 113.5 mm (W × H × D with top adapter attached)

• Weight


654 g (including batteries)

561 g (not including batteries)

• Operating temperature range

0°C–40°C (32°F–104°F)

■ Dimensional drawings

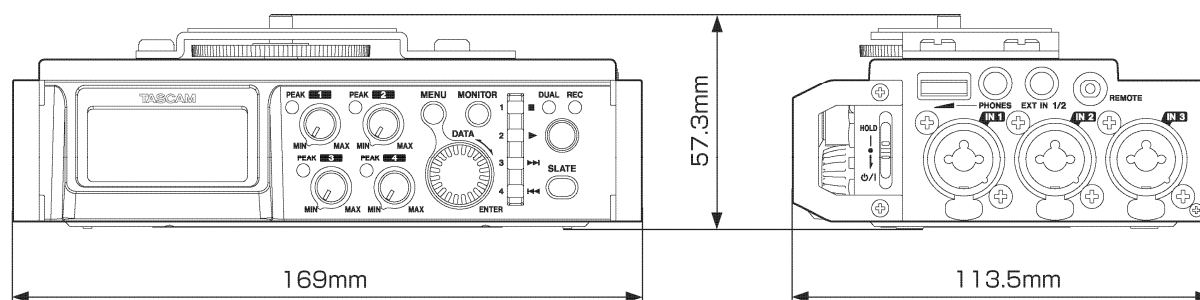

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.

※Other company names, product names and logos are the trademarks or registered trademarks of their owners.

※Specifications and appearance are subject to change without notice.

※All information included in this document is as of Nov, 2015.