

AV Bridge™ MATRIX PRO

AV Room Solution for USB/IP Applications

ORDERING INFORMATION

999-8230-000 (North America)

999-8230-001 (Europe/UK)

999-8230-009 (Australia/New Zealand)



OVERVIEW

Ideal for video conferencing and lecture capture applications, AV Bridge MATRIX PRO combines audio and video mixing functionality into a single device, allowing you to add multiple cameras, microphones and other AV devices into a traditional AV room design.

CONNECTIONS

Top row (L to R):

Serial RS-232 control port input; trigger inputs for macros and presentation automation; EasyMic ports for Vaddio table or ceiling MicPODS; mic or line inputs; line outputs.

Bottom row (L to R):

Power connector; network IP port; USB 2.0 port; 3 sets of Serial RS-232 control ports and EZ Power video ports with alternate HDMI video source inputs; RGBHV input; HDMI input; HSDS output for use with any Quick-Connect™ interface; HDMI output.

WHAT'S INCLUDED

- AV Bridge MATRIX PRO
- Quick-start guide
- 24V 3.75A power supply with AC cord set(s)
- Two rack ears
- Eight 3-position phoenix-style connectors
- 12-position phoenix-style connector
- 6' USB type A to B cable

FEATURES

- AV encoder with simultaneous IP and USB 2.0 streaming
- High-definition image quality – 1080p/30
- Four-input HD video switcher
- Built-In Quick-Connect™ Technology
- 9x5 cross-point audio matrix mixer/switcher
- Four EasyMic audio ports with built-in AEC
- Easy, intuitive web-based user interface for system configuration and settings
- Remote IP control of up to four Vaddio Cameras




TECHNICAL SPECIFICATIONS

A/V Encoding	IP resolutions: (H.264 & AAC Audio) up to 1080p/30 USB 2.0 resolutions: (MJPEG & PCM Audio) up to 1080p/30 (limits of USB 2.0)
Media Players	Quick-Time, RealPlayer and VLC Media Player (for IP Streaming), and more
Supported Input Resolutions	HDMI & YPbPr: 1080p/60/59.94/50/30/25 frames/s, 720p/60/59.94/50 frames/s, 1080i/59.94/50 fields/sec RGBHV (VESA): 1280 x 720@60Hz (16:9), 1280x768@60Hz (15:9)m, 1280x800@60Hz (16:10), 1360 x 768@60Hz (16:9), 1024 x 768@60Hz (4:3 centered in 16:9 frame) DVI (on HDMI connector using sRGB color space): 1080p/60/59.94/50frames/s, 720p/60/59.94/50Hz frames/s 1080i/59.94/50Hz, fields/s, 1440 x 900@60Hz, 1360 x 768@60Hz, 1280 x 800@60 Hz, 1280 x 768@60Hz, 1280 x 720@60Hz EDID Supported Resolutions: 1080p/60/59.94/50/frames/s, 720p/60/59.94/50Hz frames/s, 1440 x 900@60Hz, 1360x768@60Hz, 1280x800@60 Hz
Video/Audio DSP	Video: Auto-scaling, Noise Filter and Deinterlacing Audio: Compressor, Equalizer and Filters
Audio I/O	Four EasyMic Ports; four Mic/Line Inputs (with 4-AECs and phantom power for mics); four line outputs (9x5 matrix mixer) and HDMI
Control	Browser-based user interface for configuration and administration Front Panel Controls for viewing configurations and A/V muting Telnet on the Network RJ-45 Port RS-232 Port for support of legacy control products
USB and Network	USB: Type-B USB 2.0 Compliant Connector, Network: Shielded RJ-45 10/100 Base-T
IP Streaming	RTSP or HLS (Apple's HTTP Live Streaming)
Weight	5.6 lb (2.5 kg)
Height	3.47 in (8.8 cm)
Width	18.93 in (48 cm) (with rack ears)
Depth	8 in (20.3 cm)

Specifications are subject to change without notice.

BASIC CONNECTION

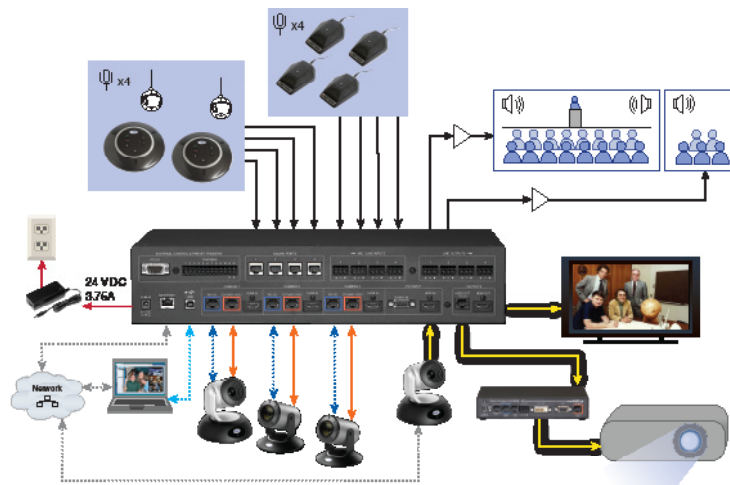

vaddio

THE ART OF EASY | vaddio.com
131 Cheshire Lane, Suite 500, Minnetonka, MN 55305

USA P 800.572.2011 E info@vaddio.com
EMEA P +31.495.580.840 E emea.sales@milestone.com
APAC P +852.2145.4099 E asia.sales@milestone.com

A brand of **legrand**

©2018 Milestone AV Technologies. 180065 6/18 Vaddio is a registered trademark of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

Commercial AV Brands Chief | Da-Lite | Middle Atlantic | Projecta | Vaddio