
zylight G-100

INTELLIGENT LED LIGHTING







- High CRI, High TLCI LED Light Engine
- Passive Cooling Fanless, Silent Operation

The Flat Fresnel

- Thin, Lightweight & Award Winning Design
- Water Resistant IP54 Rated
- 3200K, 5600K and Blacklight Versions
- Variable Spot/Flood
- Single Shadow Beam Shaping
- 14.4v Battery or Worldwide AC Power
- Rugged Durable Precise

zylight



The Flat Fresnel

It's Not Just Flat, it's Flexible

It may be the "Flat Fresnel," but the light quality of the F8-100 is anything but dull. The fully dimmable F8-100 uses an included AC power supply or a standard 14.4V camera battery, collapses to less than five inches thick (12cm), and is water resistant (IP54) so it's great for ENG. Plus, it features traditional Fresnel beam shaping, spot to flood operations, and custom barn doors. Perfect for studio or field use.

F8 Fresnel Specifications

Mechanical

Lens Diameter: 8" [200 mm] 15" x 12.6" x 4.6" Size: [380 x 320 x 120 mm] Weight: 9.5 lbs. [4.3 kg]

Mounting: Standard Yoke

Pole Yoke Mount (Optional)

Weather Resistance: IP54

Electrical

Input: 10 - 20VDC, 4 - Pin XLR,

14.4 V Battery Plate (Optional) 100W (8.0 Amps @ 14.4VDC)


Power: Passive/Silent Cooling:

Output

Variable 16° - 70° Beam Angle: 0 -100% Dimming: Control: Rear Panel Local,

ZyLink Wireless, DMX512A. F8-T (3200K), F8 - D (5600K)

Color Temperature: LED Life: 50.000 hrs. minimum. F8-D **F8-T**

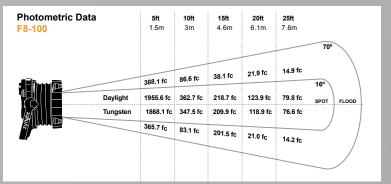

Form No. F8-100/1217
Specifications may be subject to change without prior notice. Refer to www.zylight.com for the most current product specifications.

zylight