

The **NEWZ** zylight

INTELLIGENT LED LIGHTING



- Ultra-Bright LED Matrix – Up To 92 CRI
- Variable Color Temperature – 3200-5800K
- Water Resistant (IP54)
- Fully Dimmable
- Passive Cooling - Fanless, Silent Operation
- Integrated Articulating Arm
- Quick Release Base
- Custom Barn Doors
- Battery or Optional Worldwide AC Power Supply
- ZyLink™ Wireless Control

The **NEWZ** zylight

Run-and-Gun with Style

The Newz on-camera light delivers unmatched flexibility in the field. Fully dimmable with variable color temperature, it delivers bright, natural looking light. A one-touch quick release base makes setup and breakdown a snap, and the unique articulating arm with continuous friction hinge makes it easy to adjust on the fly. Water resistant (IP54) and built to last, the Newz can handle the worst weather conditions and busiest ENG schedules.


Newz Specifications

Mechanical Size:	5.8" x 2.8" x 2.2" [147mm x 71mm x 56mm]
Weight:	16 oz [454g]
Power :	5-20 VDC
Energy Use:	15W max. [1.25A @ 12VDC]
AC Adapter:	DC 100 – 240V AC, 50/60Hz
Color Temp:	Continually Variable. 3200-5600k
CRI Index:	92+
Beam Angle:	60° FWHM – 90° Total Field
Dimming:	0-100%
Cooling:	Passive/Silent
Operating Range:	-20 – +40 C
Electrical Option:	Worldwide AC power supply, 7.2 or 14.4v camera battery powering. Integrated D-Tap cable
Mounting:	Integrated Articulating Arm, 1/4-20 socket/Hot shoe
Wireless Frequency:	2.45 GHz
Wireless Channels:	10, User Selectable
Assembly Materials:	Aircraft Aluminum
Calibration:	Factory
IP Rating:	54
Variable Refresh Rate:	11.8 KHz
LED:	High CRI LED - 50,000 hrs. min.
Certifications:	IEC, FCC, IC

Specifications subject to change without notice. The Zylight Newz is protected by multiple US and Foreign patents with other US and Foreign patents pending.

Photometric Data

Newz

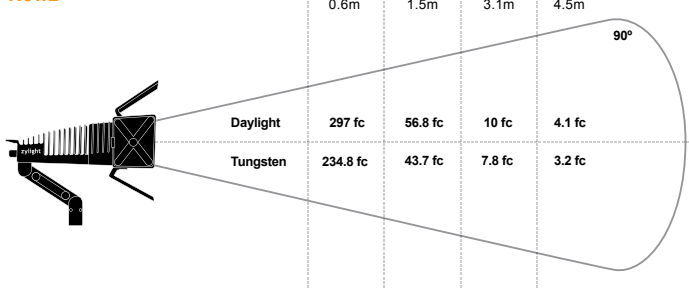

Form No. NEWZ/1217

Specifications may be subject to change without prior notice. Refer to www.zylight.com for the most current product specifications.

zylight