

CAM-3


Portable 3-Channel Microphone Mixer

OPERATING MANUAL



Thank you for purchasing the Azden CAM-3 Portable Microphone Mixer. It is a highly versatile, compact mixer. It does not require a power source and is ideal for field use.

NOTE: The CAM-3 is designed to work with microphones only. Other audio devices, like MP3 or CD players will not work with the CAM-3.

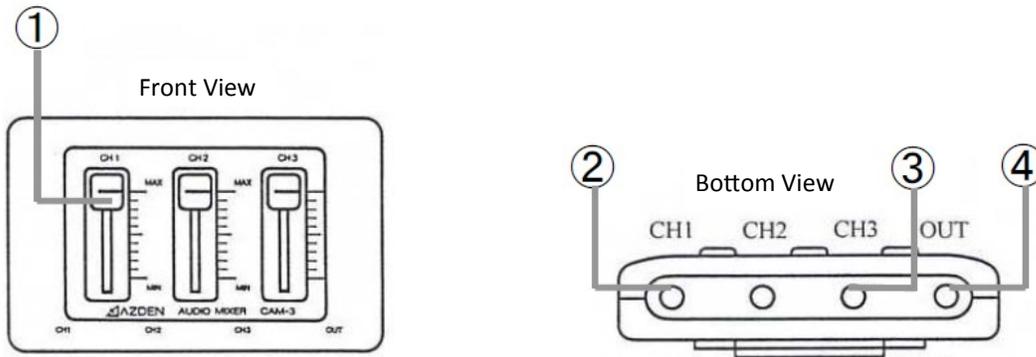

① **Volume Sliders**

Set the 3 volume sliders to the “MAX” position and adjust them as necessary to make up for differences in microphone types and volume levels. Do not be concerned if the 3 volume sliders are in widely different positions.

② **CH1 & CH2 MIC Input Jacks (Monaural)**



Plug microphones into CH 1 and/or CH 2 jack. Audio into CH 1 will output into the Right channel and CH 2 to the Left channel.

③ **CH3 Stereo MIC Input Jack**

Connect a stereo microphone here. Audio will be equally output between the Right and Left channels.

④ **Output Jack (Stereo)**

Using the supplied cable, connect the CAM-3 to the microphone input of a video camera or other recording device.

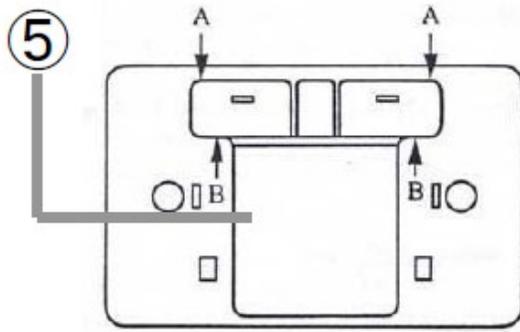

⑤ Belt Clip

To remove: Press down gently and push the tabs in direction “A”.

To attach: Press down gently and push the tabs in direction “B”.

The belt clip may be mounted in 4 different positions.

ADJUSTMENT

Monitor the sound by plugging a headphone or earphone (not included) into the headphone output jack on the video camera. After mounting the CAM-3 and making all the connections, set the 3 volume sliders to the “MAX” position. Adjust the volume sliders as necessary, to make up for differences in microphone types and sound levels. Do not be concerned if the 3 volume sliders are in widely different positions.

SPECIFICATIONS

Inputs:	CH1: Mic (mono 3.5mm mini-jack) Right channel CH2: Mic (mono 3.5mm mini-jack) Left channel CH3: Mic (stereo 3.5mm mini-jack)
Output:	Mic (stereo mini-jack)
Input level:	-64dBv (0.63mV)
Output level:	-64dBv (0.63mV)
Dimensions:	3 3/8”L x 2 1/8”H x 1/4”D
Weight:	2.6 oz

** Due to constant improvements, specifications are subject to change without notice.*

TWO-YEAR WARRANTY

Azden Corporation warrants, to the first purchaser, that the Azden brand product purchased is free from defects in material and workmanship. Azden's sole obligation under this warranty shall be to provide, without charge, repair or replacement (at Azden's sole discretion), within two years from the date of purchase. A dated receipt acts to establish the date of purchase.

This warranty is the sole and exclusive express warranty with respect to the product and all other warranties, expressed or implied, are hereby excluded. Neither Azden, nor the dealer who sells this product, is responsible for indirect, incidental or consequential loss and/or damages.

This warranty does not extend to any defect, malfunction or failure caused by misuse, abuse, accident, faulty hookup, unauthorized modification or defective associated equipment for which it is not intended. **Please read your operating manual carefully.**

This warranty gives you specific legal rights. You may also have other rights which may vary from state to state.

To register this product, visit www.azdencorp.com/warranty



147 New Hyde Park Rd, Franklin Square, NY 11010

Phone: 516-328-7500 / Email: sales@azdencorp.com / Web site: www.azdencorp.com