

RemoteAmp CE

HEADPHONE / EARPIECE AMPLIFIER

The RemoteAmp is a simple battery-powered personal headphone amplifier.


Use the RemoteAmp as an IFB earpiece or headphone amplifier, or as an on-stage monitor headphone amplifier. This low-distortion, 1 watt amplifier will cut through the crowd noise without distortion.

The RemoteAmp clips to your belt and accepts a 3-pin XLR audio input from a mixer, distribution amplifier, telephone line hybrid, or a handset interface like our QuickTap IFB. You'll like the convenience features, such as the separate power switch, which allows you to leave the volume control set at a comfortable level.



FEATURES

- 1/4" 8 ohm headphone jack
- 1/8" 150 ohm earpiece jack
- Battery test indicator
- Easy change battery compartment
- Stainless steel belt clip

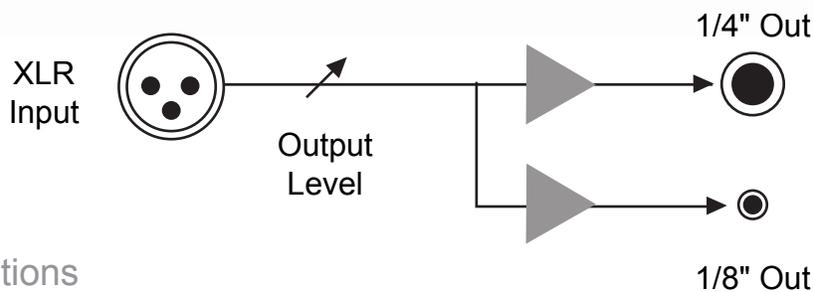

Specifications

	Input		Output		Weight:	10 ounces
	Balanced Female XLR	1/4" Stereo	1/8" (3.5mm) Mono			
Impedance:	4 k ohms	8 ohms	150 ohms		Size:	5.1" x 2.7" x 1.3" (13 x 6.9 x 3.3 cm)
Level (Line):	100 mV RMS -18 dBu nom (+12 dBu max) 46 dB max gain	1 watt max	100 milliwatts nominal			