


MSRP: \$150.00 USD

MA251

ROLLS

5 + 5 WATT MIXER - AMPLIFIER

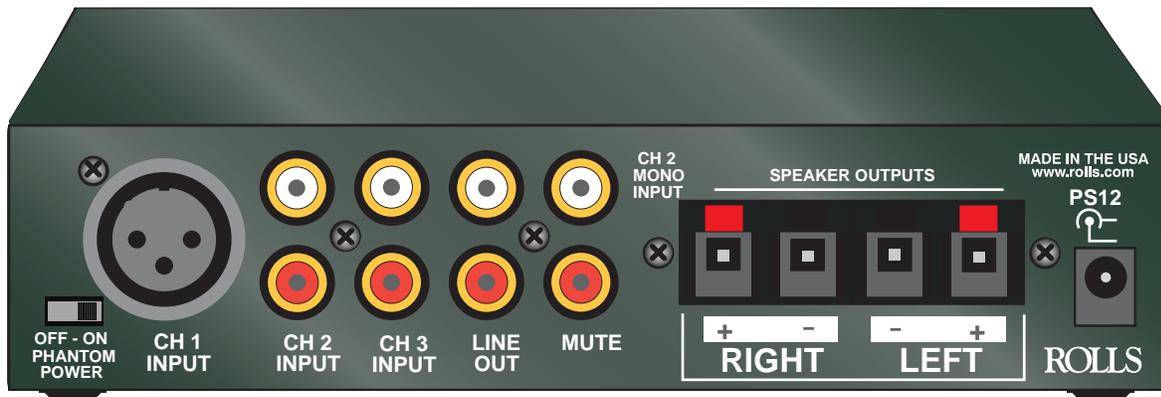

The new MA251 is a compact class D stereo amplifier with a 4 CH. stereo mixer built in. It has 5 watts per channel @ 4 Ohms. The class D low heat design gives the MA251 the ability to be mounted in very tight applications. It will work great in ceilings by projectors, or anywhere small and heat free amplification is required. The MA251 is in an all metal chassis and weighs 1 pound. Overall dimension are 6.75" X 3.5" X 1.5". Bottom mounts are provided for permanent installations. The MA251 has an included 12 VAC external power supply. The 4 channel mixer section consists of 2 separate RCA stereo inputs, along with an XLR mic input and a 3.5mm (1/8") stereo input perfect for an ipod or laptop computer type input. Phantom power is supplied to the XLR input by a switch on the back of the MA251.

SPECIFICATIONS

Line Input Impedance: 10K Ohms line
600 Ohms mic
Power Output: 5 watts X 2 @ 4 Ohms.
Voltage Gain: 55 dB mic
30 dB line
Maximum Supply Voltage: 24 VDC
THD: .05% typical
Efficiency: 85%
Bandwidth: 20Hz - 25 kHz
Size: 6.75" x 3.5" x 1.5"
Weight: 1 lb.

**ROLLS
MIXER - AMP
5 + 5 Watts**

INSTALLATION MIX - AMPLIFIER

STEREO INPUTS AND OUTPUTS

ROLLS

5968 SOUTH 350 WEST S.L.C., UT 84107


PHONE: 801-263-9053

FAX: 801-236-9068

DATA SHEET FOR MA251

www.rolls.com

Size: 6.75" X 3.5" X 1.5"

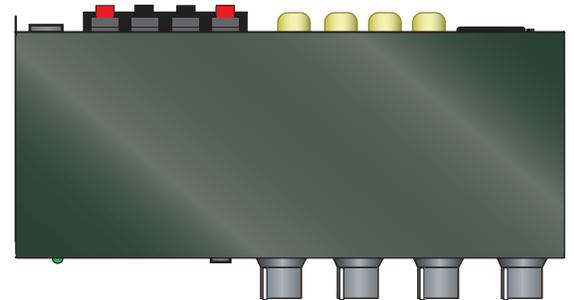

Included - 12 VAC ROLLS PS12 external power supply



MADE IN USA

