
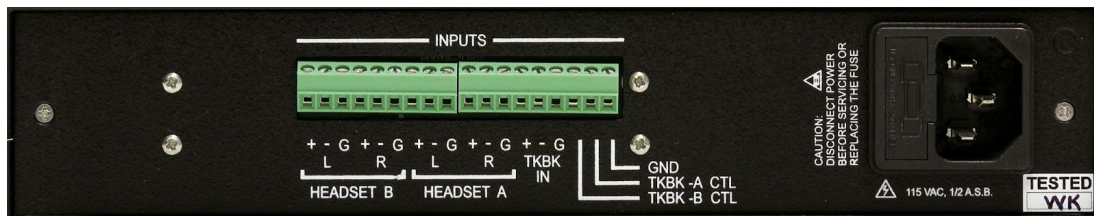


# POD5

## DUAL HEADSET AMPLIFIER

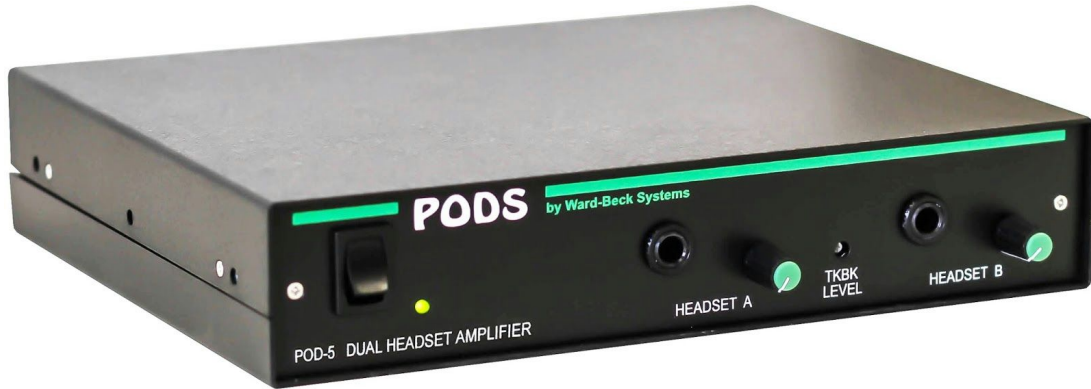

by Ward-Beck Systems

Rev:Oct.01 2014

# POD5

## DUAL HEADSET AMPLIFIER

**This is one of many in our line of top quality, low-cost broadcast problem solvers. PODS are compact, rugged and affordable. They are suited for tabletop use, or rack-mountable singly or in pairs, in any combination.**

---

POD5 is a dual stereo headset amplifier with a separate external talkback input. When activated the external talkback is fed to the right ear while a mono sum of the stereo signal is fed to the left ear.

Two ¼ inch TRS headset jacks and level controls are located on the front panel. A screwdriver adjust for talkback level is also provided.

Connections to POD 5 are via screw terminals located on the rear panel. Channel A and B have separate talkback control inputs, they can be controlled separately or tied together. The talkback input is activated by grounding the appropriate control input..

## SPECIFICATIONS

Nominal Operating Level	+4dBu
Headset Gain	off to +10dB
Talkback Gain	-6dB to +6dB
Max Output Level	+24dB @ 600 $\Omega$ , +21dB @60 $\Omega$
Frequency Response	$\pm$ 0.2 dB, 20Hz to 20kHz
S/N	better than 80 dB, 20Hz to 20kHz
Total Harmonic Distortion	better than 0.05%, 20Hz to 20kHz
Input Impedance	greater than 20,000 $\Omega$
Stereo Separation	better than 60dB, 20Hz to 20kHz
Crosstalk	better than 80dB, 20Hz to 20kHz
Power Requirements	115 VAC ,60Hz (available upon request) 230 VAC,50Hz
Dimensions	8.69" wide x 1.73" high x 7.0" deep (221mm x 44mm x 178 mm)
Weight	1.37 kg (3.01 lbs)

*Ward-Beck Systems Ltd. reserves the right to change performance specifications without prior notice.*

## **WARRANTY**

All Ward-Beck Systems Ltd. products are warranted against defective materials and workmanship for a period of one year from the date of shipment.

Ward-Beck Systems Ltd. will repair or replace, at its option and without charge, all said products or parts thereof which upon factory inspection prove to be defective during the warranty period, provided that:

1. The original serial numbers are intact and have not been tampered with.
2. The purchaser shall return any equipment or parts thereof to Ward-Beck Systems Ltd. only after obtaining prior authorization and shipping instructions from the factory. (Ward-Beck Systems Ltd. reserves the right to inspect or repair equipment on the purchaser's premises).
3. The purchaser assumes the obligation for all expenses in connection with the shipping and return of such goods, once authorization has been obtained.

This warranty does not cover items normally considered expendable, such as fuses and lamps.

This warranty does not cover damages caused by misuse, accident, neglect, unauthorized alteration, repair by unauthorized personnel, or damage caused by an act of God, war, or civil insurrection.

In no event shall Ward-Beck Systems Ltd. be liable for consequential damages. Ward-Beck Systems Ltd. shall have the rights to final determination as to the application of this warranty.

Ward-Beck Systems Ltd. reserves the right, at any time and without notice, to make changes in its equipment, components, specifications or designs, as may be warranted by progress in state-of-the-art technology.

Ward-Beck Systems Ltd. reserves the right to make design changes, additions to, and improvements in its products, without obligation to install such revisions in products previously manufactured.

The warranty set forth herein is in lieu of all other warranties expressed or implied, including the warranties of merchantability and fitness.

**WARD-BECK SYSTEMS LTD.**  
**945 Middlefield Road, Unit 9, Toronto, Ontario M1V 5E1**  
**V 416 335 5999 F 416 335 5202 Toll-Free 800 771 2556**  
**Website: [www.ward-beck.com](http://www.ward-beck.com)**

**E-Mail: [sales@ward-beck.com](mailto:sales@ward-beck.com)**