

Standard Earset



Performance You Can Hear


The Mogan Standard Omni Earset Microphone offers exceptional performance and unbeatable value. Featuring a 3.0 mm Omni condenser capsule, it delivers exceptional audio quality to budget-conscious presenters. A flexible boom and earpiece enables positioning on one's left or right ear for best-in-class stability and comfort. Mogan's interchangeable cable system enables one to connect a single microphone to most popular wireless transmitters. It is ideal for the stage, pulpit, classroom, or podcast studio.

Model	Connector	SKU
Standard Earset	AKG	EAO-BG-AK
Standard Earset	Audio-Technica	EAO-BG-AT
Standard Earset	Sennheiser	EAO-BG-SE
Standard Earset	Shure	EAO-BG-SH

Kit Contains:

- Earset microphone
- Reinforced cable
- Foam windscreens
- Single-cable clip
- Carrying case

Capsule	Back-electret condenser
Polar Pattern	Omni-directional
Frequency Response	50 Hz to 16 kHz
Sensitivity	-44 ± 3 dB re 1 V/Pa
Equivalent Noise Level	39 dB (A-weighted)
Signal-to-Noise Ratio	60 dB
Output Impedance	2.2 K Ω ± 30%
Maximum SPL	96 dB
Operating Current	<100 mA
Power Requirement	1.5 VDC (opt), 5 VDC (max)
Color	Beige
Overall Length	155 mm
Boom Length	110 mm
Capsule Diameter	3.0 mm
Connector Type	Compact-screw
Cable Length	1.8 m (6 ft)
Cable Diameter	1.2 mm
Weight	15 g

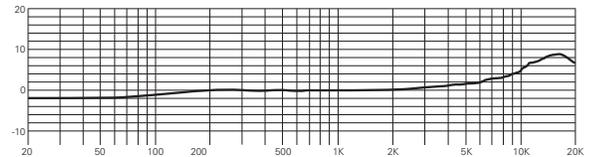

Connectivity

Mogan's interchangeable cable system enables one to connect a single microphone to multiple wireless transmitters. Each microphone includes a cable with a hardwired connector for Shure, AKG, Sennheiser, or Audio-Technica. These cables are also available for special order.

Limited Warranty

Mogan Microphones are warranted to be free of defects in materials and workmanship for one year. Visit www.moganmicrophones.com for details.

