

### Overview

The Rackmount Balun Chassis 6 is designed as a head-end cable management solution to allow any combination of up to six (6) MuxLab square baluns to be installed in a 19" relay rack. Head-end AV equipment such as DVD players, video servers and sat boxes may be installed in a local wiring closet and connected to the Cat5E/6 structured cabling system via a wide array of MuxLab balun solutions.

The baluns may be installed with the RJ45 either front or rear facing depending on where the Cat5E/6 cabling will enter or exit the system. At the display end, the appropriate MuxLab baluns are installed at the display to support a fully Cat5E/6 cabling solution.

Each balun snaps into place and is held firmly by a spring latching mechanism. The one-piece design makes the product easy to install and maintain. There are no parts to lose or replace. Blank Filler Modules (500901) may be ordered separately to fill in unused slot positions.

### Applications

- Custom AV installations
- Head-end audio-video systems
- Home AV systems
- Boardroom systems
- Digital signage systems



### Features & Benefits

- Space efficient – 1U height
- One-piece design
- Latching mechanism for secure installation
- Supports up to six (6) baluns
- Snap-in design for ease of installation
- Baluns install forward or rear-facing
- Includes four (4) rackmount screws and washers
- Slot number silkscreen on front and rear.
- Blank Filler Modules (500901) sold separately.


Specifications	
<b>Environment</b>	Custom audio-video systems in a structured cabling environment.
<b>Application</b>	Head-end installations, audio-video rooms, telecom rooms.
<b>Capacity</b>	Six (6) positions.
<b>Compatible baluns</b>	MuxLab baluns measuring: 2.4" x 2.25" x 1" (6.1 x 5.7 x 2.5 cm).
<b>Orientation</b>	Baluns may be installed front or rear facing.
<b>Snap-in mechanism</b>	Baluns lock into position via spring latch mechanism.
<b>Rack height</b>	1U (1.75").
<b>Enclosure</b>	Black painted steel
<b>Mounting holes</b>	Four (4) rack mounting holes
<b>Mounting hardware</b>	Four (4) rack mounting 10-32 screws and washers are included.
<b>Slot Id</b>	Silkscreen on front and rear. Slots numbered "1" to "6".
<b>Dimensions</b>	19" (W) x 1.75" (H) x 3.0" (D) (48 cm x 4.45 cm x 7.6 cm).
<b>Weight</b>	1.9 lbs (.86 kg).
<b>Standards</b>	EIA/TIA.
<b>Warranty</b>	Lifetime.
<b>Order Information</b>	500902 Rackmount Balun Chassis 6 500901 Blank Filler Modules for 500900 and 500902 (Package of 4)

### MuxLab Inc.

8495 Dalton Road, Mount Royal, Quebec, H4T 1V5  
 Tel: (514) 905 0588 Fax: (514) 905 0589  
 Toll Free: 877 689-5228 (North America)  
 E-mail: [videoease@muxlab.com](mailto:videoease@muxlab.com)  
 URL: [www.muxlab.com](http://www.muxlab.com)

# Rackmount Balun Chassis 6 500902

## Typical Application

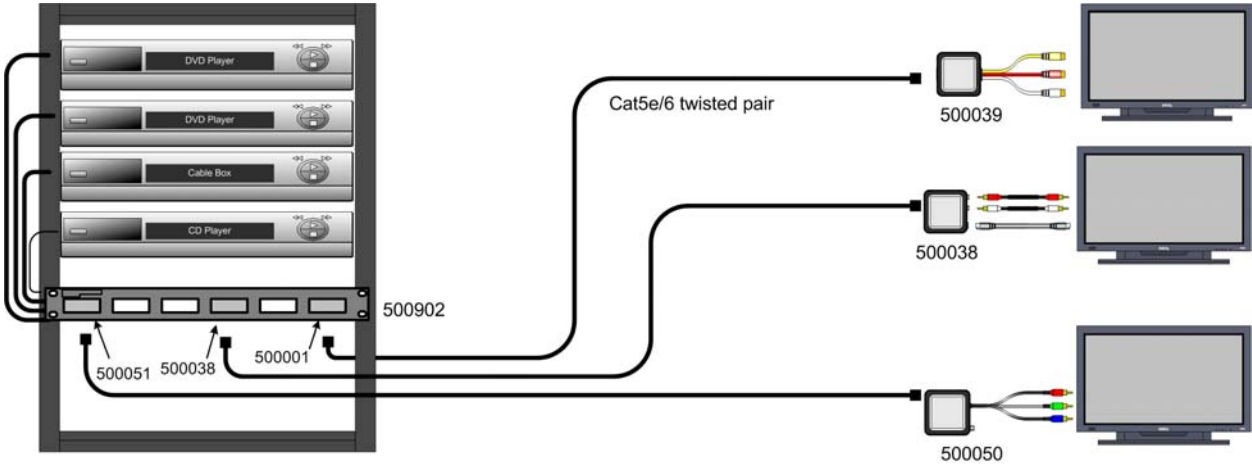

Fully loaded - front view



Fully loaded - rear view



Blank Filler Module (500901)  
(Package of 4)

**MuxLab Inc.**  
8495 Dalton Road, Mount Royal, Quebec, H4T 1V5  
Tel: (514) 905 0588 Fax: (514) 905 0589  
Toll Free: 877 689-5228 (North America)  
E-mail: [videoease@muxlab.com](mailto:videoease@muxlab.com)  
URL: [www.muxlab.com](http://www.muxlab.com)