
## **AV902 Series**

## S-Video / Stereo Audio Baluns



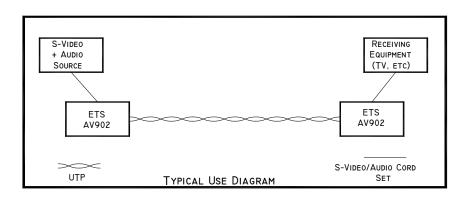

Features/Advantages	Description	Applications	
<ul> <li>S-Video (Y/C baseband) channel and 2 audio channels on one run of UTP</li> <li>Use for point-to-point replacement of coax and shielded cables</li> <li>Rugged plastic case</li> <li>Made in USA</li> <li>100% tested</li> </ul>	The ETS AV902 S-Video/Stereo Audio Balun adapts Cat5 or better premise wiring for use with Super-VHS, Hi-8 and other "Y/C" format, high quality video signals. The AV902 uses the industry standard 4 pin mini-DIN connector for video, and RCA jacks for the two audio channels. This arrangement complements the connectors on most high-end consumer and Y/C format professional video devices.  The AV902 is a passive (non-powered) device. It is bi-directional, in the sense that identical baluns are used on transmit and receive ends of the run of UTP. Used in pairs to adapt both ends of a run of Cat5 or better cable, the result is clean, transparent video and audio transmitted over distances exceeding 300 meters.  The AV918 is a (powered) UTP S-Video/Stereo Distribution Hub which has two channels with audio	<ul> <li>Applications</li> <li>Home Theater</li> <li>High-Resolution Remote Monitors</li> <li>"Prosumer" Video Equipment</li> <li>Video Projection Systems</li> </ul>	
	transmission through the distribution amplifier creating 8 output sets from a single source.		

	Specifications		Product Ordering Information
Bandwidth	Flat to 60 MHz (video) / 10Hz to 20kHz (audio)	AV902	S-Video (Mini-DIN) + (2) RCA Audio to RJ45
Connectors	4 pin Mini DIN (video) / (2) RCA jack (audio) to RJ45 jack		jack, (video) pins 1,2 & 7,8; (audio) pins 4,5 & 3,6
Crosstalk	>50dB (video)	AV918	S-Video, 8 Channel Distribution Hub
Impedance	600:600 (audio)		
Isolation	500 V (audio, per channel)		
Distance	1000 ft		
Dimensions	66mm x 66mm x 28mm		
Net Weight	0.09 kg		

© Copyright 2005-2011 Energy Transformation Systems, Inc. FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5<sup>TM</sup>, FatCat5 System<sup>TM</sup>, Chameleon Color Coding System<sup>TM</sup>, Balanced Star<sup>TM</sup>, Balanced Line<sup>TM</sup>, Monoline<sup>TM</sup> and Precision Wave<sup>TM</sup>, InstaSnake<sup>TM</sup>, CineSnake<sup>TM</sup> are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.

Revised 10/26/2011



Energy Transformation Systems, Inc. 43353 B Osgood Road, Fremont, CA 94539 www.etslan.com 800-752-8208 510-656-2012 Fax 510-656-2026

