

Specifications

Environment	HDMI 1.3a
Devices	DVD, plasma, projectors, monitors, TV, PC, laptops, servers supporting HDMI.
Transmission	Transparent to the user
Bandwidth	340 MHz
Signals	HDMI 1.3a protocol
Connectors	One (1) HDMI receptacle. One (1) SC Fiber connector. 3.5mm jacks for IR emitter and sensor DB9 Connectors for RS-232 Ports <i>Note: Fiber and serial cables not included.</i>
Maximum Distance <i>Based on a maximum length of 6.6 ft (2 m) of HDMI cable per end.</i>	1080P video may be extended up to 1000 feet (305m), depending of the type of fiber used. 100m (300 ft) on 62.5/125 μ m (OM1) multi-mode SC fiber 305m (1000 ft) on 50/125 μ m (OM3) multi-mode SC fiber.
Cable	One (1) Multimode fiber 50/125 μ m or 62.5/125 μ m cable required
Power Supply	Two (2) 110-240V/5VDC power supplies with interchangeable blades
Power Consumption	Transmitter: 2.7 Watt Receiver: 2.3 Watt
Temperature	Operating: 0° to 40°C Storage: -20° to 85°C Humidity: Up to 95% non-condensing
Enclosure	Steel
Dimensions	4.00" x 3.00" x 0.876" (10.2 x 7.6 x 2.2 cm)
Weight	2.0 lb (0.9 kg)
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0
Warranty	2 years
Order Information	500460 HDMI Fiber Extender Kit



HDMI Fiber Extender Kit 500460

Quick Installation Guide

Overview

The HDMI Fiber Extender Kit (500460) allows HDMI equipment to be connected up to 1000 ft (305 m) @ 1080p Deep Color via one (1) 50/125 μ m Multimode fiber cables in a point-to-point configuration. The kit comes with one (1) Transmitter and one (1) Receiver as well as an IR Emitter (500998) and IR Sensor (500999) for remote control applications.

Applications

Applications include commercial and residential AV systems, classroom projector systems, digital signage, boardroom systems, collaborative PC systems, and medical information systems.

Installation

1. Identify the connectors on the Transmitter and Receiver as indicated on the product labels.




8495 Dalton Road, Mount Royal, Quebec, Canada. H4T 1V5

Tel: (514) 905-0588 Fax: (514) 905-0589

Toll Free (North America): (877) 689-5228

E-mail: videoease@muxlab.com URL: www.muxlab.com

2. Verify that the distance between the HDMI Transmitter and Receiver is within MuxLab specifications (see Specifications table).
 3. To install the Transmitter:
 - 3a. Connect the Transmitter to the HDMI video source with an HDMI compliant cable.
 - 3b. Connect one (1) length of multi-mode fiber cable to the SC Fiber connector on the Transmitter.
 4. To install the Receiver:
 - 4a. Connect the Receiver to the HDMI display equipment with an HDMI compliant cable.
 - 4b. Connect the one (1) length of multi-mode fiber cable to the SC Fiber connector on the Receiver.
 5. Connect the 5 VDC power supply to the Receiver first, and then plug the power supply into an AC power outlet. Connect the 5 VDC power supply to the Transmitter first, and then plug the power supply into an AC power outlet. If power is present, the green power LED of the Transmitter and the Receiver will be ON.
- Note: Power the HDMI Fiber Extender only after all connections are made.**
6. Power on the HDMI equipment and verify the image quality.
 7. If infrared remote control is needed, connect the IR Sensor to the 3.5mm Stereo Jack of the receiver and the IR Emitter to the 3.5mm Mono Jack of the Transmitter.
- Note: You can differentiate the IR Sensor and the IR Emitter by looking at the 3.5 mm plug. The IR Sensor is using a Stereo Plug (3 Contacts) and the IR Emitter a mono plug (2 Contacts).**
8. Position the IR Sensor so that it is directed to the hand-held remote control. For a clear IR signal reception, aim the hand-held remote control to the top of the IR Sensor enclosure.
 9. Position the IR Emitter as close as possible to the source's IR Sensor (i.e. DVD player). For a clear IR signal reception, the IR Emitter can be glued on the source's IR Sensor. The IR Emitter's signal is transmitted from the side of the enclosure.
 10. The following diagram shows the final configuration.

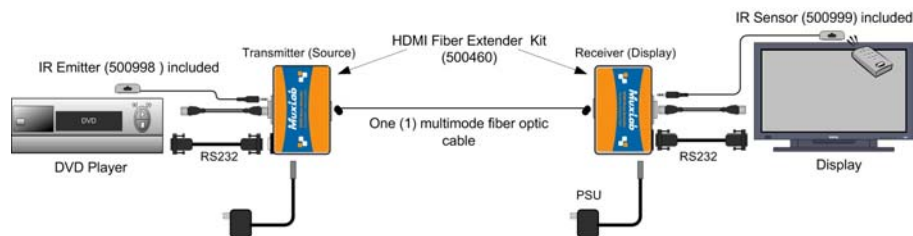

Troubleshooting

The following table describes some of the symptoms, probable causes and possible solutions in respect to the installation of the HDMI Fiber Extender Kit:

Symptom	Tx LEDs			Rx LEDs			Probable Cause	Possible Solutions
	Power	HDMI	Fiber	Power	HDMI	Fiber		
No Image	OFF	OFF	OFF	OFF	OFF	OFF	No power	• Check power connections
No Image	ON	OFF	OFF	ON	OFF	OFF	Fiber Cable	• Check the Fiber cables.
No Image	ON	OFF	ON	ON	OFF	ON	HDMI Cable	• Check the HDMI Cable.
No Image	ON	ON	ON	ON	ON	ON	Synchronization	• Check cable length.
Flickering Image	ON	ON	ON	ON	ON	ON	Synchronization	• Check cable length • Check the HDMI Cable Quality.
Choppy sound	ON	ON	ON	ON	ON	ON	Synchronization	• Check cable length • Check the HDMI Cable Quality.
Green or pink hue	ON	ON	ON	ON	ON	ON	DDC communication	• Cycle power of the HDMI Extender.
Image flickers when powering up nearby equipment	ON	ON	ON	ON	ON	ON	Interference	• Move HDMI Fiber Extender away from the source of the interference.
IR not functioning	ON	ON	ON	ON	ON	ON	Remote control not directed to the IR Sensor or IR Emitter not directed to the source.	• Make sure the IR Sensor is directed towards the remote and the IR Emitter to the equipment
IR not functioning	ON	ON	ON	ON	ON	ON	Interference from sunlight, Fluorescent, Neon or Halogen lights	• Place the IR equipment away for the interfering light
IR not functioning	ON	OFF	OFF	ON	OFF	OFF	Interference from RF radiation from the TV	• Place the IR equipment away for the RF radiation

If you still cannot diagnose the problem, please call MuxLab Customer Technical Support at 877-689-5228 (toll-free in North America) or (+1) 514-905-0588 (International).