WARRANTY

For complete information on the Rolls 1 Year Warranty, and to register this product, see our website at www.rolls.com.


DESCRIPTION

The HV6 is an in line headphone volume control. It accepts a stereo headphone level and allows the user to attenuate the volume to their headphones. With the included belt clip and recessed volume the HV6 is perfect for live applications.

The HV6 includes a removable belt clip installed a the factory. A 1/4" stereo to XLR cable is provided to connect the HV6 to a stereo input. The XLR connector is a locking type that will not pull out if you are using the HV6 in a live application.

NOTE: The XLR connector is not for mics or line level siganls it is for headphone level input only. It is also not a balanced input it is a stereo input (left, right and Ground). Pin 2 is left, pin 3 is right and pin 1 is ground.

1/4" and 3.5mm outputs for connection to your headphones. These are in parellel of each other.

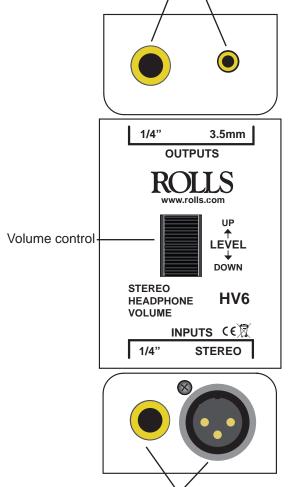

Inputs are a 1/4" stereo connector or the "STEREO" XLR input. As mentioned above this locking XLR jack is for stereo connection at headphone level only.



... αυλωμειε λοη μεες ιειιαριε μεαφορουε

volume control

- Broadcast

- ΓΙΛ

oibuid -

HV6 Stereo Headphone Volume Control

- Belt Clip Included.
- Included locking XLR stereo connector.
- Full Metal chassis for reliability.

The HV6 is an in line headphone volume control. It accepts a stereo headphone level and allows the user to attenuate the volume to their headphones. With the included belt clip and recessed volume the HV6 is perfect for live applications.

NOTE: The XLR connector is not for mics or line level siganls it is for headphone level input only. It is also not a balanced input it is a stereo input (left, right and Ground). Pin 2 is left, pin 3 is right and pin 1 is ground.

SPECIFICATIONS

Size: Weight: 3″ x 2.25″ x 1.25″ 7 oz.





Rolls Corporation Salt Lake City, UT 11/12