MULTI-K-XL

Variable Color Temperature LED Studio Light

Overview

The variable color temperature 12 1/4" x 5" LED Studio Light delivers field-tested reliability, solid construction, and all the features required for professional performance.

The Multi-K XL's features include energy efficient 3200K and 5600K LEDs, a 30-degree lens, and full DMX capabilities that delivers reliable, consistent performance.

The Multi-K XL LED Studio Light features individually adjustable RGB LED bulbs that allow you to easily control the color temperature between 2800K and 6500K. If the light is mounted overhead or cannot be reached, the Multi-K XL is DMX controlled for dimming and powering the unit on and off. On-board dimming and RGB mixing is also available if a DMX solution is not being used. An integrated yoke mount makes the Multi-K XL easy to set up. A multi-voltage DC power supply is included.

MULTI-K-XL | Variable Color Temp LED Studio Light **| UPC Code:** 847983006106

Special Features

- Solid metal construction
- Six Variable Color Temperature Presets
- 24 Volt D/C Power Supply Included
- DMX 512 Compatible
- Yoke Mount Included

Recommended For

- Studio Lighting
- Event Lighting
- Documentary Style Lighting
- Interviews

www.facebook.com/ikanseeit

www.twitter.com/ikancorp

www.vimeo.com/ikancorp

www.youtube.com/ikancorp

ikan

www.ikancorp.com   1.713.272.8822   sales@ikancorp.com

MULTI-K-XL

Features you need, Prices you want.

DMX 512 Compatibility

Once the desired color temperature has been dialed in through the Multi-K-XL's on board controls, ikan's DMX compatibility feature provides full dimming control of the set color temperature remotely from any DMX 512 compatible system.
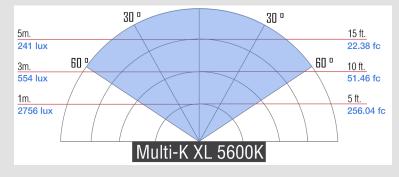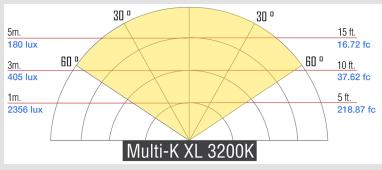
What's Included

1 x MULTI-K-XL Light
1 x 24v DC Power Supply
1 x Yoke Mount

Specifications

Beam Angle	30°
Brightness	3' / 1000 lux / 3200K
Build Material	Aluminum
Color Temperature	2800K-6500K
Control	Button
Cooling System	Passive Heat Sync
Dimensions	19" x 19" x 9"
Dimming	10-100%
Fixture Size	12.25" x 5" x 13.75"
Fixture Weight	11 lbs
Focusing	NO
Head Type	Bi-Color
Light Source	72 1.2w LED @5600K, 72 1.2w LED @3200K
Mount	Yoke
Operating Volts	24v
Power Supply	24v @ 6.66 Amp
Rating	120v @ 60Hz
Watts Draw	132 watts
Shipping Weight	17 lbs

Photometrics

Multi-K XL 5600K

	Metric	Imperial	
5m.	241 lux	15 ft.	22.38 fc
3m.	554 lux	10 ft.	51.46 fc
1m.	2756 lux	5 ft.	256.04 fc

Multi-K XL 3200K

	Metric	Imperial	
5m.	180 lux	15 ft.	16.72 fc
3m.	405 lux	10 ft.	37.62 fc
1m.	2356 lux	5 ft.	218.87 fc

8 47983 00610 6

ikan