

SDI CONVERSION


DA-SDI-HDTV

SDI to HDMI / DVI Converter with looping inputs




SDI-HDTV-II

SDI to HDMI / DVI Converter

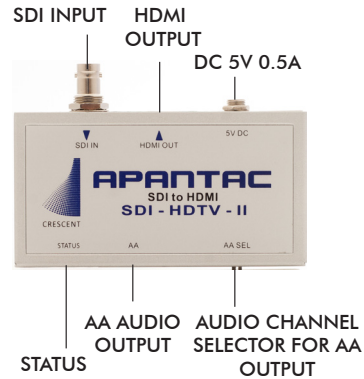

DA-HDTV-SDI


HDMI to SDI Converter with looping input and dual output built-in Interlacer for 1080p in / 1080i out



RJ45 TO HDMI and DVI ADAPTER CABLES



ANALOG AUDIO CABLE

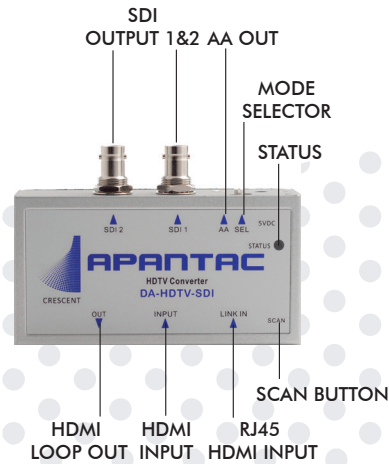


MODEL	DA-SDI-HDTV	SDI-HDTV-II	DA-HDTV-SDI
DESCRIPTION	SDI to HDMI/DVI Converter with 2 Looping Inputs 3G, 1080p, HDMI 1.3	Simple SDI to HDMI/DVI Converter	HDMI to SDI Converter with Looping Outputs 3G
INPUT	1 x SDI Data Rate: 125 Mbps to 2.97 Gbps	1 x SDI Data Rate: 125 Mbps to 2.97 Gbps	1 x HDMI, 1 x RJ45 (HDMI) Supports HDMI 1.3, up to 1080p
OUTPUT	RJ45 with HDMI or DVI Adapter HDMI 1.3 up to 1080p	HDMI Type A	2 x SDI (1080p, 1080i, 720p, 480i)
AUDIO	Passes through 16 channels of Embedded Audio	Selectable Stereo Analog Audio pair	Passes through 8 channels of Embedded Audio and Stereo Analog Audio via phone jack
POWER	5V DC	5V DC or USB	5V DC 3A
WEIGHT	1 lb (0.45 kg)	1 lb (0.45 kg)	1.2 lb (0.55 kg)
DIMENSIONS	62 mm W x 113 mm D x 29 mm H	62 mm W x 113 mm D x 29 mm H	62 mm W x 113 mm D x 40 mm H
MOUNT	Magnetic	Magnetic	Magnetic

SDI CONVERSIONS

SDI-CVBS-S


3G/HD/SD-SDI to Composite Converter with Scaler

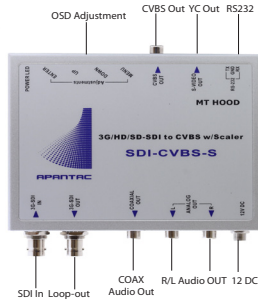

SDI-CVBS-S

SDI-CVBS

SDI to Composite Converter without Scaler

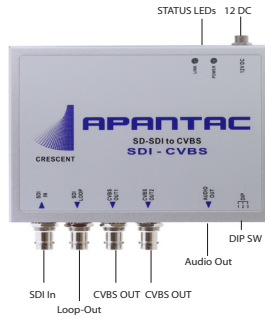

SDI-CVBS

CVBS-SDI

Composite to SDI Converter without Scaler



CVBS-SDI

MODEL	SDI-CVBS-S	SDI-CVBS	CVBS-SDI
DESCRIPTION	3G/HD/SD-SDI to CVBS Converter	SD-SDI to CVBS Converter	CVBS to SDI Converter
INPUTS	3G/HD/SD-SDI	SD-SDI	CVBS (PAL/NTSC), AA Audio
VIDEO OUTPUTS	SDI Loop-out, CVBS, YC	2 x CVBS	2 x SDI
AUDIO OUTPUTS	AA Stereo, Coax	AA Audio	SDI Embedded
ELECTRICAL	12V DC		
DIMENSIONS	117 mm W x 120 mm D x 25 mm H		