4x4 VGA Matrix Switcher with Audio & RS-232

High-resolution matrix with RS-232, IR and front panel control

MPN: VGA4X4SW

The KanexPro 4x4 VGA matrix switcher is designed to route high-resolution video signals from your computer or other video sources with stereo audio. The 15-pin HD connectors are convenient and cost-effective for all input/ output connections.
In addition to the eight 3.5mm stereo jacks for stereo audio the matrix comes with full RS-232, IR remote and front-panel control allowing operation from just one touch of a button for input/output selection.

FEATURES

- Switch any VGA source to any display with audio
- Full HD 1080p(1920x1080@60Hz)
- Stereo audio with 8 x 3.5mm jack
- EDID Compliant
- Control through RS-232, IR remote & front-panel buttons
- Front panel LEDs for input/output signal presence
- Rack mountable metal enclosure
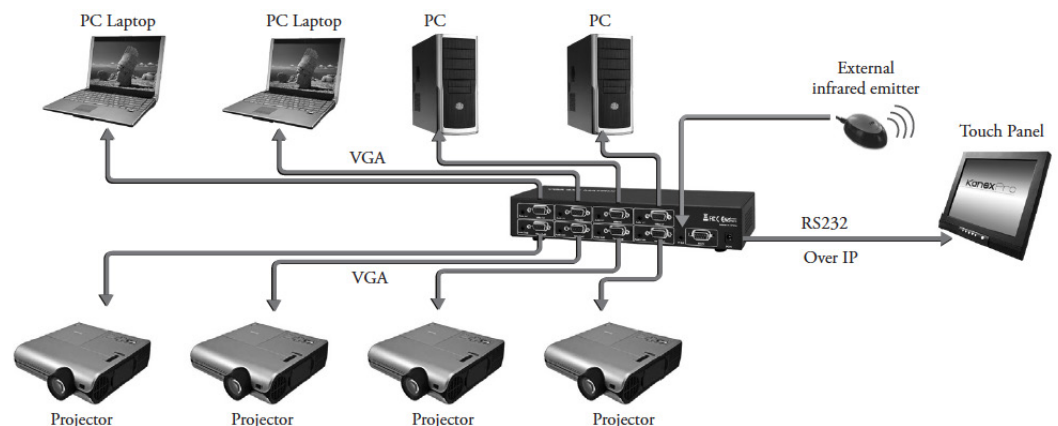- 5VDC external power supply included

SPECIFICATIONS

Interface
Input Transmitter
- VGA (15pin) x4 / RS232 Female x1 /
- 3.5mm Stereo x4
Output Receiver
- VGA (15 pin) x4 / 3.5mm Stereo x4 /
- IR Extender x1
- **Video Amplifier Bandwidth:** 500 MHz
- **Vertical Frequency Range:** 30-170Hz
- **Maximum Resolution:** 1920x1200 /1080p at 60Hz
- **Power Supply:** 5V DC@2A, 5W

- **Operating Temperature:** 0°C to +70°C
- **Operating Humidity:** 10% to 85 % RH (no condensation)
- **Storage Temperature:** -10°C to +80°C
- **Storage Humidity:** 5% to 90 % RH (no condensation)
- **Regulatory Approvals Converter:** FCC, CE, UL
- **Regulatory Approvals Power Supply:** FCC, CE, UL
- **Dimensions:** 10.5"x4.5"x1.7" (267x115x45mm)
- **Total Weight:** 2lbs (936g)
- **Warranty:** 1 Year parts and labor