

ME 67

Microphones | Back-Electret Microphone Head Suitable for K6 and K6P Powering Modules

Cat. No. 003285

General Description

The ME 67 is a long gun microphone head designed for use with the K6 and K6P powering modules. A highly directional microphone, it can be used where the microphone must be placed at a distance from the sound source. Matt black, anodised, scratch-resistant finish.



Pictured with K6 powering module and cable (available separately)

Features

- Lobar pick-up pattern
- Highly directional
- Very low inherent self-noise
- High sensitivity factor
- Wide frequency response
- Delivery includes: 1 ME 67



Recommended Accessories

- MZW 67 pro foam windshield

Cat. No. 003832

Technical Data

Pick-up pattern	lobar (long gun)
Frequency response	40 – 20,000 Hz ± 2.5 dB
Sensitivity (free field, no load) (1 kHz)	50 mV/Pa ± 2.5 dB
Nominal impedance	200 Ω (with K6)
Min. terminating impedance	1 kΩ (with K6)
Equivalent noise level	
A-weighted (DIN IEC 651)	10 dB
CCIR-weighted (CCIR 468-3)	21 dB
Max. SPL (1 kHz)	126 dB (THD = 1 %)
Dimensions	∅ 22.5 x 343 mm
Weight	100 g

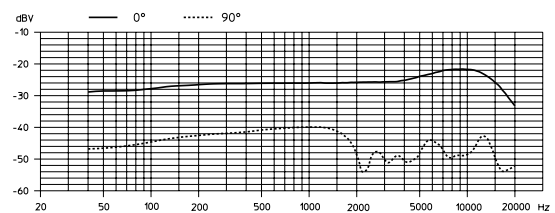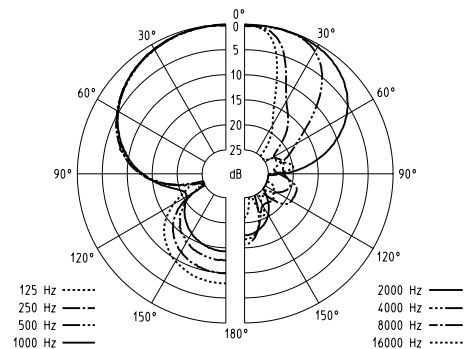

Profile

Lobar (long gun) microphone head suitable for K6 and K6P powering modules. Frequency response 50 Hz – 20,000 Hz ± 2.5 dB, sensitivity (free field, no load) 50 mV/Pa ± 2.5 dB at 1 kHz, nominal impedance 200 Ω (with K6), min. terminating impedance 1 kΩ (with K6), equivalent noise level A-weighted 10 dB, CCIR-weighted 21 dB, max. SPL 126 dB at 1 kHz (THD = 1 %), dimensions ∅ 22.5 x 343 mm, weight 100 g.