



DVI HDBaseT-Lite Extender with POH

VE601

User Manual



EMC Information

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE

STATEMENT: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

CE Warning: This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Suggestion: Shielded twisted pair (STP) cables must be used with the unit to ensure compliance with FCC & CE standards.

RoHS

This product is RoHS compliant.

SJ/T 11364-2006

The following contains information that relates to China.

部件名称	有毒有害物质或元素					
	铅	汞	镉	六价铬	多溴联苯	多溴二苯醚
电器部件	●	○	○	○	○	○
机构部件	○	○	○	○	○	○

- : 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T 11363-2006规定的限量要求之下。
- : 表示符合欧盟的豁免条款，但该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006的限量要求。
- ×: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006的限量要求。



User Information

Online Registration

Be sure to register your product at our online support center:

International	http://eservice.aten.com
---------------	---

Telephone Support

For telephone support, call this number:

International	886-2-8692-6959
China	86-10-5255-0110
Japan	81-3-5615-5811
Korea	82-2-467-6789
North America	1-888-999-ATEN ext 4988
United Kingdom	44-8-4481-58923

User Notice

All information, documentation, and specifications contained in this manual are subject to change without prior notification by the manufacturer. The manufacturer makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties as to merchantability or fitness for any particular purpose. Any of the manufacturer's software described in this manual is sold or licensed *as is*. Should the programs prove defective following their purchase, the buyer (and not the manufacturer, its distributor, or its dealer), assumes the entire cost of all necessary servicing, repair and any incidental or consequential damages resulting from any defect in the software.

The manufacturer of this system is not responsible for any radio and/or TV interference caused by unauthorized modifications to this device. It is the responsibility of the user to correct such interference.

The manufacturer is not responsible for any damage incurred in the operation of this system if the correct operational voltage setting was not selected prior to operation. PLEASE VERIFY THAT THE VOLTAGE SETTING IS CORRECT BEFORE USE.

Package Contents

VE601 Package Contents

- 1 VE601T/R DVI HDBaseT-Lite Extender with POH
- 1 Power Adapter
- 1 IR Transmitter
- 1 IR Receiver
- 2 Terminal Blocks
- 1 User Instructions

VE601T Package Contents

- 1 VE601T DVI HDBaseT-Lite Extender with POH
- 1 Power Adapter
- 1 IR Transmitter
- 1 Terminal Block
- 1 User Instructions

VE601R Package Contents

- 1 VE601R DVI HDBaseT-Lite Extender with POH
- 1 Power Adapter
- 1 IR Receiver
- 1 Terminal Block
- 1 User Instructions
- 1 Power Adaptor

Check to make sure that all the components are present and that nothing got damaged in shipping. If you encounter a problem, contact your dealer.

Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit, and/or any of the devices connected to it.

Note: Features may have been added to the VE601 since this manual was published. Please visit our website to download the most up-to-date version of the manual.

© Copyright 2015 ATEN® International Co., Ltd.
Manual Date: 2015-10-30

ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved.
All other brand names and trademarks are the registered property of their respective owners.

Contents

EMC Information	ii
RoHS.	ii
SJ/T 11364-2006.	ii
User Information	iii
Online Registration	iii
Telephone Support	iii
User Notice	iii
Package Contents.	iv
VE601 Package Contents	iv
VE601T Package Contents	iv
VE601R Package Contents.	iv
About this Manual	vi
Conventions	vii
Product Information.	vii

Chapter 1.

Introduction

Overview	1
Features	2
Requirements	3
Display.	3
Source Device	3
Cables	3
Components	4

Chapter 2.

Hardware Setup

Setting Up	7
Installation Diagram.	8
RS-232 Channel Transmission	9

Chapter 3.

Operation

LED Display	11
VE802T (Transmitter) and VE601R (Receiver).	11

Appendix

Safety Instructions.	13
General	13
Technical Support	15
International.	15
North America	15
Specifications	16
Limited Warranty.	17

About this Manual

This User Manual is provided to help you get the most from your system. It covers all aspects of installation, configuration and operation. An overview of the information found in the manual is provided below.

Chapter 1, Introduction, introduces you to the VE601 system. Its purpose, features and benefits are presented, and its front and back panel components are described.

Chapter 2, Hardware Setup, describes the steps that are necessary to quickly and safely set up your installation.

Chapter 3, Operation, explains the fundamental concepts involved in operating the VE601

An Appendix, provides specifications and other technical information regarding the VE601.

Conventions

This manual uses the following conventions:

- Monospaced Indicates text that you should key in.
- [] Indicates keys you should press. For example, [Enter] means to press the **Enter** key. If keys need to be chorded, they appear together in the same bracket with a plus sign between them: [Ctrl+Alt].
1. Numbered lists represent procedures with sequential steps.
- ◆ Bullet lists provide information, but do not involve sequential steps.
- Indicates selecting the option (on a menu or dialog box, for example), that comes next. For example, Start → Run means to open the *Start* menu, and then select *Run*.
-  Indicates critical information.

Product Information

For information about all ATEN products and how they can help you connect without limits, visit ATEN on the Web or contact an ATEN Authorized Reseller. Visit ATEN on the Web for a list of locations and telephone numbers:

International	http://www.aten.com
North America	http://www.aten-usa.com

Chapter 1

Introduction

Overview

The VE601 DVI HDBaseT-Lite Extender is able to extend a DVI 1080p display up to 70 m using a Cat 5e/6 cable. This combination of ATEN and HDBaseT technology even supports sharing 1920 x 1200 media up to 40 m away, offering a simple, adaptable, and cost-effective solution for any professional A/V installation.

The VE601 DVI HDBaseT-Lite Extender is the perfect solution for professional A/V installations that require video signal interference protection, such as in medical and military installations. With its lightweight and easy-to-mount design, not to mention slip-resistant DC Jack lock mechanism, the VE601 can be installed nearly anywhere while ensuring peace of mind with its unerring reliability.

Features

- ♦ HDBaseT Connectivity – extends a DVI connection up to 70 meters via a single Cat 5e/6 cable
- ♦ Superior Video Quality – Support up to 1080p/60@36bits and 3D HDMI signals up to 70m over Cat 6a cable
- ♦ Wide Screen Formats Supported – Supports new popular wide screen formats
- ♦ DVI to HDMI Conversion Supported – VE601T to VE801R or VE801T to VE601R (audio conversion not supported)
- ♦ Supports 2 Ch Stereo Audio Natively – LPCM 7.1 Ch, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio available through HDMI to DVI connector
- ♦ HDCP Compliant – ensures display of content-protected media and interoperability with other HDCP-compliant devices
- ♦ HDBaseT Anti-Jamming – resists signal interference during video transmission using HDBaseT technology
- ♦ EDID Expert – configures optimum EDID settings for smooth power-up, high-quality display and use of the best resolution across different screens
- ♦ POH (Power over HDBaseT) – supplies power from Transmitter to Receiver over a long distance via one Cat 5e/6a cable
- ♦ ESD Protection – built-in 8KV/15KV ESD protection (for contact voltage of 8KV and air voltage of 15KV)
- ♦ A bi-directional RS-232 serial port to connect with a high-end system for more device control
- ♦ A bi-directional IR channel for IR signal control; IR transmission is processed one way at a time
- ♦ Uses One Cat 5/6 Cable to Connect Local and Remote Units – reduces cable bulk and provides a faster, more reliable data connection, while also taking advantage of the existing wiring system in most modern office buildings
- ♦ No Software Required – eliminates incompatibility and installation issues as well as the need to spend time configuring software
- ♦ Easy Installation Rack Mounting Kit – safely and quickly install the unit by yourself
- ♦ Rack-Mountable

Requirements

Display

- ♦ An DVI display capable of the highest required resolution

Source Device

The following equipment is required:

- ♦ A source device with an DVI port

Cables

- ♦ Cat 5e cable is required to connect the Transmitter and Receiver units. Cable of a lower standard will result in degrading the video signal. We strongly recommend using Cat 5e cables or above.
- ♦ For better quality over longer distances, we suggest using 2L – 2801 (350 MHz) Low Skew Cable.


Maximum Cable Distances

Connection	Distance
Computer to Transmitter (VE802T)	1.8 m
Transmitter (VE802T) to Receiver (VE802R)	70 m*
Receiver (VE802R) to monitor	1.8 m


Note:* 70m is the maximum cable distance when using a Cat 6a or above cable.

Components

VE601T Front View

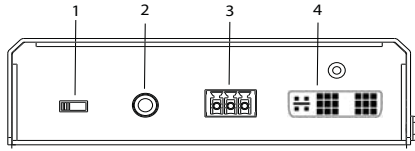


VE601T Rear View

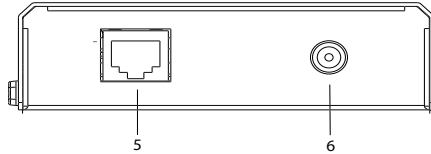


No.	Component	Description
1	F/W Upgrade Switch	The Firmware upgrade port is reserved for tech support. If you would like to do a firmware upgrade yourself, please contact your dealer.
2	IR Port	Connect an IR Transmitter to the IR port on the VE601T.
3	RS-232 Port	You can connect the RS-232 main controller to the VE601, such as the PC or Control system.
4	DVI Input Port	Connect the DVI Input Port on the VE601T to the DVI Output Port on the video source device using an DVI cable.
5	HDBaseT Output Port	The Cat 5e cables that connects the Receiver Units, plug in here.
6	Locking Power Jack	The cable from the Power adapter connects here.

See Chapter 3, Operation for details.


VE601T Top View



VE601R Front View




VE601R Rear View

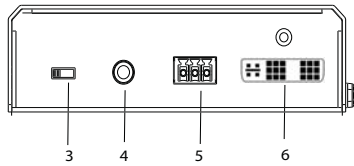

No.	Component	Description
1	HDBaseT Input Port	The Cat 5e cables that connects to the Transmitter Unit plugs in here.
2	Locking Power Jack	The cable from the Power adapter connects here.
3	F/W Upgrade Switch	The Firmware upgrade port is reserved for tech support. If you would like to do a firmware upgrade yourself, please contact your dealer.
4	IR Port	Connect an IR Receiver to the IR port on the VE601R.
5	RS-232 Port	You can connect RS-232 serial devices/ peripherals to the VE601, such as touchscreens and bar code scanners.
6	DVI Output Port	Connect the DVI display to this port.

VE601R Top View



See Chapter 3, Operation for details.

This Page Intentionally Left Blank

Chapter 2

Hardware Setup




1. Important safety information is provided on page 13. Please review it before proceeding.
2. Make sure that the power to all devices connected to the installation are turned off. You must unplug the power cords of any computers that have the Keyboard Power On function.

Setting Up

Setting up the VE601 HDBaseT-Lite Extender system is simply a matter of plugging in the cables. Make sure that all the equipment to be connected are powered off, then refer to the installation diagram on the next page and do the following:

1. Connect the DVI Input Port on the VE601T to the DVI Output Port on your video source device using DVI cable.
2. Connect one end of the RJ-45 cable to the HDBaseT output port on the transmitter. Then connect the other end of the RJ-45 cable to the HDBaseT input port on the receiver.
3. Connect the DVI Output Port on the VE601R to the DVI Input Port on your video display device using DVI Cable.
4. Plug the power adaptor into the power jack on the VE601T.
(Optional) Plug the power adapter into the Power Jack on the VE601R if necessary.
5. (Optional) Connect you computer or controller system to the terminal block on the VE601 to serial commands
6. (Optional) Connect an IR Transmitter/Receiver to the IR port on the VE601T/VE601R.


Installation Diagram

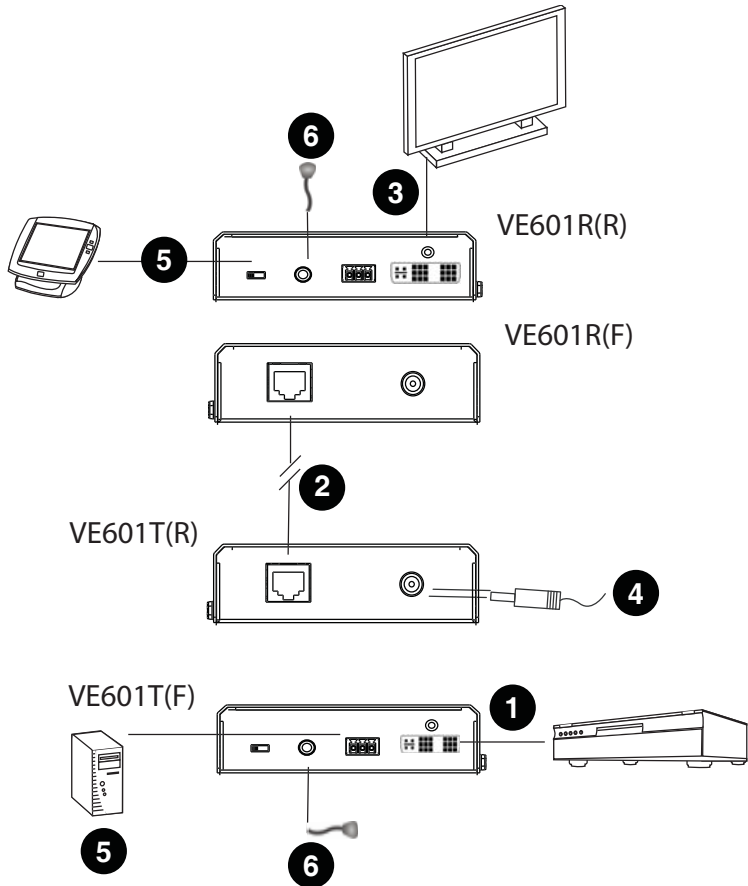

RS-232 Channel Transmission

You can connect RS-232 serial devices/peripherals to the VE601, such as touchscreens and bar code scanners. The RS-232 signal transmission flow is shown in the following example:

From a source device, the RS-232 signal is transmitted (Tx) to the VE601T receiving (Rx) unit; the VE601R transmits (Tx) signals to the display device (Rx).

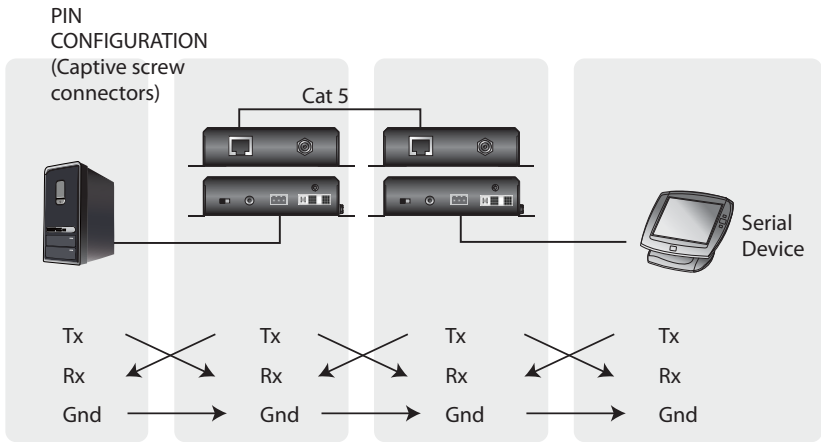

This Page Intentionally Left Blank

Chapter 3

Operation

LED Display

The VE802 Transmitter and Receiver units have front panel LEDs to indicate their operating status, as shown in the tables, following:

VE802T (Transmitter) and VE601R (Receiver)

LED	Indication
Power (Green)	Lights to indicate that the system is receiving power.
Link (Orange)	♦ Light is static to indicate that the connection to the Transmitter and Receiver units are ok. ♦ Flashes when there is a problem with the connection.
DVI Out*	♦ Light is static DVI display is normal with HDCP key. ♦ Flashes when DVI display is normal without HDCP key. ♦ OFF when there is no DVI Signal.

Note: *DVI Out LED VE601R only.

This Page Intentionally Left Blank

Appendix

Safety Instructions

General

- ♦ Read all of these instructions. Save them for future reference.
- ♦ Follow all warnings and instructions marked on the device.
- ♦ This product is for indoor use only.
- ♦ Do not place the device on any unstable surface (cart, stand, table, etc.). If the device falls, serious damage will result.
- ♦ Do not use the device near water.
- ♦ Do not place the device near, or over, radiators or heat registers.
- ♦ The device cabinet is provided with slots and openings to allow for adequate ventilation. To ensure reliable operation, and to protect against overheating, these openings must never be blocked or covered.
- ♦ The device should never be placed on a soft surface (bed, sofa, rug, etc.) as this will block its ventilation openings. Likewise, the device should not be placed in a built in enclosure unless adequate ventilation has been provided.
- ♦ Never spill liquid of any kind on the device.
- ♦ Unplug the device from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- ♦ The device should be operated from the type of power source indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
- ♦ The device is designed for IT power distribution systems with 230V phase-to-phase voltage.
- ♦ To prevent damage to your installation, it is important that all devices are properly grounded.
- ♦ The device is equipped with a 3-wire grounding type plug. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not attempt to defeat the purpose of the grounding-type plug. Always follow your local/national wiring codes.
- ♦ Do not allow anything to rest on the power cord or cables. Route the power cord and cables so that they cannot be stepped on or tripped over.

- ♦ If an extension cord is used with this device make sure that the total of the ampere ratings of all products used on this cord does not exceed the extension cord ampere rating. Make sure that the total of all products plugged into the wall outlet does not exceed 15 amperes.
- ♦ To help protect your system from sudden, transient increases and decreases in electrical power, use a surge suppressor, line conditioner, or un-interruptible power supply (UPS).
- ♦ Position system cables and power cables carefully; Be sure that nothing rests on any cables.
- ♦ Never push objects of any kind into or through cabinet slots. They may touch dangerous voltage points or short out parts resulting in a risk of fire or electrical shock.
- ♦ Do not attempt to service the device yourself. Refer all servicing to qualified service personnel.
- ♦ If the following conditions occur, unplug the device from the wall outlet and bring it to qualified service personnel for repair.
 - ♦ The power cord or plug has become damaged or frayed.
 - ♦ Liquid has been spilled into the device.
 - ♦ The device has been exposed to rain or water.
 - ♦ The device has been dropped, or the cabinet has been damaged.
 - ♦ The device exhibits a distinct change in performance, indicating a need for service.
 - ♦ The device does not operate normally when the operating instructions are followed.
- ♦ Only adjust those controls that are covered in the operating instructions. Improper adjustment of other controls may result in damage that will require extensive work by a qualified technician to repair.
- ♦ This product is for indoor use only.

Technical Support

International

- ♦ For online technical support – including troubleshooting, documentation, and software updates: **<http://eservice.aten.com>**
- ♦ For telephone support, *Telephone Support*, page iii

North America

Email Support		support@aten-usa.com
Online Technical Support	Troubleshooting Documentation Software Updates	http://www.aten-usa.com/support
Telephone Support		1-888-999-ATEN ext 4988

When you contact us, please have the following information ready beforehand:

- ♦ Product model number, serial number, and date of purchase.
- ♦ Your computer configuration, including operating system, revision level, expansion cards, and software.
- ♦ Any error messages displayed at the time the error occurred.
- ♦ The sequence of operations that led up to the error.
- ♦ Any other information you feel may be of help.

Specifications

Function			VE601
Video Input	Interface		1 x DVI Type A Female (Black)
	Impedance		100Ω
	Max distance		1.8m
Video Output	Interface		1 x DVI Type A Female (Black)
	Impedance		100Ω
Video	Max. data rate		10.2Gbps (3.4Gbps per lane)
	Max. pixel clock		340 MHz
	Compliance		DVI (3D, Deep Color) HDCP Compatible Consumer Electronics Control (CEC)
	Max resolutions/ Distance		Up to 1920 x 1200 @35 m (Cat 5e/6) / 40 m (Cat 6a); 1080p@60 m (Cat 5e/6) / 70 m (Cat 6a)
Audio	Input		1 x Mini Stereo Jack Female (Black)
	Output		1 x Mini Stereo Jack Female (Black)
Control	RS-232	Connector	1x Terminal Block, 3 pole
		Baud rate and protocol	Baud Rate: 19200, Data Bits:8, Stop Bits:1, no parity and flow control
	IR		1 x Mini Stereo Jack Female (Black)
Power	Connector		1 x DC Jack (Black)
	Consumption		VE601T: DC5V,3.6W; VE601R: DC5V,4W
Environment	Operating temp.		0-50°C
	Storage temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		VE601T: 0.25 kg VE601R: 0.25 kg
	Dimensions (LxWxH)		VE601T: 10.3 x 8.7 x 3 cm VE601R: 10.3 x 8.7 x 3 cm

Limited Warranty

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DISK, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the device or documentation without obligation to notify any individual or entity of such revisions, or update. For further inquiries, please contact your direct vendor.