Installation and Assembly - DVD/DVR/VCR Mount for Jumbo® Mount


Models: VPM 25-J, VPM 25-JS, SVPM 25-J, SVPM 25-JS

Maximum Load Capacity: 50 lb (22.7 kg)

Read instruction sheet before you start installation and assembly.


Installing a DVD/DVR/VCR Mount to a Jumbo® Mount with Threaded Holes in Center of Tray page 3
Installing a DVD/DVR/VCR Mount to a Jumbo Mount with Slots in Center of Tray page 3
Installing a Single DVD/DVR/VCR Mount
Installing Multiple DVD/DVR/VCR Mounts

INSIDE DIM	ENSIONS	MEDIA PLAYER DIMENSIONS		
WIDTH (W)	HEIGHT (H)	MAXIMUM	MINIMUM	
13.25" - 17.25"	1.5" - 2.75"	17.25" x 2.50"	13.25" x 1.5"	
(337 mm - 438 mm)	(38 mm - 70 mm)	(438 mm x 64 mm)	(337 mm x 38 mm)	

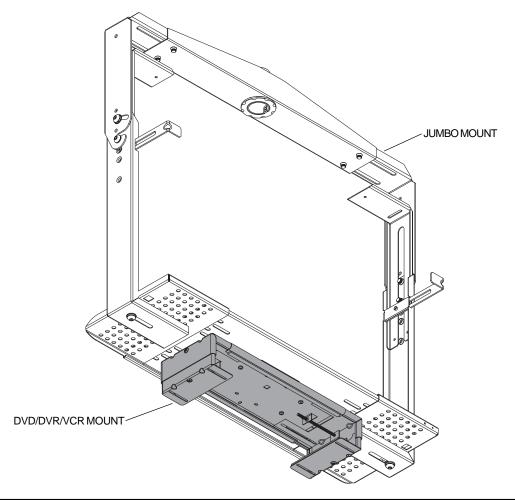


1 of 5

Parts List		VPM 25-J	VPM 25-JS	SVPM 25-J	SVPM 25-JS
Description	Qty.	Part	Part	Part	Part
A DVD/DVR/DVR mount	1	081-0072	081-0076	081-0073	081-0077
B hanger bracket	1	1255-275	081-4086	1255-275	081-4086
C M5 x .8 x 8 mm self-tapping phillips screw	8	520-1167	520-2167	520-1167	520-2167
D #10-24 x 1/2" carriage bolt	8	520-9523	520-2104	520-9523	520-2104
E #10-24 nylock nut	8	530-9341	530-9342	530-9341	530-9342
F #10 SAE washer	8	540-9400	540-9442	540-9400	540-9442
G M5 x 1" penta-pin™ tool driver	1	_	_	520-9249	520-9249
H 1.5" x 4.5" x .125" adhesive foam	2	599-1122	599-1122	599-1122	599-1122
I .375" x 12.75" x .125" adhesive foam	2	599-3802	599-3802	599-3802	599-3802

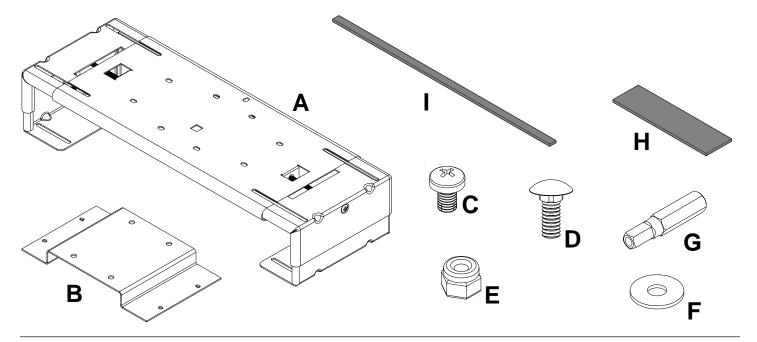


Peel and place four pieces of adhesive foam (**H**, **I**) on the horizontal cross support and vertical adjusters as shown in figure 1.1 and 1.2.

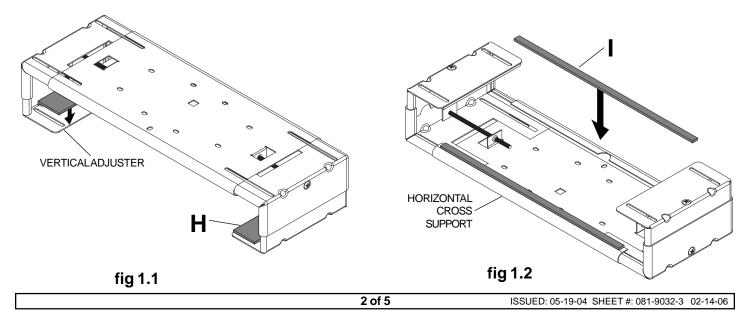


Installing a DVD/DVR/VCR Mount to a Jumbo® Mount with Threaded Holes in Center of Tray

Attach hanger bracket (**B**) underneath the Jumbo mount using four M5 x 8 mm screws (**C**) as in shown figure 2.1. Attach DVD/DVR/VCR mount (**A**) to hanger bracket (**B**) using four M5 x 8 mm screws (**C**) as in shown figure 2.2.

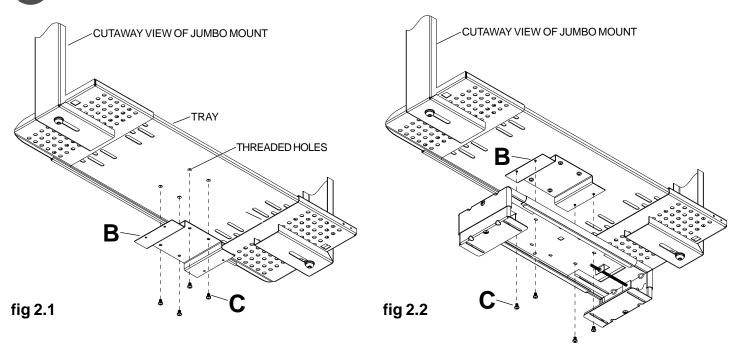

Installing a DVD/DVR/VCR Mount to a Jumbo Mount with Slots in Center of Tray

Attach hanger bracket (**B**) underneath the Jumbo mount using four #10-24 carriage bolts (**D**), #10 SAE washers (**F**), and #10-24 nylock nuts (**E**) as shown in figure 3.1. Attach DVD/DVR/VCR mount (**A**) to hanger bracket (**B**) using M5 x 8 mm screws (**C**) as shown in figure 3.2.

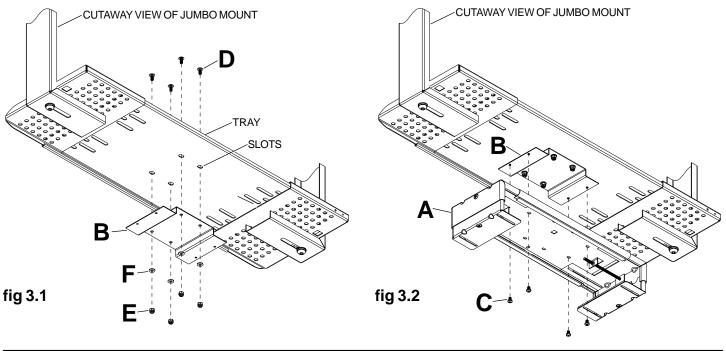


3 of 5

ISSUED: 05-19-04 SHEET #: 081-9032-3 02-14-06

Installing a Single DVD/DVR/VCR Mount



Adjust size of DVD/DVR/VCR mount (**A**) to fit media player by loosening vertical and horizontal adjustment screws where shown in figure 4.1 on both sides. Insert media player and align front of player with front of TV on Jumbo mount. Tighten vertical and horizontal adjustment screws where shown in figure 4.2 on both sides until player securely fits in mount.

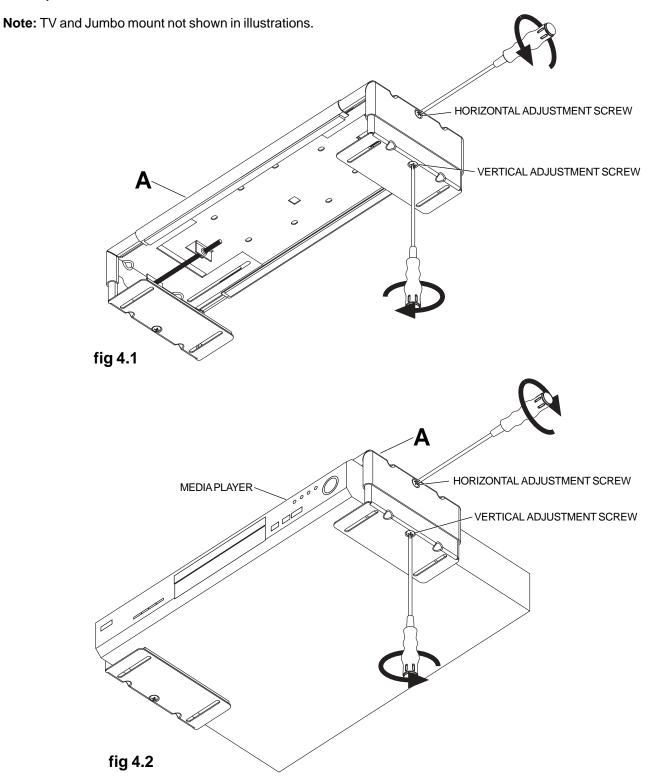

Installing Multiple DVD/DVR/VCR Mounts




If adhesive foam (**H**) is covering slots, trim foam (**H**) to expose slots. Insert four carriage bolts (**D**) into slots of upper DVD mount (**A**). Loosely attach lower DVD mount (**A**) using four #10 SAE washers (**F**) and #10-24 nylock nuts (**E**). This will allow access to the vertical adjustment screws of the upper mount by being able to easily move the lower mount. **Note**: TV and TV mount not shown in illustrations.

A WARNING

 Do not stack more than three DVD/DVR/VCR Mounts from a TV mount.

A WARNING

Stacked load cannot exceed 50 lb.

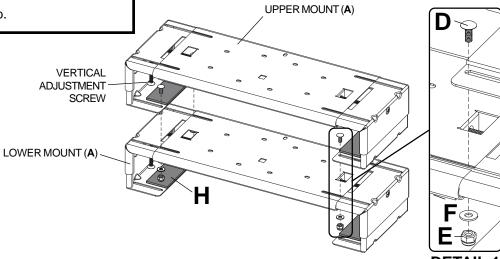


4

Adjust size of the upper DVD mount (**A**) to fit media player by loosening screws on both sides. Insert media player and align front of player with front of TV on TV mount. Tighten vertical and horizontal adjustment screws where shown on both sides until player securely fits in mount.

Note: To access the vertical adjustment screws of the upper mount, slide the lower mount to the side. Repeat for the opposite side.

Center lower DVD mount (A) and securely tighten four nuts (E). Repeat beginning of this step to install the media player into the lower DVD mount.

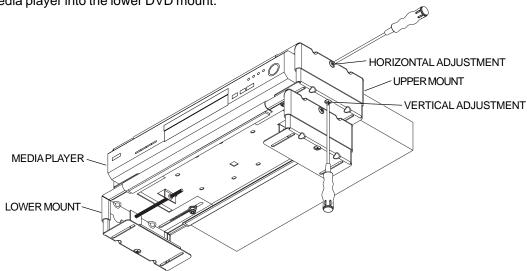

5 of 5

ISSUED: 05-19-04 SHEET #: 081-9032-3 02-14-06