

What's in the Box?

PART NO.	QTY	DESCRIPTION
VS2P	1	WUXGA 2-Port Splitter
Power Supply	1	PS5VDC2A
User Manual	1	

Technical Specifications

VIDEO	
Format	VGA RGB Analog (75Ω, 0.7Vp-p)
Resolution	Up to 1600x1200 @ 85Hz/2048x1536 @ 60Hz
Input Interface	(1) HD-15 Male
Output Interface	(2) HD-15 Female
H Frequency Range	30-95KHz
V Frequency Range	50-180Hz
OTHER	
DDC Signal	5 Volts [peak-to-peak], TTL
TDMS Signal	1.2 Volts[peak-to-peak], TTL
Power	External 5VDC2A
Dimensions	5.325"W x 1"H x 3"D
Weight	0.25 lbs.
Approvals	Device: CE, ROHS Power Supply: C-UL US, CE

© Copyright 2017 Smart-AVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

Installation Manual

VS2P 2-Port Video WUXGA Splitter



**Connect One VGA Output Signal
to Two Displays**

Rack Mountable Option



Our SmartRack is the perfect solution to allow virtually all SmartAVI devices to be custom mounted in a standard 19" server rack. The SmartRack is fully adjustable and can secure/organize several devices.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

www.smartavi.com

Introduction

The VS2P is a 2-port WUXGA splitter that allows a computer to display one VGA video signal on two monitors simultaneously.


Features

- Split WUXGA signal into two outputs
- Resolutions up to 1600x1200 @ 85Hz and up to 2048x1536 @ 60Hz
- Easy installation
- 300 MHz Bandwidth
- Compact metal enclosure

Applications

- Home Theater Integration
- Restaurants and Bars
- Digital Signage Deployment
- Information Kiosks/Displays
- Film/Recording Studios

Product - Installation Diagram

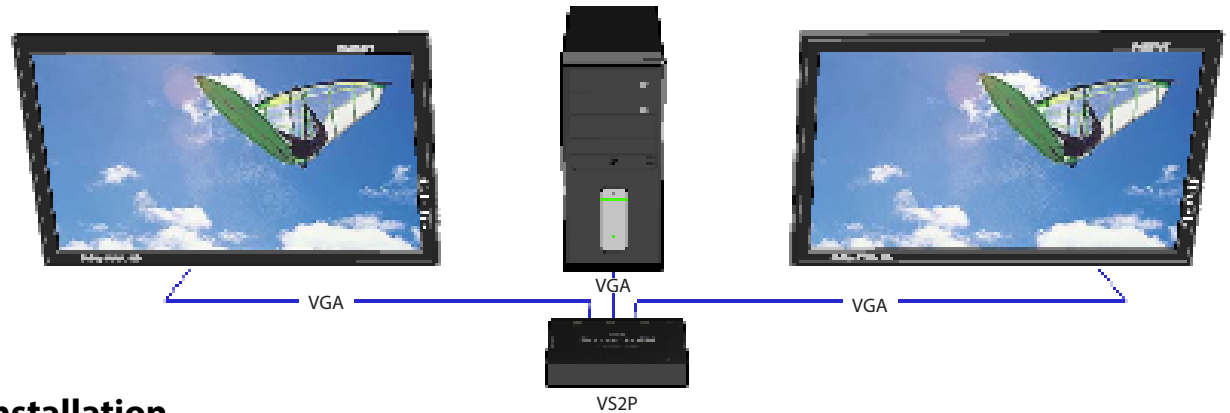

Installation

1. Turn off the computer and the displays.
2. Connect an VGA cable from the computer to the input port on the VS2P.
3. Connect the displays to the VGA outputs on the VS2P.
4. Connect the power cord to the VS2P.
5. Power on the computer and the displays.

