Tensioned Large Cosmopolitan® Electrol®

Automatic Electric Projection Screen Model



| SUGGESTED SPECIFICATIONS: | projection screen(s), |
|---|---|
| (H) x(W), electrica | illy operated 120 volt (60Hz) not more |
| than 2.4 amp. Shall have specially designed | ed motor mounted inside the roller, to |
| be three wire with ground quick reversal | type, oiled for life, with automatic |
| thermal overload cut-out, integral gears, o | capacitor and an electric brake to |
| prevent coasting. To have pre-set but adju | ustable limit switches to automatically |
| stop picture surface in the "up" and "down | n" positions. The roller to be of |
| aluminum. Screen fabric to be flame retar | dant and mildew resistant vinyl with |
| black masking borders standard. Each sig | de of fabric to have a tab quide cable |

system to maintain even lateral tension and hold surface flat. Bottom of fabric to be inserted into a custom aluminum slat bar with added weight to provide vertical tension on the screen surface. The ends of the slat to be protected by heavy duty plastic caps enclosing a preset adjustable mechanism for screen tensioning. Case to be a two-piece design made of extruded aluminum with a white, lightly textured powder coat finish. Screen to include a three-position control switch and cover plate. Screen to be listed by Underwriters' Laboratories.

HDTV (16:9) Format Dimensions

| Viewing Area (H x W) | | Nominal Diagonal | | Overall Length of Case | | Approx. Ship. Wt. | |
|----------------------|-----------|------------------|-----|------------------------|-----|-------------------|-------|
| In. | Cm | In. | Cm | In. | Cm | Lbs. | Kg |
| 92" x 164" | 234 x 417 | 188" | 478 | 186" | 472 | 240 | 108.9 |
| 108" x 192" | 274 x 488 | 220" | 559 | 215½" | 547 | 305 | 138.3 |

Wide (16:10) Format Dimensions

| Viewing Area (H x W) | | Nominal Diagonal | | Overall Length of Case | | Approx. Ship. Wt. | |
|----------------------|--------------|------------------|-----|------------------------|-----|-------------------|-------|
| In. | Cm | In. | Cm | In. | Cm | Lbs. | Kg |
| 100" x 16 | 0" 254 x 406 | 189" | 480 | 182½" | 464 | 225 | 102.1 |
| 110" x 170 | 5" 279 x 447 | 208" | 528 | 199¾" | 507 | 260 | 117.9 |
| 120" x 19 | 2" 305 x 488 | 226" | 574 | 217" | 551 | 309 | 140.2 |

Video (NTSC 4:3) Format Dimensions

| Viewing Area (H x W) | | Nominal Diagonal | | Overall Length of Case | | Approx. Ship. Wt. | |
|----------------------|-----------|------------------|-----|------------------------|-----|-------------------|-------|
| ln. | Cm | In. | Cm | In. | Cm | Lbs. | Kg |
| 108" x 144" | 274 x 366 | 180" | 457 | 167½" | 425 | 205 | 92.9 |
| 120" x 160" | 305 x 406 | 200" | 508 | 185" | 470 | 240 | 108.9 |
| 126" x 168" | 320 x 427 | 210" | 533 | 194" | 493 | 250 | 113.4 |
| 132" x 176" | 335 x 447 | 220" | 559 | 203" | 516 | 260 | 117.9 |
| 144" x 192" | 366 x 488 | 240" | 610 | 220½" | 560 | 309 | 140.2 |

PRODUCT NOTES

- · All viewing surfaces will be seamless.
- All viewing surfaces are standard with black backing except for Da-Tex® and Dual Vision.
- · All screens standard with 12" black drop at the top.
- Extra drop may alter case dimensions. Contact Da-Lite for details
- Overall case length dimensions +/- 1/4" (6mm).
- Detail dimensional drawings, wiring diagrams and installation instructions available upon request.
- · Specifications subject to change without notice.
- · Custom formats and sizes available upon request.

WHEN ORDERING, MARK APPROPRIATE SELECTIONS

1. Select size from charts on the other side.

2. Select viewing surface (All Da-Lite surfaces are GREENGUARD GOLD Certified.):

O HD Progressive 0.6 O Da-Mat®

O HD Progressive 0.9 O High Contrast Da-Mat®

O HD Progressive 1.1 O Da-Tex® (Rear)

O HD Progressive 1.1 Contrast O Dual Vision
O HD Progressive 1.3

3. Options:

☐ Single Motor Low Voltage Control ☐ Black case (white standard).

System (LVC) - built-in.

220 Volt (50 Hz) Motor.

4. Optional accessories:

Single Motor Low Voltage Control System (LVC) – external.

☐ Wireless Remote Control for LVC.

☐ Radio Frequency Remote.

Radio Frequency Range Extender available

☐ Infrared Remote.

☐ Key Locking Cover Plate for 120V or LVC Switch.


☐ Key Operated Switch for 120V only (NOTE: Cannot be used with LVC).


☐ Video Projector Interface Control – external.

☐ External SCB-100 - RS-232 Serial Control Board.

☐ NET-100 Ethernet-Serial Adapter.

PRODUCT VIEWS

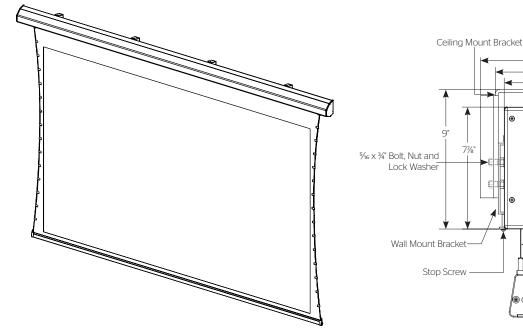



DA-LITE

A BRAND OF MILESTONE AV TECHNOLOGIES

www.milestone.com

P 800.622.3737 / 574.267.8101

F 877.325.4832 / 574.267.7804

E info@da-lite.com

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2017 Milestone AV Technologies. DL-0195 (Rev. 3) 12.17.
Da-Lite is a registered trademarks of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

| Project Name: | | | | |
|---------------|--------|--|--|--|
| Architect: | Phone: | | | |
| Contractor: | Phone: | | | |
| Supervisor: | Phone: | | | |
| Supplier: | Date: | | | |
| Revised: | | | | |