



## evolution wireless G4

ew 100 G4-835-S | ew 100 G4-845-S |  
ew 100 G4-865-S | Vocal Set



Versatile wireless systems for those who sing, speak or play instruments with up to 42 MHz tuning bandwidth in a stable UHF range and fast, simultaneous setup of up to 12 linked systems.

State-of-the-art live sound featuring Sennheiser's renowned e 835, e 845 and e 865 capsules on a lightweight aluminum transmitter with integrated mute switch.

### FEATURES

- Engineered for professional live sound: Rugged all-in-one wireless system for singers and presenters.
- State-of-the-art live sound featuring Sennheiser's renowned e 835, e 845, e 865, e 935, e 945 capsules on a lightweight aluminium transmitter with integrated mute switch
- True diversity half-rack receiver in a full-metal housing with intuitive LCD display for full control
- Easy and flexible wireless synchronization between transmitter and receiver via infrared
- Fast frequency allocation for up to 12 receivers via new linking functionality
- Up to 20 compatible channels
- Up to 42 MHz bandwidth with 1680 selectable frequencies, fully tunable in a stable UHF range
- Transmission Range: up to 100 meters / 300 feet
- High RF output power (up to 30 mW) depending on country regulations

### DELIVERY INCLUDES

- EM 100 G4 true diversity receiver
- SKM 100 G4-S handheld transmitter
- MMD 835-1 microphone head (835-S variants only)
- MMD 845-1 microphone head (845-S variants only)
- MME 865-1 microphone head (865-S variants only)
- GA 3 rackmount set
- MZQ 1 microphone clamp
- power supply
- 2 AA batteries
- 2 rod antennas
- RJ 10 cable
- quick guide
- safety guide
- manufacturer declaration sheet
- frequency supplement sheet



# evolution wireless G4

ew 100 G4-835-S | ew 100 G4-845-S |

ew 100 G4-865-S | Vocal Set

## SPECIFICATIONS

### EM 100 G4

#### RF characteristics


Modulation	Wideband FM
Frequency ranges	A1: 470 - 516 MHz A: 516 - 558 MHz AS: 520 - 558 MHz G: 566 - 608 MHz GB: 606 - 648 MHz B: 626 - 668 MHz C: 734 - 776 MHz D: 780 - 822 MHz E: 823 - 865 MHz JB: 806 - 810 MHz K+: 925 - 937.5 MHz 1G8: 1785 - 1800 MHz
Receiving frequencies	Max. 1680 receiving frequencies, adjustable in 25 kHz steps  20 frequency banks, each with up to 12 factory-preset channels, no intermodulation  1 frequency bank with up to 12 programmable channels
Switching bandwidth	up to 42 MHz
Nominal/peak deviation	$\pm 24$ kHz / $\pm 48$ kHz
Receiver principle	True diversity
Sensitivity (with HDX, peak deviation)	$< 2.5 \mu\text{V}$ for 52 dBA <sub>eff S/N</sub>
Adjacent channel selection	Typically $\geq 65$ dB
Intermodulation attenuation	Typically $\geq 65$ dB
Blocking	$\geq 70$ dB

Squelch	low: 5 dB $\mu\text{V}$ middle: 15 dB $\mu\text{V}$ high: 25 dB $\mu\text{V}$
Pilot tone squelch	Can be switched off
Antenna inputs	2 BNC sockets

#### AF characteristics

Compander system	Sennheiser HDX
EQ presets (switchable, act on line and monitor outputs)	Preset 1: Flat Preset 2: Low Cut (-3 dB at 180 Hz) Preset 3: Low Cut/High Boost (-3 dB at 180 Hz, +6 dB at 10 kHz) Preset 4: High Boost (+6 dB at 10 kHz)
Signal-to-noise ratio (1 mV, peak deviation)	$\geq 110$ dBA
Total harmonic distortion (THD)	$\leq 0.9$ %
AF output voltage (at peak deviation, 1 kHz AF)	6.3 mm jack socket (unbalanced): +12 dBu XLR socket (balanced): +18 dBu
Setting range "AF Out"	48 dB (3 dB steps)
<b>Overall device</b>	
Temperature range	-10 °C to +55 °C
Power supply	12 V DC
Current consumption	300 mA
Dimensions	Approx. 190 x 212 x 43 mm
Weight	Approx. 980 g

## CONNECTIONS

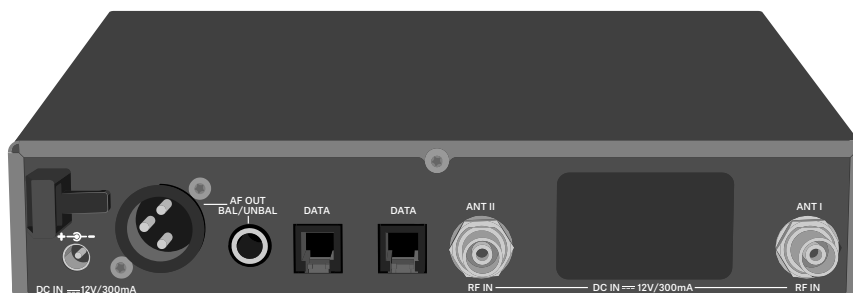



# evolution wireless G4

## ew 100 G4-835-S | ew 100 G4-845-S | ew 100 G4-865-S | Vocal Set

### SPECIFICATIONS

#### SKM 100 G4-S

RF characteristics	
Modulation	Wideband FM
Frequency ranges	A1: 470 - 516 MHz A: 516 - 558 MHz AS: 520 - 558 MHz G: 566 - 608 MHz GB: 606 - 648 MHz B: 626 - 668 MHz C: 734 - 776 MHz D: 780 - 822 MHz E: 823 - 865 MHz JB: 806 - 810 MHz K+: 925 - 937.5 MHz 1G8: 1785 - 1800 MHz
Transmission frequencies	Max. 1680 receiving frequencies, adjustable in 25 kHz steps  20 frequency banks, each with up to 12 factory-preset channels, no intermodulation  1 frequency bank with up to 12 programmable channels
Switching bandwidth	up to 42 MHz
Nominal/peak deviation	$\pm 24$ kHz / $\pm 48$ kHz
Frequency stability	$\leq \pm 15$ ppm
RF output power at 50 $\Omega$	Max. 30 mW
Pilot tone squelch	Can be switched off

#### AF characteristics

Compander system	Sennheiser HDX
AF frequency response	80 - 18,000 Hz
Signal-to-noise ratio (1 mV, peak deviation)	$\geq 110$ dBA
Total harmonic distortion (THD)	$\leq 0.9$ %
Max. input voltage	3 V <sub>eff</sub>
Input impedance	40 k $\Omega$
Input capacitance	Switchable
Setting range for input sensitivity	48 dB, adjustable in 6 dB steps

#### Overall device

Temperature range	-10 °C to +55 °C
Power supply	2 AA batteries, 1.5 V or BA 2015 accupack
Nominal voltage	3 V battery / 2.4 V rechargeable battery
Current consumption	at nominal voltage: typ. 180 mA with transmitter switched off: $\leq 25$ $\mu$ A
Operating time	Typically 8 h
Dimensions	Approx. $\varnothing$ 50 x 265 mm
Weight (incl. batteries)	approx. 450 g

### SPECIFICATIONS

#### MMD 835-1

Transducer principle	dynamic
Sensitivity	2.1 mV/Pa
Sound pressure level	154 dB SPL
Pick-up pattern	cardioid

#### MMD 845-1

Transducer principle	dynamic
Sensitivity	1.6 mV/Pa
Sound pressure level	154 dB SPL
Pick-up pattern	supercardioid

#### MME 865-1

Transducer principle	pre-polarized condenser microphone
Sensitivity	1.6 mV/Pa
Sound pressure level	152 dB SPL
Pick-up pattern	supercardioid



# evolution wireless G4

## ew 100 G4-835-S | ew 100 G4-845-S | ew 100 G4-865-S | Vocal Set

### PRODUCT VARIANTS

#### Made in Germany

<b>ew 100 G4-835-S-A1</b>	470 - 516 MHz	Art. no. 507534
<b>ew 100 G4-835-S-A</b>	516 - 558 MHz	Art. no. 507535
<b>ew 100 G4-835-S-GB</b>	606 - 648 MHz	Art. no. 507536
<b>ew 100 G4-835-S-G</b>	566 - 608 MHz	Art. no. 507537
<b>ew 100 G4-835-S-B</b>	626 - 668 MHz	Art. no. 507538
<b>ew 100 G4-835-S-C</b>	734 - 776 MHz	Art. no. 507539
<b>ew 100 G4-835-S-E</b>	823 - 865 MHz	Art. no. 507540
<b>ew 100 G4-835-S-1G8</b>	1785 - 1800 MHz	Art. no. 507541
<b>ew 100 G4-835-S-K+</b>	925 - 937.5 MHz	Art. no. 507542
<b>ew 100 G4-835-S-TH</b>	794 - 806 MHz	Art.-no. 508578
<b>ew 100 G4-845-S-A1</b>	470 - 516 MHz	Art. no. 507543
<b>ew 100 G4-845-S-A</b>	516 - 558 MHz	Art. no. 507544
<b>ew 100 G4-845-S-GB</b>	606 - 648 MHz	Art. no. 507545
<b>ew 100 G4-845-S-G</b>	566 - 608 MHz	Art. no. 507546
<b>ew 100 G4-845-S-B</b>	626 - 668 MHz	Art. no. 507547
<b>ew 100 G4-845-S-C</b>	734 - 776 MHz	Art. no. 507548
<b>ew 100 G4-845-S-E</b>	823 - 865 MHz	Art. no. 507549
<b>ew 100 G4-845-S-1G8</b>	1785 - 1800 MHz	Art. no. 507552
<b>ew 100 G4-845-S-K+</b>	925 - 937.5 MHz	Art. no. 507551
<b>ew 100 G4-845-S-TH</b>	794 - 806 MHz	Art.-no. 508579
<b>ew 100 G4-865-S-A1</b>	470 - 516 MHz	Art. no. 507552
<b>ew 100 G4-865-S-A</b>	516 - 558 MHz	Art. no. 507553
<b>ew 100 G4-865-S-GB</b>	606 - 648 MHz	Art. no. 507554
<b>ew 100 G4-865-S-G</b>	566 - 608 MHz	Art. no. 507555
<b>ew 100 G4-865-S-B</b>	626 - 668 MHz	Art. no. 507556
<b>ew 100 G4-865-S-C</b>	734 - 776 MHz	Art. no. 507557
<b>ew 100 G4-865-S-E</b>	823 - 865 MHz	Art. no. 507558
<b>ew 100 G4-865-S-1G8</b>	1785 - 1800 MHz	Art. no. 507559
<b>ew 100 G4-865-S-K+</b>	925 - 937.5 MHz	Art. no. 507560

#### Assembled in USA

<b>ew 100 G4-835-A1</b>	470 - 516 MHz	Art. no. 507886
<b>ew 100 G4-835-A</b>	516 - 558 MHz	Art. no. 507886
<b>ew 100 G4-835-AS</b>	520 - 558 MHz	Art. no. 507888
<b>ew 100 G4-835-G</b>	566 - 608 MHz	Art. no. 507889
<b>ew 100 G4-835-B</b>	626 - 668 MHz	Art. no. 507890
<b>ew 100 G4-835-C</b>	734 - 776 MHz	Art. no. 507891
<b>ew 100 G4-835-D</b>	780 - 822 MHz	Art. no. 507892
<b>ew 100 G4-835-JB</b>	806 - 810 MHz	Art. no. 507893
<b>ew 100 G4-845-A1</b>	470 - 516 MHz	Art. no. 507894
<b>ew 100 G4-845-A</b>	516 - 558 MHz	Art. no. 507895
<b>ew 100 G4-845-AS</b>	520 - 558 MHz	Art. no. 507896
<b>ew 100 G4-845-G</b>	566 - 608 MHz	Art. no. 507897
<b>ew 100 G4-845-B</b>	626 - 668 MHz	Art. no. 507898
<b>ew 100 G4-845-C</b>	734 - 776 MHz	Art. no. 507899
<b>ew 100 G4-845-D</b>	780 - 822 MHz	Art. no. 507900
<b>ew 100 G4-865-A1</b>	470 - 516 MHz	Art. no. 507901
<b>ew 100 G4-865-A</b>	516 - 558 MHz	Art. no. 507902
<b>ew 100 G4-865-AS</b>	520 - 558 MHz	Art. no. 507903
<b>ew 100 G4-865-G</b>	566 - 608 MHz	Art. no. 507904
<b>ew 100 G4-865-B</b>	626 - 668 MHz	Art. no. 507905
<b>ew 100 G4-865-C</b>	734 - 776 MHz	Art. no. 507906
<b>ew 100 G4-865-D</b>	780 - 822 MHz	Art. no. 507907




# evolution wireless G4

ew 100 G4-835-S | ew 100 G4-845-S |  
ew 100 G4-865-S | Vocal Set

## DIMENSIONS

### EM 100 G4

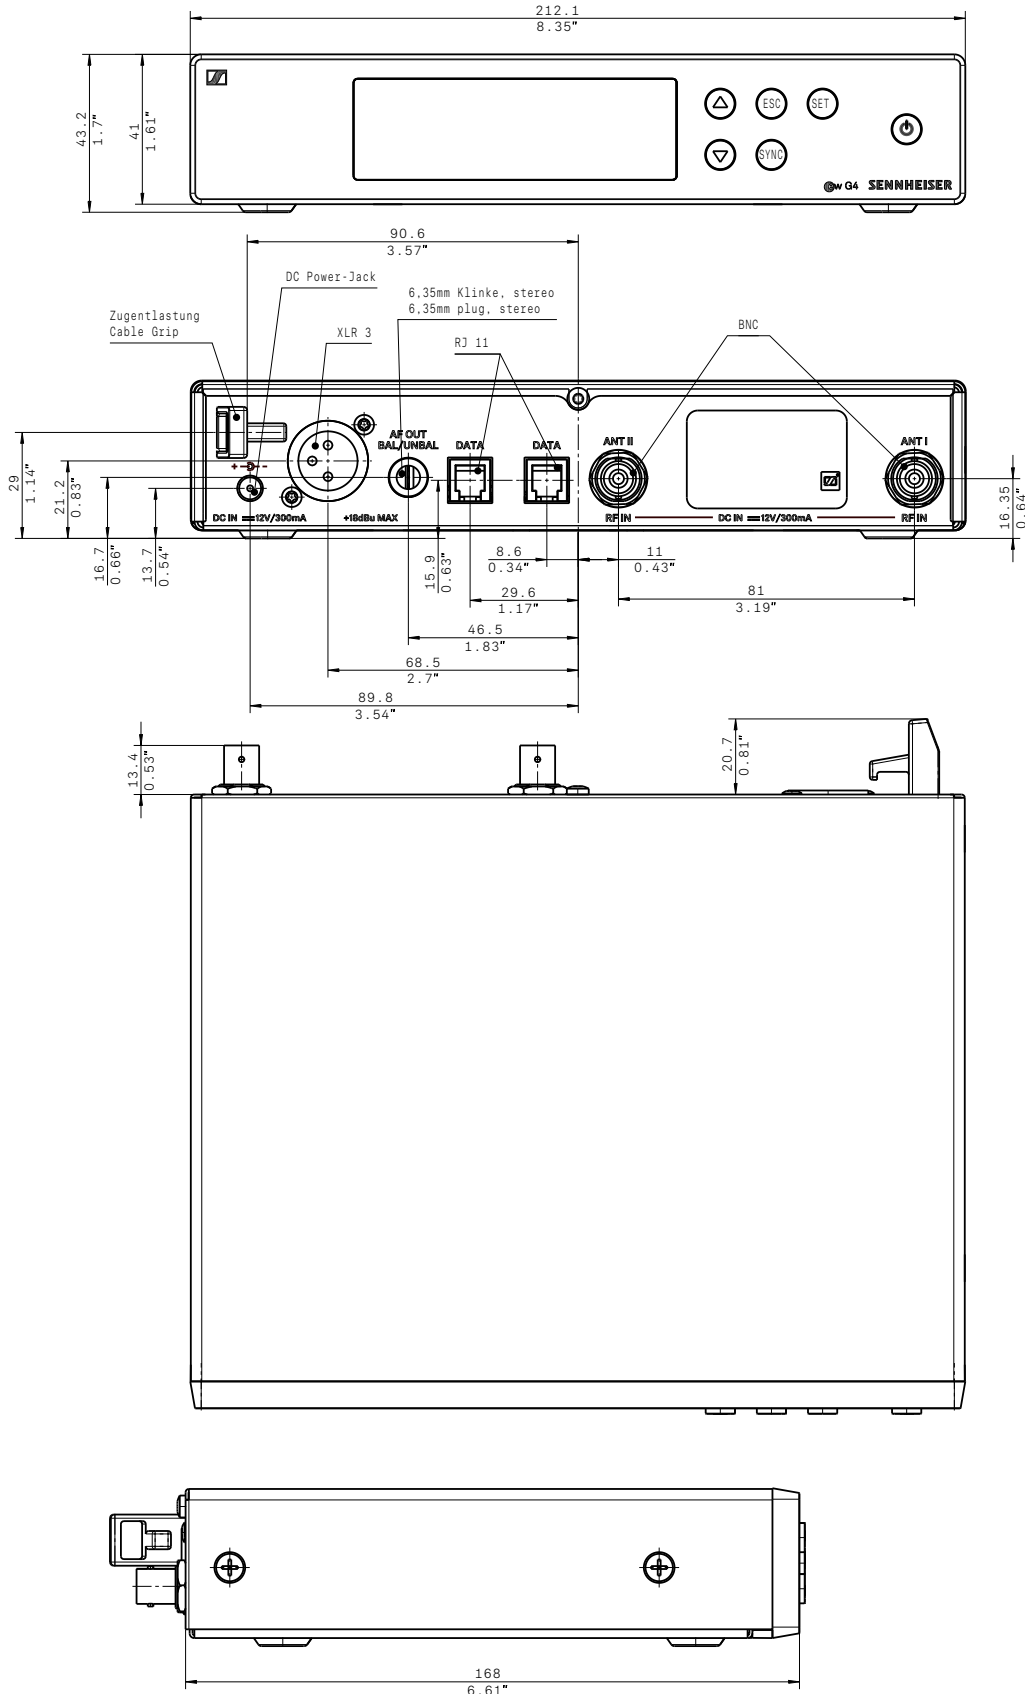






# evolution wireless G4

ew 100 G4-835-S | ew 100 G4-845-S |  
ew 100 G4-865-S | Vocal Set

## DIMENSIONS

### SKM 100 G4-S

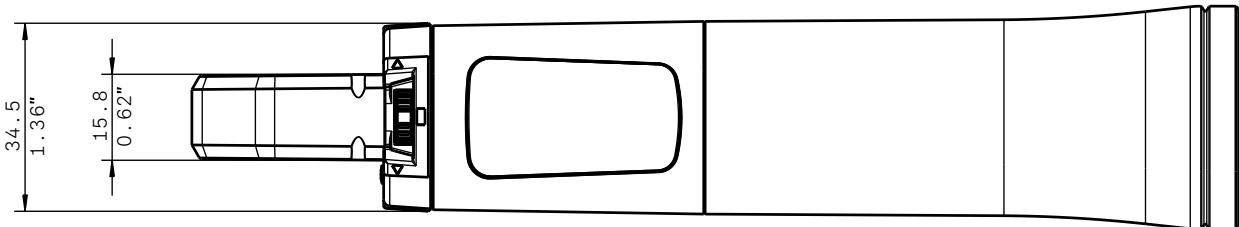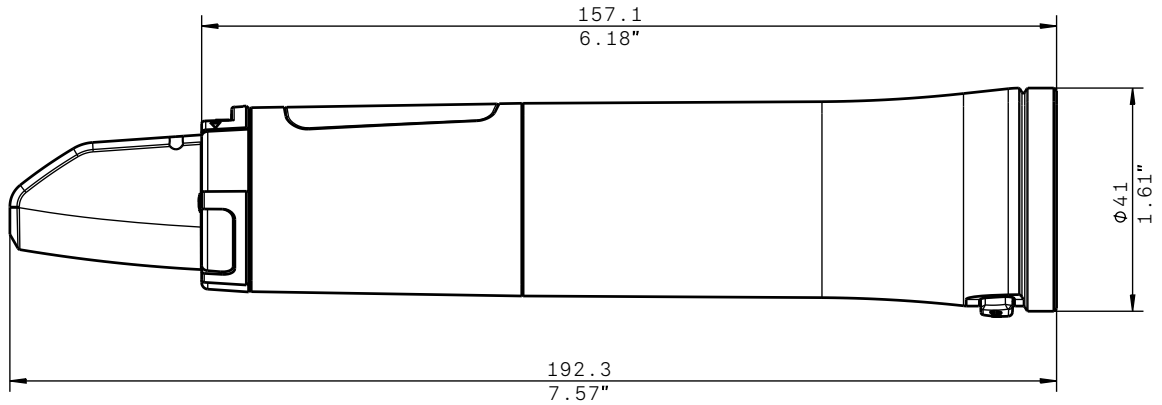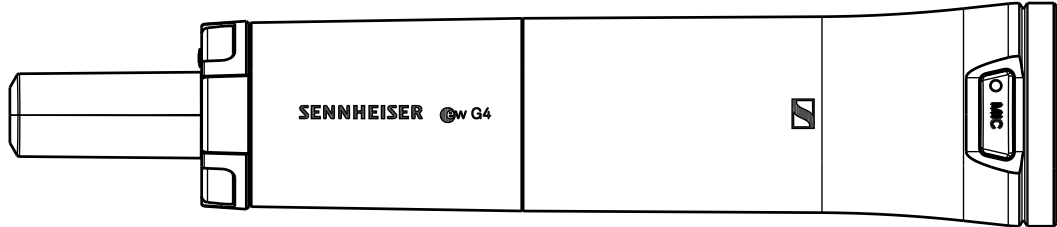



# evolution wireless G4

## ew 100 G4-835-S | ew 100 G4-845-S | ew 100 G4-865-S | Vocal Set

### ARCHITECT'S SPECIFICATION

A wireless RF transmission system consisting of a stationary receiver and a handheld transmitter including a microphone head.

The system shall operate within twelve UHF frequency ranges, with a switching bandwidth of up to 42 MHz: 470 – 516 MHz, 516 – 558 MHz, 520 – 558 MHz, 566 – 608 MHz, 606 – 648 MHz, 626 – 668 MHz, 734 – 776 MHz, 780 – 822 MHz, 823 – 865 MHz, 806 – 810 MHz, 925 – 937.5 MHz, 1785 – 1800 MHz; receiving frequencies shall be 1,680 per range and shall be tunable in 25 kHz steps. The system shall feature 20 fixed frequency banks with up to 12 compatible frequency presets and 1 user bank with up to 12 user programmable frequencies.

The receiver shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of RF level, metering of AF level, lock status, pilot tone evaluation, muting function, and battery status of the associated transmitter. An auto-lock feature shall be provided to prevent settings from being accidentally altered. The receiver shall feature an integrated guitar tuner and shall provide a sound check mode.

Some receiver parameters such as receiving frequency, receiver name and pilot tone setting shall be synchronizable with the associated transmitter via an integrated infrared interface.

The receiver shall feature a balanced XLR-3M audio output with a maximum output of +18 dBu along with an unbalanced ¼" (6.3 mm) audio output with a maximum output of +12 dBu. The receiver shall have two DATA ports (RJ 10) to set up a multichannel system. Two BNC-type input sockets shall be provided for connecting the antennas. Nominal/peak deviation shall be  $\pm 24$  kHz/ $\pm 48$  kHz. Squelch threshold shall be adjustable to three levels: Low (5 dB $\mu$ V), Middle (15 dB $\mu$ V) and High (25 dB $\mu$ V).

The receiver shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Sensitivity shall be  $< 2$   $\mu$ V for 52 dBA eff S/N with HDX engaged at peak deviation. Adjacent channel rejection shall be  $\geq 65$  dB (typical). Intermodulation attenuation shall be  $\geq 65$  dB (typical); blocking shall be  $\geq 70$  dB. Four selectable equalizer presets shall be provided: "Flat", "Low Cut" ( $-3$  dB at 180 Hz), "Low Cut/High Boost" ( $-3$  dB at 180 Hz/ $+6$  dB at 10 kHz) and "High Boost" ( $+6$  dB at 10 kHz). Signal-to-noise ratio at 1 mV and peak deviation shall be  $\geq 110$  dBA. Total harmonic distortion (THD) shall be  $\leq 0.9$  %. The audio output level shall be adjustable within a 48 dB range in steps of 3 dB.

The receiver shall operate on 12 V power supplied from the NT 2-3 CW mains unit (for 100 – 240 V AC, 50/60 Hz). Power consumption shall be 300 mA. The receiver shall have a rugged metal housing; dimensions shall be approximately 190 x 212 x 43 mm (7.48" x 8.35" x 1.69"). Weight shall be approximately 980 grams (2.16 lbs). Operating temperature shall range from  $-10$  °C to  $+55$  °C ( $+14$  °F to  $+131$  °F).

The receiver shall be the Sennheiser EM 100 G4.

The radio microphone shall be menu-driven with a backlit LC display showing the current frequency, frequency bank and channel number, metering of AF level, transmission status, lock status, pilot tone transmission, muting function, and battery status. An auto-lock feature shall be provided to prevent settings from being accidentally altered.

The radio microphone parameters shall either be configurable in the associated receiver's menu and synchronized with the radio microphone via an integrated infrared interface or shall be programmable in the radio microphone menu. Receiver parameters such as receiving frequency, receiver name and pilot tone setting shall be synchronizable with the radio microphone via an integrated infrared interface.

The handheld vocal radio microphone shall be equipped with a mute switch, which shall be switchable between "AF on/off", "RF on/off" and "Disabled" via the user interface. Nominal/peak deviation shall be  $\pm 24$  kHz/ $\pm 48$  kHz. Frequency stability shall be  $\leq \pm 15$  ppm. RF output power at 50  $\Omega$  shall be 30 mW (typical).

The radio microphone shall incorporate the Sennheiser HDX compander system and a defeatable pilot tone squelch. Audio frequency response shall range from 80 – 18,000 Hz. Signal-to-noise ratio at 1 mV and peak deviation shall be  $\geq 110$  dBA. Total harmonic distortion (THD) shall be  $\leq 0.9$  %. Input sensitivity shall be adjustable within a 48 dB range in steps of 6 dB.

Power shall be supplied to the radio microphone by two 1.5 V AA size batteries or by one Sennheiser BA 2015 rechargeable accupack. Nominal voltage shall be 2.4 V, current consumption shall be typical 180 mA at nominal voltage;  $\leq 25$   $\mu$ A when radio microphone is switched off. Operating time shall be typical 8 hours. The radio microphone shall have a rugged metal housing; dimensions shall be approximately 50 mm (1.97") in diameter and 265 mm (10.43") in length. Weight including the batteries shall be approximately 450 grams (0.99 lbs). Operating temperature shall range from  $-10$  °C to  $+55$  °C ( $+14$  °F to  $+131$  °F).

A range of microphone heads shall be available for the radio microphone.

The radio microphone shall be the Sennheiser SKM 100-S G4.