

# CORIO®master micro

## C3-503 Series



### Key Features

- Patented CORIO®3 Videowall processing technology
- Manage up to 2 videowalls
- Uses **CORIO**grapher v2; simple powerful software interface
- Live dashboard to switch presets and window sources
- **NEW** 4K Input & Output modules
- **NEW** Custom Resolution Editor with resolutions auto detected on inputs & selectable on the outputs
- **NEW** Streaming Media & 4K Playback Module
- Create custom output resolutions
- Auto discover devices on the network
- Outputs rotated in 1° increments
- Combination of different size and resolution of displays can be used
- Adjustable bezel compensation
- Multi-Edge blending of projectors
- Universal DVI Inputs: (HDMI/DVI/CV/YC/RGB/YPbPr)
- DVI-I Outputs: (HDMI/DVI/RGB/YPbPr)
- **NEW** 4K HDBaseT Inputs
- HDBaseT Outputs
- SDI Inputs and Outputs: SD/HD-SDI/3G-SDI to 1080p60
- High Resolution Inputs/Outputs: Analog: PC to 1920x1080, HDTV to 1080p/60
- DVI: PC to 1920x1200, HDTV to 1080p/60 w/EDID
- HDMI input & output with HDCP handling
- Up-Down-Cross Conversion
- Control: RS-232, IP
- Command Line Interface – Third party control
- AMX & Crestron modules available
- 1RU, Half Rack Frame size
- Modularity Provides Flexible I/O

### Options

- **ONERack™** mounting module
- Dual rack mount kit
- Universal DVI adapters
- Onsite System Commissioning

C3-503 CORIOmaster micro offers a new, more efficient approach to building Videowall systems. Using tvONE's latest CORIO®3 technology, it gives the user access to new levels of video processing power to achieve new heights of creative and dynamic videowall displays. All this is possible in one 1RU, half rack sized chassis.

Multiple windows can be used on a video wall to display the physical inputs into CORIOmaster. Windows can be sized to fit the wall or multiple windows added, resized and rotated 360 degrees on the video wall independent of the output rotation. Each Micro can support up to 2 separate videowalls and projector edge-blends with up to 14 windows depending on the source resolution, frame rate and size of windows.

### New 4K Input & Output Modules

The addition of 4K support consists of two new modules; HDMI 2.0 4K60 input module and the HDMI 1.4 4K30 scaling output module.

### New Streaming Media & 4K Playback Module

The Streaming Media & 4K Playback Input Module provides CORIOmaster systems with the ability to bring 2 network streams up to 1080p 60 @ 20mbps in to just 1 slot. As well as playback of 4k UHD or 2x 1080p60 video files. The Streaming Media Input Module also supports still images with full 4K rendering. And with at least 40mbps of total bandwidth you can easily provide high quality content to your video wall and projector edge-blend.

### New Transition Effects

CORIOgrapher v2, the control software for the CORIOmaster, CORIOmaster mini and CORIOmaster micro videowall processors now has included simple easy to use window and source transition effects. This new animation feature is controlled by presets in the system. Transition effects occur not only by selecting presets in CORIOgrapher but also by third party control systems.

Building of presets in the system now save one or any combination of the following window transition effects as part of a single preset:

- **Preset Duration** – 0 to 60.0 seconds
- **Fade through Black** – Source change occurs in black
- **Horizontal Shrink and Expand** – Image shrinks horizontally with source change in the middle and then expands back to previous window size
- **Vertical Shrink and Expand** – image shrinks vertically with source change in the middle and then expands back to previous window size
- **Spin** – Both left and right rotation up to 7 times in either direction with source change in the middle of the duration.
- **Size** – Windows can be sized accordingly and saved in the preset
- **Rotation** – Windows can be rotated independent of Source Spin in 359°/+359°.
- **Movement** – place a window in the desired location on the videowall.

# CORIO®master micro

## C3-503 Series

### DVI Modules

tvONE Universal DVI modules allow for direct connections to most common analog or digital sources and destinations.

Custom DVI-I adapters provide connections for: Composite, S-Video, component, VGA, RGBHV and HDMI (DVI-D connects directly).

A DVI module provides 2 connections per AV Slot.

- Universal DVI Input Module
- DVI Scaling Output Module, Same as Universal DVI minus the CV and S-video capability.

### HDBaseT Module

- HDBaseT Scaling Output Module - 2 HDBaseT Outputs w/Ethernet
- **NEW** 4K HDBaseT Input Module - 2 HDBaseT Inputs w/Ethernet

### SDI Modules

- 3G/HD/SD-SDI Input Module - 2 Inputs
  - HD/SD-SDI Input Module - 4 Inputs
  - 3G/HD/SD-SDI Scaling Output Module - 2 Outputs
- The scaling 3G/HD/SD-SDI output module allows any source to be converted to SD-SDI, HD-SDI or 3G-SDI for output.<sup>†</sup>

### 4K Modules

- 4K30/60 Input module – 2 inputs
- 4K30 Scaling Output module – 1 output

### Streaming Media & 4K Playback Module

- Combine Streaming, File Playback and Still Images for each Video Channel
- 2 Video channels 4K/30 & HD or Dual HD Media playback
- Dual Channel HD streaming over IP
- 8K Still Image support<sup>2</sup>
- USB 3.0 port for file playback
- Up to 128GB Internal SSD Storage for content<sup>3</sup>

### Future Modules

Additional types and formats of modules will be added.

### Main Chassis

C3-503 Main Chassis w/button Front Panel 3 Slots available for Video Modules Up to 6 I/O for DVI, HDMI, 3G-SDI, RGB/YPbPr, IP Stream Single Power Supply Interfaces for RS-232 & IP S/PDIF Audio output

### Input Modules

CM-DVIU-2IN 2x via DVI-I Connectors  
CM-3GSDI-2IN 2x (3G/HD/SD-SDI) via BNC  
CM-HDSDI-4IN 4x (HD/SD-SDI) via BNC  
CM-HDMI-4K-2IN 2x HDMI  
CM-AVIP-IN-1USB-1ETH Dual Streaming & Content playback  
CM-HDBT-2IN-1ETH 2x via HDBaseT with 1x Ethernet

### Scaling Output Modules

CM-DVI-I-SC-2OUT 2x via DVI-I (minus CV & S Video)  
CM-3GSDI-SC-2OUT 2x via BNC (3G/HD/SD-SDI)  
CM-HDBT-SC-2OUT-1ETH 2x via HDBaseT with 1x Ethernet  
CM-HDMI-4K-SC-1OUT 1x via HDMI

Note: Full A-to-D or D-to-A, Format and Framerate Conversion is provided with Scaling Output Modules.

### Options

FE-1 On-site System Commissioning

Optional DVI-U Adapters

ZDH2050 Composite Video Adapter DVI-I Male to BNC Female

ZDB2048 YC (S-Video) Adapter DVI-I Male to 2-BNC Female

ZDS2046 YC (S-Video) Adapter DVI-I Male to 4-Pin Mini-Din Female

Optional DVI-I Output Adapters & DVI-U Input Adapters

ZDH2040 Analog PC Adapter DVI-I Male to HD-15 Female

ZDB2038 1.5' (0.5m) Analog RGBHV Adapter Cable DVI-I Male to 5 BNC Female

ZDB2044 1.5' (0.5m) YPbPr/YUV Adapter Cable DVI-I Male to 3-BNC Female

ZDB2042 YPbPr/YUV Adapter DVI-I Male to 3-RCA Female

CMD1941 HDMI Adapter DVI-I Male to HDMI Female

# CORIO®master micro

## C3-503 Series

### Specifications

<b>Video Processing Power</b>	
Parallel Processing Architecture	Yes
CORIO3 Video Processing	Yes
Real Time Video Quality	Yes
Up/Down/Cross Conversion	Yes
Number of Video walls	2
Display Size Compensation	Yes, different sizes in video walls
Output Rotation	Yes for any outputs and windows
Projector Edge Blending	Yes
HDCP Key Handling	Yes
<b>Computer Input</b>	
Digital DVI	Up to 4 via Universal DVI (HDMI & HDCP compatible)
Analog	Up to 4 via Universal DVI
Analog Format	RGBHV, RGBS, RGsB, YPbPr
Analog Sync	TTL Level, 10KΩ, Pos or Neg
RGB Level Range	0.5-2.0 Vp-p
Scan Rate Detection	Automatic
Analog Signals	PC to 1920x1080, HD to 1080p60
DVI Signals	PC to 1920x1200, HD to 1080p60
Max Horizontal Scan Rate	150kHz
<b>Computer Outputs</b>	
DVI Signals	Up to 4 via DVI-I (HDMI & HDCP compatible)
Analog	Up to 4 via DVI-I
Analog format	RGBHV, RGBS, RGsB, YPbPr
R-G-B Level	0.7 Vp-p
DVI Signals	PC to 1920x1200, HD to 1080p60 w/EDID
Analog Signals	PC to 1920x1080, HD to 1080p60
Vertical Refresh Rate	Any to 250Hz
Size and Position	User Adjustable
Settings Memory	Non-Volatile
Conversion Technology	Proprietary – CORIO®3
Color	RGB/DVI/HDMI/YPbPr 24-bit 4:4:4, SDI 20-bit 4:2:2
Max. Sampling Rate	162MHz
Firmware Memory	Flash, Upgradeable via download
Video Comb Filter	Adaptive
Video Adjustments	Contrast, Brightness, RGB Gamma
<b>HD Video Resolutions supported (HDMI, DVI, YPbPr, SDI, &amp; HDBaseT)</b>	
720p (1280x720) *	23.98, 24, 25, 29.97, 30, 50, 59.94, 60Hz
1035i (1920x1035)	59.94, 60Hz
1080i (1920x1080)	50, 59.94, 60Hz
1080p (1920x1080)	23.98, 24, 25, 29.97, 30Hz, 50, 59.94, 60Hz
<b>4K Video Input Resolutions supported (via HDMI &amp; HDBaseT)</b>	
3840x2160: 4:4:4	23.98/24/25/29.97/30Hz 8-bit
3840x2160: 4:2:0	50/59.94/60Hz 8-bit
4096x2160: 4:2:0	50/59.94/60Hz 8-bit
<b>4K Video Output Resolutions supported (via HDMI)</b>	
3840x2160: 4:4:4	23.98/24/25/29.97/30Hz 8-bit
<b>Video Inputs</b>	
Television Standards	NTSC, PAL
Composite Video	Up to 4 via DVI
YC (S-Video)	Up to 4 via DVI
YUV /YPbPr	Up to 4 via DVI
SD/HD-SDI	Up to 8 via BNC
SD/HD/3G-SDI	Up to 4 via BNC
4K/30	Up to 4 via HDMI & HDBaseT
4K60	Up to 2 via HDMI & HDBaseT
HDBaseT	Up to 4 via RJ45

<b>AV over IP</b>	
Interface	Up to 2x 1 GbE Ethernet Port
IP Video Decoding	H.264 (CBP, Main, High), H.265/HEVC1 (Main)
IP Bit Rates	Up to 4x streams up to 25Mbps per stream
Colour Depth	4:2:0, 4:2:2
Supported IP Resolutions	Configurable to 1920x1080p60
Unicast Streams	RTSP, RTMP, HTTP, MPEG-TS
Multicast Streams	RTSP, MPEG-TS
<b>Media/Images</b>	
Interfaces	Up to 2x USB3.0, Internal Storage <sup>1</sup> , Network <sup>1</sup>
Video Codecs	H.264 (CBP, Main, High), H.265/HEVC1 (Main)
Video Formats	mp4, .mov, .mkv, .m4v, .ts, .mts, .m2ts, .m2
Playback Bit Rates	Single stream to 100Mbps (per module), Dual Streams to 40Mbps (per module)
<b>File Playback Resolutions Supported</b>	
Up to 3480x2160@30fps	Up to 2
Up to 1080p60@60fps	Up to 4
Up to 7680 x 4320	Still images <sup>2</sup>
<b>Media Handling</b>	
External	Up to 2x USB 3.0 Interface
Supported devices	Flash file systems FAT, FAT32, ext3, ext4, NTFS
Internal	High speed storage up to 128GB <sup>3</sup> per module
Remote	File transfer supported <sup>3</sup>
<b>Video Outputs</b>	
YUV /YPbPr	Up to 4 via DVI
SD/HD/3G-SDI	Up to 4 via BNC
HDBaseT	Up to 4 via RJ45
4K	Up to 2 via HDMI
<b>3G/HD/SD-SDI</b>	
SMPTE259M-C (SD-SDI Video)	270Mbps < 0.1UI jitter 525/625Line
SMPTE292M (HD-SDI Video)	1.485/1.4835Gbps < 0.2 UI jitter 720p, 1035i, 1080i, 1080p
SMPTE424M (3G-SDI Video)	2.97/2.967Gbps < 0.3 UI jitter 1080p 60/59.94
<b>Control Methods</b>	
RS-232	via D9 Female Connector
IP Interface	RJ45 Connector
<b>Warranty</b>	
Limited Warranty	5 Years Parts and Labor
<b>Regulatory Compliance</b>	
Main unit	FCC, CE, RoHS, UL
<b>Mechanical</b>	
Size (H x W x D)	1.73" x 8.54" x 9.61" (44 x 217 x 244mm)
Weight (Net)	TBD
<b>Environmental</b>	
Operating Temperature	0° to +40°C (+32° to +104°F)
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70° C (+14° to +158° F)
Storage Humidity	10% to 85%, Non-condensing
MTBF	Approximately 50,000 hours
BTU	205 BTU/hr
<b>Power</b>	
External Power Supply	110v to 240v auto-detecting
Redundancy	not available
Consumption	60 watts maximum (fully populated)
<sup>1</sup> Planned update via Firmware	
<sup>2</sup> Images will be rendered to 4K	
<sup>3</sup> Future Release	

Specifications subject to change

\* DVI Input module only supports 720p frame rates 50,59.94, & 60Hz


\*HDCP protected sources are not allowed to be converted in this way

# CORIO®master micro

## C3-503 Series

### Modular Flexibility

CORIOmaster can accommodate numerous I/O configurations in the 16 universal video slots available; when inserted, the modules are automatically recognized & configured. This flexibility allows end user configurations to be based on their own needs.

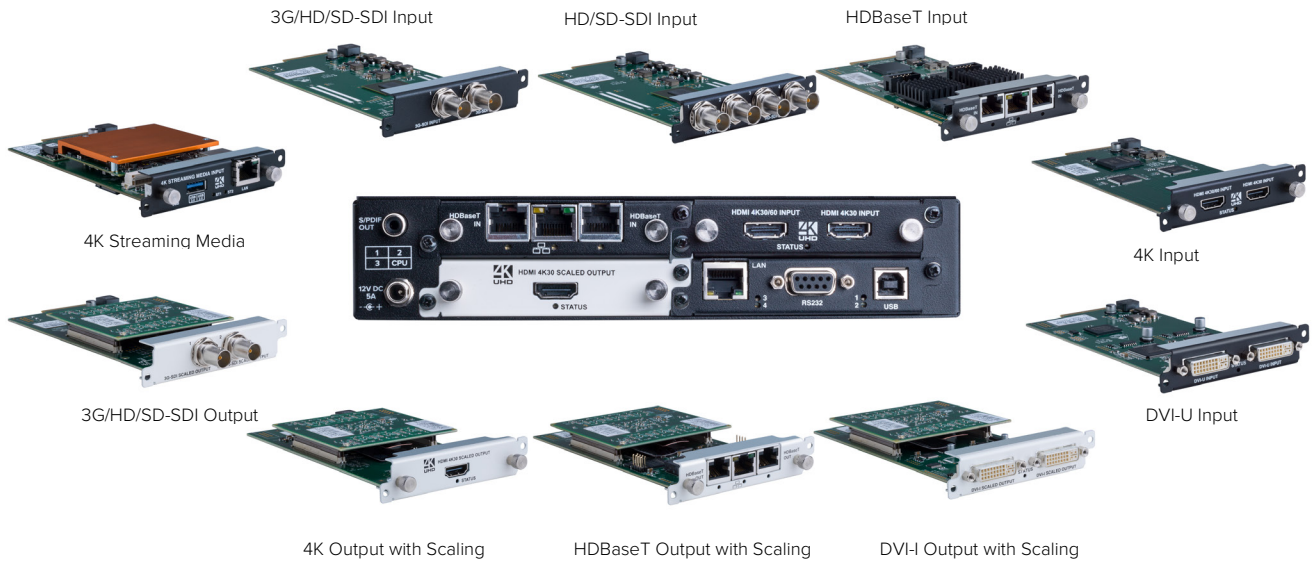

### Mounting options



RM-503-1RU-DUAL C3-503 Dual Rack Mounting Faceplate, in 1RU



RM-503-SRF C3-503 Surface Mount; brackets allow for under table or behind monitor mounting

RM-503-1RK-MOD C3-503 ONErack Mounting Module, fits in 6RU ONErack chassis.

